NACOmatic

Effective: 23-Sep-2010 Expires: 18-Nov-2010



Warranty

availability, applicability and/or correctness of any of the information in this document. The official, original NACO documents are available for your downloading pleasure

I make absolutely no warranty nor guarantee whatsoever about the accuracy,

Copyright

treaties.

This compilation is protected by US copyright laws and international copyright

from: http://naco.faa.gov/index.asp?xml=naco/onlineproducts

Limitations

prohibited.

The sale, hosting and/or distribution of this document in any and all forms, is

Release from Liability

All users of this compilation must agree to be legally bound hereby, that Douglas R.

Ranz ("Released Party") SHALL NOT BE LIABLE FOR MY DEATH OR INJURY TO MY PERSON, OR FOR ANY LOSS FOR DAMAGE TO MY PROPERTY OR REPUTATION caused

in any manner whatsoever, whether attributable to the negligence of the Released Party, or for any other reason, occurring during the time that I am operating an aircraft.

I do hereby waive any right of action against the Released Party from any and all causes or claims that I may have against them from the beginning of time. I further agree not to sue on any such cause or claim. This agreement shall not release

liability for gross negligence or willful misconduct of the Released Party. I agree to indemnify and hold the Released Party harmless for any losses, judgments, damages

or fees he may incur, including but not limited to attorneys fees, arising out any lawsuit related to the planning, flight and/or enforcement of or legal challenge to this agreement. It is my intention that this agreement be interpreted and enforced to the maximum extent allowed by Michigan law.

Kindl	le-DX	Index;	by	Apt	:ID		Use	"Menu",	then	"Goto	Page
		-	-	-				-			_
00s	=>	45	U.A	70	=>	27					
03s	=>	58		_	-						
05s	=>	62									
12S	=>	46									
16S	=>	46									
17S	=>	47									
22S	=>	49									
24S	=>	50									
25U	=>	40									
26U	=>	45									
28U	=>	49									
35ຣ	=>	62									
45S	=>	59									
56s	=>	59									
61J	=>	50									
61s	=>	33									
62S	=>	31									
64S	=>	55									
77S	=>	33									
AST	=>	27									
BDN	=>	29									
BKE	=>	28									
BNO	=>	30									
BOK	=>	29									
CVO	=>	32									1
CZK	=>	30									į
DLS	=>	61									ļ
EUG	=>	36									ļ
GCD	=>	41									ļ
HIO	=>	51									1
HRI	=>	39									į
JSY	=>	41									ļ
LGD	=>	42									ļ
LKV	=>	43									ļ
LMT	=>	42									ļ
MFR	=>	46									ļ
MMV	=>	45									1
ONO		49									į
ONP	=>	47									ļ
OTH	=>	48									ļ
PDT	=>	50									ļ
PDX	=>	52									ļ
PFC	=>	49									1
RBG	=>	57									1
RDM	=>	56									ļ
REO	=>	57									1
S49	=>	62									ļ
SLE	=>	58									į
SPB	=>	59									
TMK	=>	61									
TTD	=>	54									

GENERAL INFORMATION This Airport/Facility Directory is a Civil Flight Information Publication published and distributed every eight weeks by the FAA

Department of Transportation, National Aeronautical Navigation Services, Silver Spring, Maryland 20910. It is designed fo

This directory contains all open to the public airports, seaplane bases and heliports, military facilities, and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally, this directory contains communications data

Military data contained within this publication is provided by the National Geospatial-Intelligence Agency and is intended to provide reference data for military and/or joint civil/military airports. Not all military data contained in this publication is

use with Aeronautical Charts covering the conterminous United States, Puerto Rico and the Virgin Islands.

FOR AIRPORT SUPPLEMENT REVISIONS FORM VISIT WEB SITE: http://nfdc.faa.gov/portal/airportchanges.do FAA, Aeronautical Information Services, ATO-R, Rm. 626

CRITICAL information such as equipment malfunction, abnormal field conditions, hazards to flight, etc., should be reported as

soon as possible to the nearest FAA facility, either in person or by reverse charge telephone call.

CORRECTIONS, COMMENTS, AND/OR PROCUREMENT

800 Independence Ave., SW

navigational facilities and certain special notices and procedures.

Washington, DC 20591

Telephone 1-866-295-8236

applicable to civil users.

Fax 202-267-5322

Email 9-ATOR-HQ-AIS-AIRPORTCHANGES@FAA.GOV

NOTICE: Changes must be received by the Aeronautical Information Services as soon as possible but not later than the "cut-off" dates listed below to assure publication on the desired effective date.

	Airport Information	Airspace Information*
Effective Date	Cut-off date	Cut-off date
23 Sep 10	11 Aug 10	22 Jul 10
18 Nov 10	6 Oct 10	16 Sep 10
13 Jan 11	1 Dec 10	11 Nov 10
10 Mar 11	26 Jan 11	6 Jan 11
5 May 11	23 Mar 11	3 Mar 11
30 Jun 11	18 May 11	28 Apr 11

^{*}Including changes to preferred routes and graphic depictions on charts.

FOR CHARTING ERRORS CONTACT:

FAA, National Aeronautical Navigation Services

SSMC-4 Sta. #4435

1305 East West Highway

Silver Spring, MD 20910-3281

Telephone 1-800-626-3677

Email 9-AMC-Aerochart@faa.gov

Frequently asked questions (FAQs) are answered on our website at http://aeronav.faa.gov.

See the FAQs prior to contact via toll free number.

FOR PROCUREMENT CONTACT:

FAA, National Aeronautical Navigation Services

REDIS/Distribution Team

10201 Good Luck Road

Glenn Dale, MD 20769-9700

Online at http://aeronav.faa.gov

Email 9-AMC-Chartsales@faa.gov

Telephone 1-800-638-8972

Fax 301-436-6829

or any authorized chart agent.

New or Changed Information—To alert users of new information or changes to information from the previous issue, a vertica

line will be portrayed in the outside margin and extending the full length of the new and/or revised data. This will not apply to the front cover or the airport/facility directory listing.

This Airport/Facility Directory comprises part of the following sections of the United States Aeronautical Information Publication (AIP): GEN, ENR and AD.

GENERAL INFORMATION

TABLE OF CONTENTS

General Information	Inside F
Abbreviations	2
Directory Legend	4
Airport/Facility Directory	
ldaho	22
Montana	59
Oregon	104
Washington	141
Wyoming	195
City/Military Airport Cross Reference	216
Seaplane Landing Areas	217
Special Notices	218
Regulatory Notices	226
FAA and National Weather Service	
Telephone Numbers	227
Key to Aviation Weather Reports	228
Air Traffic Facilities Telephone Numbers	230
Air Route Traffic Control Centers	232
Flight Service Station Communication Frequencies	233
Flight Standards District Offices	236
Routes/Waypoints	
Low Altitude Directional Routes	237
High Altitude Preferred Routes	238
Q-Routes	239
RNAV Routing Pitch and Catch Points	242
VFR Waypoints	253
VOR Receiver Check	261
Parachute Jumping Areas	264
Aeronautical Chart Bulletins	266

Supplemental Communication Reference

Airport Diagrams

National Weather Service (NWS) Upper Air Observing Stations

Enroute Flight Advisory Service (EFAS)

272

278

328

Inside E

GENERAL INFORMATION

US Army Flight Operations Detachment

Automated Flight Service Station

Reserve Command

above ground level

Approach Light System

Air Mobility Command

Auxiliary Power Unit

Air Reserve Station

Aircraft Starting Unit

Airport Traffic Control Tower

All Up Weight (gross weight)

Air Traffic Control

Airport Surface Detection Equipment-

Air Reserve Base

Air National Guard Station

Agriculture

Arresting Gear

Army heliport

altitude

approach

April

airport

Air Station

Model X

August

available

heacon

below

Armed Forces Reserve Center/Air Force

2

AFOD

AFRC

AFSS

AG A-GEAR

ΔGI

AHP

ALS

alt

AMC

ANGS

anch

Apr

APU

ARR

arpt

ARS AS

ASU

ATC

ATCT

Aug

ΔΠΙΜ

avhl

bcn

blo

ASDE-X

ABBREVIATIONS

The following abbreviations/acronyms are those commonly used within this Directory. Other abbreviations/acronyms m be found in the Legend and are not duplicated below. The abbreviations presented are intended to represent grammatic variations of the basic form. (Example-"req" may mean "request", "requesting", "requested", or "requests").

Army Air Field byd bevond AAF Airbase C Commercial Circuit (Telephone) AR CGAF Coast Guard Air Facility abv ahove ACC Air Combat Command: Area Control CGAS Coast Guard Air Station

Center CIV Civil

acft aircraft clsd closed

ADCC Air Defense Control Center comd command

approach end rwy CONUS Continental United States

AFR

CSTMS AFB Air Force Base Customs

Air Force Heliport ctc contact

AFHP

airfield control afld ctl

dalgt

Dec

DIAP

DoD

DSN

durn

eff

dsplcd

emerg

FOR

ETA

ETD

exc

extd

FRO

Feb

fld

flt

flw

Fri

GΑ

GCA

GS

haz

ΗQ

CONTINUED ON NEXT PAGE

NW. 23 SEP 2010 to 18 NOV 2010

FLIP

daylight

December

displaced

duration

effective

except

extend

February

field

flight

follow

Friday

glide angle

glide slope

Headquarters

hazard

emergency

End of Runway

DoD Instrument Approach Procedure

Defense Switching Network (Telephon

Department of Defense

Estimated Time of Arrival

fixed-base operator

Flight Service Station

Estimated Time of Departure

Flight Information Publication

Ground Controlled Approach

nni NS ARTMT

Instrument Approach Procedure ICAO International Civil Aviation Organization NSTD nonstandard IFR Instrument Flight Rules ntc notice

Instrument Landing System ohen

II S Inner Marker Oct

hr

ΙΔΡ

lan

JASU

IOAP

IRR

hul

lun

Κt LAA

lhs

Ida

lgtd

lgts LMM

LOC

LOM

MACC

MCAF

MCALE

MCAS

MCB

med

Mil

min

MIS

MM

Mon

MP

MSL

MSAW

NAAS

NADO

NAEC

NAES

NALCO

NALO NALE

NAS

NAWC

NAWS ngt

NOLF

Nov

NAF

NADEP

MFTRO

Mar

ltd

LAHSO

JOSAC

hour

January

July

June

Knots

nounds

landing

lighted

lights

Localizer

limited

March

medium

military

minute

Monday

Jet Aircraft Starting Unit

Joint Reserve Base

Local Airport Advisory

Land and Hold Short Operations

Compass locator at Middle Marker ILS

Compass locator at Outer Marker ILS

Marine Corps Auxiliary Landing Field

Military Area Control Center

Marine Corps Air Facility

Marine Corps Air Station

Pilot-to-Metro voice call

Middle Marker of ILS

Maintenance Period

mean sea level

Naval Air Depot

Naval Air Facility

Naval Air Station

Naval Outlying Field

night

November

Microwave Landing System

minimum safe altitude warning

Naval Air Development Center

Naval Air Engineering Center

Naval Air Engineering Station

Navy Air Logistics Office

Naval Air Warfare Center Naval Air Weapons Station

Naval Auxiliary Landing Field

Naval Air Logistics Control Office

Naval Auxiliary Air Station

Marine Corps Base

Joint Oil Analysis Program

Joint Operational Support Airlift Center

IM IMG Immigration OL F

increase opr

indefinite ago operations

incr

intensity

indef ints OTS

invof in the vicinity of ovrn

IMC

out of service overrun Instrument Meteorological Conditions PAEW personnel and equipment working

operate, operator, operational

Outlying Field

pat

p-line

PMSV

POI

PPR

PRM

PTD

rea

RAMCC

rgt tfc

RON

rar

retd

rwv

Sat

SELE

Sen

SFΔ

cfc

SFRA

SOAP

SOF

SPR

SR

std

Sun

SVC

tfc

thld

Thu

tkf

tmprv

tran

Tue

twr

twv

UC

USA

USAF

USCG

USN

VFR

VIP

VMC

Wed

wx

NW. 23 SEP 2010 to 18 NOV 2010

RSRS

October

observation

non precision instrument

Noise Abatement

pattern

request

require

runwav

Saturday

surface

sunrise

sunset

Sunday

service

threshold

Thursday

take-off temporary

transient

Tuesday

tower

taxiwav

Under Construction

United States Army

United States Navy

formerly AUTOVON)

Visual Flight Rules

Wednesday

weather

Very Important Person

United States Air Force

United States Coast Guard

Defense Switching Network (telephone,

Visual Meteorological Conditions

traffic

standard

Sentember

restricted

right traffic

power line

Pilot-to-Metro Service

Pilot to Dispatcher

Remain Overnight

Petrol, Oils and Lubricants

Precision Runway Monitoring

Regional Air Movement Control Center

reduced same runway separation

Single Frequency Approach

Special Flight Rules Area


Supervisor of Flying

Seaplane Base

Strategic Expeditionary Landing Field

Spectrometric Oil Analysis Program

prior permission required

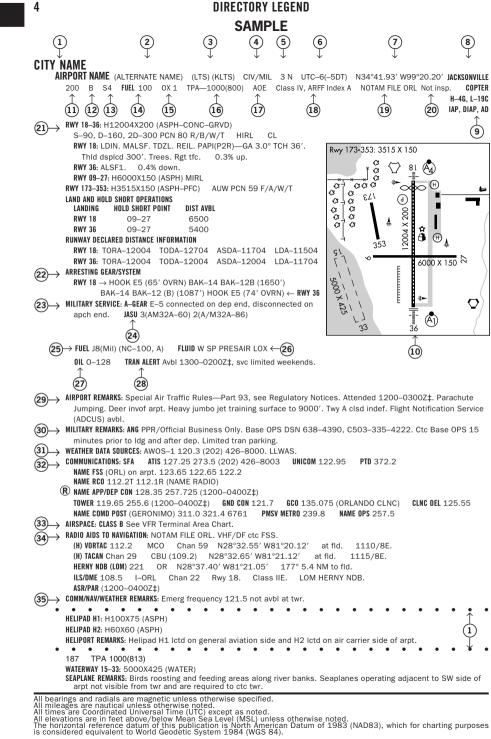

(10) SKETC	h legend
RUNWAYS/LANDING AREAS	radio aids to navigation
Hard Surfaced	VORTAC
Metal Surface	VOR/DME NDB
Sod, Gravel, etc.	TACAN NDB/DME
Light Plane,	MISCELLANEOUS AERONAUTICAL FEATURES
Closed	Airport Beacon
Helicopter Landings Area	Wind Cone
Displaced Threshold 0	Tetrahedron
Taxiway, Apron and Stopways	
	APPROACH LIGHTING SYSTEMS
MISCELLANEOUS BASE AND CULTURAL FEATURES	A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g. (A) Negative symbology, e.g.,
Buildings	vindicates Pilot Controlled Lighting (PCL).
Power Lines	Runway Centerline Lighting
Fence	Approach Lighting System ALSF-2
Towers	Approach Lighting System ALSF-1
Tanks	Short Approach Lighting System SALS/SALSF Simplified Short Approach Lighting System (SSALR) with RAIL
Oil Well	Medium Intensity Approach Lighting System (MALS and MALSF)/(SSALS
Smoke Stack	(A ₄) and SSALF)
Obstruction	System (MALSR) and RAIL
Controlling Obstruction	Lighting System (ODALS)
မြောင္းမွာ Trees	Air Force Overrun
Populated Places	Standard Threshold Clearance provided Pulsating Visual Approach Slope Indicator
Cuts and Fills Fill TITTITE	(PVASI) Visual Approach Slope Indicator with a threshold crossing height to accomodate long bodied or jumbo aircraft
Cliffs and Depressions	Tri-color Visual Approach Slope Indicator (TRCV)
Ditch	(TRCV) (§) Approach Path Alignment Panel (APAP)
Hill	P Precision Approach Path Indicator (PAPI)

LEGEND

This directory is a listing of data on record with the FAA on all open to the public airports, military facilities and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach

United States, Puerto Rico and the Virgin Islands. Joint civil/military and civil airports are listed alphabetically by state, associated city and airport name and cross-referenced by airport name. Military facilities are listed alphabetically by state and official airport name and cross-referenced by associated city name. Navaids, flight service stations and remote communication outlets that are associated with an airport, but with a different name, are listed alphabetically under their own name, as well

Procedure has been published in the U.S. Terminal Procedures Publication. Additionally this listing contains data for associated terminal control facilities, air route traffic control centers, and radio aids to navigation within the conterminous

as under the airport with which they are associated.

The listing of an open to the public airport in this directory merely indicates the airport operator's willingness to accommodate transient aircraft, and does not represent that the facility conforms with any Federal or local standards, or that it has been approved for use on the part of the general public. Military and private use facilities published in this directory are open to civil pilots only in an emergency or with prior permission. See Special Notice Section, Civil Use of Military Fields.

The information on obstructions is taken from reports submitted to the FAA. Obstruction data has not been verified in all

cases. Pilots are cautioned that objects not indicated in this tabulation (or on the airports sketches and/or charts) may exist which can create a hazard to flight operation. Detailed specifics concerning services and facilities tabulated within this directory are contained in the Aeronautical Information Manual, Basic Flight Information and ATC Procedures. The legend items that follow explain in detail the contents of this Directory and are keyed to the circled numbers on the

sample on the preceding pages. (1) CITY/AIRPORT NAME

same associated city name will be listed alphabetically by airport name and will be separated by a dashed rule line. A solid rule line will separate all others. FAA approved helipads and seaplane landing areas associated with a land airport will be

separated by a dotted line. Military airports are listed alphabetically by state and official airport name.

Civil and joint civil/military airports and facilities in this directory are listed alphabetically by state and associated city. Where the city name is different from the airport name the city name will appear on the line above the airport name. Airports with the

Alternate names, if any, will be shown in parentheses.

(3) LOCATION IDENTIFIER

The location identifier is a three or four character FAA code followed by a four-character ICAO code assigned to airports. ICAO codes will only be published at joint civil/military, and military facilities. If two different military codes are assigned, both

differentiate them from the letter "O".

(4) OPERATING AGENCY Airports within this directory are classified into two categories, Military/Federal Government and Civil airports open to the general public, plus selected private use airports. The operating agency is shown for military, private use and joint civil/military airports. The operating agency is shown by an abbreviation as listed below. When an organization is a tenant,

codes will be shown with the primary operating agency's code listed first. These identifiers are used by ATC in lieu of the airport name in flight plans, flight strips and other written records and computer operations. Zeros will appear with a slash to

the abbreviation is enclosed in parenthesis. No classification indicates the airport is open to the general public with no military tenant. US Army MC Marine Corps Α AFRC Air Force Reserve Command N Navv ΑF US Air Force NAF Naval Air Facility

ANG Air National Guard NAS Naval Air Station AR US Army Reserve NASA National Air and Space Administration ARNG US Army National Guard US Civil Airport Wherein Permit Covers CG US Coast Guard Use by Transient Military Aircraft CIV/MIL PVT Joint Use Civil/Military Private Use Only (Closed to the Public)

Department of National Defense Canada

(5) AIRPORT LOCATION

Airport location is expressed as distance and direction from the center of the associated city in nautical miles and cardinal points, e.g., 4 NE.

(6) TIME CONVERSION

DND

Hours of operation of all facilities are expressed in Coordinated Universal Time (UTC) and shown as "Z" time. The directory

indicates the number of hours to be subtracted from UTC to obtain local standard time and local daylight saying time UTC-5(-4DT). The symbol ‡ indicates that during periods of Daylight Saving Time effective hours will be one hour earlier than shown. In those areas where daylight saving time is not observed the (-4DT) and ‡ will not be shown. Daylight saving time is in

effect from 0200 local time the second Sunday in March to 0200 local time the first Sunday in November. Canada and all U.S. Conterminous States observe daylight saving time except Arizona and Puerto Rico, and the Virgin Islands. If the state observes daylight saving time and the operating times are other than daylight saving times, the operating hours will include

the dates, times and no ‡ symbol will be shown, i.e., April 15-Aug 31 0630-1700Z, Sep 1-Apr 14 0600-1700Z.

GEOGRAPHIC POSITION OF AIRPORT—AIRPORT REFERENCE POINT (ARP)

Positions are shown as hemisphere, degrees, minutes and hundredths of a minute and represent the approximate geometric center of all usable runway surfaces.

and airport name. (10) AIRPORT SKETCH

(11) ELEVATION

(13)

80

100

115

Α

A+

A1 +

10011

(14) FUEL CODE

sketches will be added incrementally.

(12) ROTATING LIGHT BEACON

SERVICING—CIVIL S1: Minor airframe repairs.

FUFI

40°C.

47° C.

minus 47°C.

FP** minus 50° C.

(8) CHARTS Charts refer to the Sectional Chart and Low and High Altitude Enroute Chart and panel on which the airport or facility is

(9) INSTRUMENT APPROACH PROCEDURES, AIRPORT DIAGRAMS

AIRPORT REMARKS or MILITARY REMARKS segment of the airport entry.

S2: Minor airframe and minor powerplant repairs.

S3: Major airframe and minor powerplant repairs.

S4: Major airframe and major powerplant repairs.

Grade 80 gasoline (Red)

specification) (Purple)

Grade 100 gasoline (Green)

100LL gasoline (low lead) (Blue)

Grade 115 gasoline (115/145 military

Jet A, Kerosene, without FS-II*, FP** minus

Jet A, Kerosene, with FS-II*, FP** minus

Jet A-1, Kerosene, without FS-II*, FP**

Jet A-1, Kerosene with FS-II*, FP** minus

Jet B, Wide-cut, turbine fuel without FS-II*,

IAP indicates an airport for which a prescribed (Public Use) FAA Instrument Approach Procedure has been published. DIAP

Manual 5-4-5 Instrument Approach Procedure Charts for additional information, AD indicates an airport for which an airport

Procedures. See the Special Notice Section of this directory, Civil Use of Military Fields and the Aeronautical Information

indicates an airport for which a prescribed DoD Instrument Approach Procedure has been published in the U.S. Terminal

depicted as GOMW and GOMC.

diagram has been published. Airport diagrams are located in the back of each A/FD volume alphabetically by associated city

The airport sketch, when provided, depicts the airport and related topographical information as seen from the air and should be used in conjunction with the text. It is intended as a guide for pilots in VFR conditions. Symbology that is not self-explanatory will be reflected in the sketch legend. The airport sketch will be oriented with True North at the top. Airport

The highest point of an airport's usable runways measured in feet from mean sea level. When elevation is sea level it will be

B indicates rotating beacon is available. Rotating beacons operate sunset to sunrise unless otherwise indicated in the

CODE

J4 (JP4)

J5 (JP5)

J8 (JP8)

18+100

MOGAS

B+

located. Helicopter Chart locations will be indicated as COPTER. IFR Gulf of Mexico West and IFR Gulf of Mexico Central will be

indicated as "00". When elevation is below sea level a minus "-" sign will precede the figure.

Data shown on fuel availability represents the most recent information the publisher has been able to acquire.

however, the grade/type and other octane rating will not be published.

Because of a variety of factors, the fuel listed may not always be obtainable by transient civil pilots. Confirmation of

*(Fuel System Icing Inhibitor) **(Freeze Point) NOTE:

availability of fuel should be made directly with fuel suppliers at locations where refueling is planned. (15) OXYGEN—CIVIL OX 1 High Pressure

OX 2 Low Pressure (16) TRAFFIC PATTERN ALTITUDE

OX 4 Low Pressure—Replacement Bottles

above airport elevation. Multiple TPA shall be shown as "TPA-See Remarks" and detailed information shall be shown in the

Traffic Pattern Altitude (TPA)—The first figure shown is TPA above mean sea level. The second figure in parentheses is TPA

Airport or Military Remarks Section. Traffic pattern data for USAF bases, USN facilities, and U.S. Army airports (including those on which ACC or U.S. Army is a tenant) that deviate from standard pattern altitudes shall be shown in Military Remarks.

NW. 23 SEP 2010 to 18 NOV 2010

OX 3 High Pressure—Replacement Bottles

Certain automobile gasoline may be used in specific aircraft engines if a FAA supplemental type certificate has been obtained. Automobile gasoline, which is to be used in aircraft engines, will be identified as "MOGAS",

S5: Major airframe repairs.

S7: Major powerplant repairs.

S8: Minor powerplant repairs.

FUFL

(JP-4 military specification) FP** minus (JP-5 military specification) Kerosene with

S6: Minor airframe and major powerplant repairs.

Jet B, Wide-cut, turbine fuel with FS-II*, FP**

FS-11, FP** minus 46°C.

minus 50° C.

(JP-8 military specification) Jet A-1, Kerosene with FS-II*, FP** minus 47°C.

(JP-8 military specification) Jet A-1, Kerosene

with FS-II*, FP** minus 47°C, with-fuel

additive package that improves thermo

stability characteristics of JP-8.

(Jet Fuel Type Unknown) Automobile gasoline which is to be used

as aircraft fuel.

(17) AIRPORT OF ENTRY, LANDING RIGHTS, AND CUSTOMS USER FEE AIRPORTS U.S. CUSTOMS USER FEE AIRPORT-Private Aircraft operators are frequently required to pay the costs associated with

customs processing.

AOE—Airport of Entry. A customs Airport of Entry where permission from U.S. Customs is not required to land. However, at

8

least one hour advance notice of arrival is required.

LRA—Landing Rights Airport. Application for permission to land must be submitted in advance to U.S. Customs. At least one

hour advance notice of arrival is required. NOTE: Advance notice of arrival at both an AOE and LRA airport may be included in the flight plan when filed in Canada or

Agriculture Department requirements in the International Flight Information Manual for further details.) US Customs Air and Sea Ports, Inspectors and Agents

Central Sector (Interior of the US, including Gulf states—MS, AL, LA)

Type of Air Carrier Operation

Aircraft Length

≥126'. <159'

≥126', <159'

≥159', <200'

≥159'. <200'

_____ >200'

≥200′

<126'

<90'

≥90′.

Scheduled Air Carrier Aircraft with 31 or more passenger seats Unscheduled Air Carrier Aircraft with 31 or more passengers seats

Scheduled Air Carrier Aircraft with 10 to 30 passenger seats

Southwest East Sector (OK and eastern TX)

Pacific Sector (WA, OR, CA, HI and AK)

Required

Νo.

Vehicles

1

1 or 2

2 or 3

3

3

contact airport manager prior to flight.

(19) NOTAM SERVICE

Airport

Index

C

D

Ε

will always carry an Index A.

Southwest West Sector (Western TX, NM and AZ)

(18) CERTIFICATED AIRPORT (14 CFR PART 139)

Mexico, Where Flight Notification Service (ADCUS) is available the airport remark will indicate this service. This notice will also be treated as an application for permission to land in the case of an LRA. Although advance notice of arrival may be relayed to

Airports serving Department of Transportation certified carriers and certified under 14 CFR part 139 are indicated by the Class and the ARFF Index; e.g. Class I, ARFF Index A, which relates to the availability of crash, fire, rescue equipment. Class I airports can have an ARFF Index A through E, depending on the aircraft length and scheduled departures. Class II, III, and IV

> 14 CFR PART 139 CERTIFICATED AIRPORTS AIRPORT CLASSIFICATIONS

14 CFR-PART 139 CERTIFICATED AIRPORTS INDICES AND AIRCRAFT RESCUE AND FIRE FIGHTING EQUIPMENT REQUIREMENTS

Scheduled

Departures

≥1

≥5

<5

≥5

<5

<5

≥5

NOTE: The listing of ARFF index does not necessarily assure coverage for non-air carrier operations or at other than prescribed times for air carrier. ARFF Index Ltd.-indicates ARFF coverage may or may not be available, for information

All public use landing areas are provided NOTAM "D" (distant dissemination) and NOTAM "L" (local dissemination) service. Airport NOTAM file identifier is shown for individual airports, e.g. "NOTAM FILE IAD". See AIM, Basic Flight Information and

NW. 23 SEP 2010 to 18 NOV 2010

> Greater Than; < Less Than; ≥ Equal or Greater Than; ≤ Equal or Less Than; H₂0-Water; DC-Dry Chemical.

for ensuring that Customs receives the notification. (See Customs, Immigration and Naturalization, Public Health and

407-975-1760

407-975-1840

407-975-1820

407-975-1800

Class II

Χ

Χ

Class III

Χ

Class IV

Х

Northeast Sector (New England and Atlantic States-ME to MD) 407-975-1740 Southeast Sector (Atlantic States-DC, WV, VA to FL) 407-975-1780

Class I

Χ

Agent + Water for Foam 500#DC or HALON 1211

or 450#DC + 100 gal H₂O

Index A + 1500 gal H₂O

Index A + 3000 gal H₂O

Index A + 4000 gal H₂O

Index A + 6000 gal H₂O

Customs through Mexico, Canada, and U.S. Communications facilities by flight plan, the aircraft operator is solely responsible

ATC Procedures for detailed description of NOTAM's, Current NOTAMs are available from Flight Service Stations at 1-800-WX-BRIEF. Real time Military NOTAMs are available using the DoD Internet NOTAM Distribution System (DINS) www.notams.ics.mil.

(20) FAA INSPECTION

All airports not inspected by FAA will be identified by the note: Not insp. This indicates that the airport information has been

provided by the owner or operator of the field.

(21) RUNWAY DATA

Runway information is shown on two lines. That information common to the entire runway is shown on the first line while information concerning the runway ends is shown on the second or following line. Runway direction, surface, length, width, weight bearing capacity, lighting, and slope, when available are shown for each runway. Multiple runways are shown with the longest runway first. Direction, length, width, and lighting are shown for sea-lanes. The full dimensions of helipads are shown.

e.g., 50X150. Runway data that requires clarification will be placed in the remarks section.

RUNWAY DESIGNATION

Runways are normally numbered in relation to their magnetic orientation rounded off to the nearest 10 degrees. Parallel runways can be designated L (left)/R (right)/C (center). Runways may be designated as Ultralight or assault strips. Assault strips are shown by magnetic bearing.

RIINWAY DIMENSIONS

Runway length and width are shown in feet. Length shown is runway end to end including displaced thresholds, but

excluding those areas designed as overruns. RUNWAY SURFACE AND LENGTH

asphalt-concrete). If the runway length is not prefixed, the surface is sod, clay, etc. The runway surface composition is

Runway lengths prefixed by the letter "H" indicate that the runways are hard surfaced (concrete, asphalt, or part

indicated in parentheses after runway length as follows:

(GRVL)-Gravel, or cinders

(MATS)—Pierced steel planking.

landing mats, membranes

RUNWAY WEIGHT BEARING CAPACITY

NEW DESCRIPTION

landing gear (KC10).

gear (B52).

landing gear (C5).

(PSP)-Pierced steel plank

(TURF)—Turf

Single wheel type landing gear (DC3), (C47), (F15), etc.

Two single wheels in tandem type landing gear (C130).

Two dual wheels in tandem type landing gear (B757,

Two dual wheels in tandem/dual wheel body gear type

Two dual wheels in tandem/two dual wheels in double tandem body gear type landing gear (B747, E4).

Complex dual wheel and quadruple wheel combination

Two dual wheels in tandem/two dual wheels in tandem body

Three dual wheels in tandem type landing gear (B777), etc.

Dual wheel gear two struts per side main gear type landing

Two triple wheels in tandem type landing gear (C17), etc.

Two dual wheels in tandem type landing gear (B707), etc.

Dual wheel type landing gear (P3, C9).

gear type landing gear (A340-600).

Dual wheel type landing gear (BE1900), (B737), (A319), etc.

(TRTD)-Treated

(WC)-Wire combed

(RFSC)-Rubberized friction seal coat

(PEM)—Part concrete, part asphalt

(PFC)-Porous friction courses

Runway strength data shown in this publication is derived from available information and is a realistic estimate of capability at

an average level of activity. It is not intended as a maximum allowable weight or as an operating limitation. Many airport

pavements are capable of supporting limited operations with gross weights in excess of the published figures. Permissible

operating weights, insofar as runway strengths are concerned, are a matter of agreement between the owner and user. When

desiring to operate into any airport at weights in excess of those published in the publication, users should contact the airport

NEW

S

D

2.5

2T

2D

2D

2D/D1

2D/2D1

2D/2D2

3D

D2

management for permission. Runway strength figures are shown in thousand of pounds, with the last three figures being

(AFSC)—Aggregate friction seal coat

(ASPH)—Asphalt

(DIRT)-Dirt

(CONC)—Concrete

(GRVD)-Grooved

omitted. Add 000 to figure following S, D, 2S, 2T, AUW, SWL, etc., for gross weight capacity. A blank space following the letter designator is used to indicate the runway can sustain aircraft with this type landing gear, although definite runway weight bearing capacity figures are not available, e.g., S, D. Applicable codes for typical gear configurations with S=Single, D=Dual,

T=Triple and Q=Quadruple: CURRENT S D

Т

ST

TRT DT

TT SBTT

None

TTT TT TDT

DDT

NW. 23 SEP 2010 to 18 NOV 2010

and Single Isolated Wheel Loading). PSI-Pounds per square inch. PSI is the actual figure expressing maximum pounds per square inch runway will support, e.g., (SWL 000/PSI 535).

AUW—All up weight. Maximum weight bearing capacity for any aircraft irrespective of landing gear configuration. SWL—Single Wheel Loading. (This includes information submitted in terms of Equivalent Single Wheel Loading (ESWL)

Omission of weight bearing capacity indicates information unknown.

The ACN/PCN System is the ICAO standard method of reporting pavement strength for pavements with bearing strengths greater than 12,500 pounds. The Pavement Classification Number (PCN) is established by an engineering assessment of the runway. The PCN is for use in conjunction with an Aircraft Classification Number (ACN). Consult the Aircraft Flight Manual, Flight Information Handbook, or other appropriate source for ACN tables or charts. Currently, ACN data may not be available

for all aircraft. If an ACN table or chart is available, the ACN can be calculated by taking into account the aircraft weight, the pavement type, and the subgrade category. For runways that have been evaluated under the ACN/PCN system, the PCN will be shown as a five-part code (e.g. PCN 80 R/B/W/T). Details of the coded format are as follows: (1) The PCN NUMBER—The reported PCN indicates that an

aircraft with an ACN equal or less than the reported PCN

can operate on the pavement subject to any limitation on

- the tire pressure. (2) The type of pavement:
- R Rigid F - Flexible (3) The pavement subgrade category:
- A High
- - B Medium
 - C Low D — Ultra-low

NOTE: Prior permission from the airport controlling authority is required when the ACN of the aircraft exceeds the published PCN or aircraft tire pressure exceeds the published limits. RUNWAY LIGHTING

- airport remarks or military service. Temporary, emergency or limited runway edge lighting such as flares, smudge pots, lanterns or portable runway lights will also be shown in airport remarks or military service. Types of lighting are shown with the runway or runway end they serve.
- NSTD-Light system fails to meet FAA standards. LIRL-Low Intensity Runway Lights.
- MIRL-Medium Intensity Runway Lights. HIRL—High Intensity Runway Lights.
- RAIL—Runway Alignment Indicator Lights.
- REIL—Runway End Identifier Lights.
- CL-Centerline Lights.
- TDZL-Touchdown Zone Lights.
- ODALS-Omni Directional Approach Lighting System.
- AF OVRN-Air Force Overrun 1000' Standard

which they are tenants.

- Approach Lighting System.
- LDIN-Lead-In Lighting System.
- MALS-Medium Intensity Approach Lighting System.
- Sequenced Flashing Lights.
- MALSR-Medium Intensity Approach Lighting System with
- Runway Alignment Indicator Lights.
- NOTE: Civil ALSF2 may be operated as SSALR during favorable weather conditions. When runway edge lights are positioned
- more than 10 feet from the edge of the usable runway surface a remark will be added in the "Remarks" portion of the airport
- MALSF-Medium Intensity Approach Lighting System with

Lights are in operation sunset to sunrise. Lighting available by prior arrangement only or operating part of the night and/or pilot controlled lighting with specific operating hours are indicated under airport or military remarks. At USN/USMC facilities lights are available only during airport hours of operation. Since obstructions are usually lighted, obstruction lighting is not included in this code. Unlighted obstructions on or surrounding an airport will be noted in airport or military remarks. Runway lights nonstandard (NSTD) are systems for which the light fixtures are not FAA approved L-800 series: color, intensity, or spacing does not meet FAA standards. Nonstandard runway lights, VASI, or any other system not listed below will be shown in

- ALSF1—High Intensity Approach Lighting System with Se-ALSF2-High Intensity Approach Lighting System with Se-
- - quenced Flashing Lights, Category II, Configuration. SF—Sequenced Flashing Lights. OLS—Optical Landing System.
 - WAVE-OFF.

entry. This is applicable to Air Force, Air National Guard and Air Force Reserve Bases, and those joint civil/military airfields on

SALS—Short Approach Lighting System.

Flashing Lights.

SALSF—Short Approach Lighting System with Sequenced

SSALS—Simplified Short Approach Lighting System.

Runway Alignment Indicator Lights.

ALSAF—High Intensity Approach Lighting System with

Sequenced Flashing Lights.

SSALF—Simplified Short Approach Lighting System with Sequenced Flashing Lights.

SSALR—Simplified Short Approach Lighting System with

quenced Flashing Lights, Category I, Configuration.

(4) The maximum tire pressure authorized for the pavement:

U — By experience of aircraft using the pavement

W - High, no limit

X — Medium, limited to 217 psi

Z - Very low, limited to 73 psi

Y - Low, limited to 145 psi

(5) Pavement evaluation method:

T — Technical evaluation

VISUAL GLIDESLOPE INDICATORS

P4R

PSIR

S2R

TRIR

V6I

V6R

V12

V16

Highest intensity available

Medium or lower intensity (Lower REIL or REIL-Off)

Lowest intensity available (Lower REIL or REIL-Off)

runwav

APAP on right side of runway

PVASI on right side of runway

TRCV on right side of runway

6-box VASI on left side of runway

6-box VASI on right side of runway

12-box VASI on both sides of runway

16-box VASI on both sides of runway

2-box SAVASI on right side of runway

4-identical light units placed on left side of

4-identical light units placed on right side of

APAP—A system of panels, which may or may not be lighted, used for alignment of approach path.

PNIR

PNIL APAP on left side of runway

TRCV—Tri-color visual approach slope indicator, normally a single light unit projecting three colors.

or down) on the runway end line, e.g., RWY 13: 0.3% up., RWY 21: Pole. Rgt tfc. 0.4% down.

Measured distance represents the available landing distance on the landing runway, in feet.

Aeronautical Information Manual contains specific details on hold-short operations and markings.

PAPI—Precision Approach Path Indicator

PVASI on left side of runway

TRCV on left side of runway

2-box VASI on left side of runway

2-box VASI on right side of runway

4-box VASI on left side of runway

4-box VASI on right side of runway

VASI-Visual Approach Slope Indicator

SAVASI—Simplified Abbreviated Visual Approach Slope Indicator

2-box SAVASI on left side of runway

P2R

S2L

TRII

V2L

V2R

V4L

V4R

Key Mike 7 times within 5 seconds

5 times within 5 seconds

3 times within 5 seconds

VASI Rwy 07-122.8.

take-off.

aeroplane landing.

(22) ARRESTING GEAR/SYSTEMS

and takeoff for specified runway end.

P4I P2L 2-identical light units placed on left side of 2-identical light units placed on right side of

PVASI—Pulsating/steady burning visual approach slope indicator, normally a single light unit projecting two colors.

NOTE: Approach slope angle and threshold crossing height will be shown when available; i.e., -GA 3.5° TCH 37'. PILOT CONTROL OF AIRPORT LIGHTING

Available systems will be indicated in the airport or military remarks, e.g., ACTIVATE HIRL Rwy 07-25, MALSR Rwy 07, and

Where the airport is not served by an instrument approach procedure and/or has an independent type system of different specification installed by the airport sponsor, descriptions of the type lights, method of control, and operating frequency will be explained in clear text. See AIM, "Basic Flight Information and ATC Procedures," for detailed description of pilot control of airport **RUNWAY SLOPE** When available, runway slope data will only be provided for those airports with an approved FAA instrument approach procedure. Runway slope will be shown only when it is 0.3 percent or greater. On runways less than 8000 feet, the direction of the slope up will be indicated, e.g., 0.3% up NW. On runways 8000 feet or greater, the slope will be shown (up

RUNWAY END DATA Information pertaining to the runway approach end such as approach lights, touchdown zone lights, runway end identification lights, visual glideslope indicators, displaced thresholds, controlling obstruction, and right hand traffic pattern, will be shown on the specific runway end. "Rgt tfc"-Right traffic indicates right turns should be made on landing

LAND AND HOLD SHORT OPERATIONS (LAHSO) LAHSO is an acronym for "Land and Hold Short Operations." These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway.

Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The

RUNWAY DECLARED DISTANCE INFORMATION TORA—Take-off Run Available. The length of runway declared available and suitable for the ground run of an aeroplane

Arresting gear is shown as it is located on the runway. The a-gear distance from the end of the appropriate runway (or into the overrun) is indicated in parentheses. A-Gear which has a bi-direction capability and can be utilized for emergency approach end engagement is indicated by a (B). The direction of engaging device is indicated by an arrow. Up to 15 minutes advance notice may be required for rigging A-Gear for approach and engagement. Airport listing may show availability of other than US Systems. This information is provided for emergency requirements only. Refer to current aircraft operating manuals for specific

TODA—Take-off Distance Available. The length of the take-off run available plus the length of the clearway, if provided. ASDA—Accelerate-Stop Distance Available. The length of the take-off run available plus the length of the stopway, if provided. LDA-Landing Distance Available. The length of runway which is declared available and suitable for the ground run of an

engagement weight and speed criteria based on aircraft structural restrictions and arresting system limitations. Following is a list of current systems referenced in this publication identified by both Air Force and Navy terminology:

BI-DIRECTIONAL CABLE (B) DESCRIPTION BAK-9 Rotary friction brake. Standard BAK-12 with 950 foot run out, 1-inch cable and 40,000 pound weight setting. Rotary

BAK-12A BAK-12B Extended BAK-12 with 1200 foot run, 11/4 inch Cable and 50,000 pounds weight setting. Rotary

12

E28

M21

BAK-14

friction brake. Rotary Hydraulic (Water Brake).

Rotary Hydraulic (Water Brake) Mobile. The following device is used in conjunction with some aircraft arresting systems:

> for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to five seconds to fully raise the cable.)

DIRECTORY LEGEND

A device that raises a hook cable out of a slot in the runway surface and is remotely positioned

A device that raises a hook cable out of a slot in the runway surface and is remotely positioned

for engagement by the tower on request. (In addition to personnel reaction time, the system

requires up to one and one-half seconds to fully raise the cable.)

UNI-DIRECTIONAL CABLE

TYPE DESCRIPTION

MB60 Textile brake—an emergency one-time use, modular braking system employing the tearing of

E5/E5-1/E5-3

specially woven textile straps to absorb the kinetic energy. Chain Type. At USN/USMC stations E-5 A-GEAR systems are rated, e.g., E-5 RATING-13R-1100

HW (DRY), 31L/R-1200 STD (WET). This rating is a function of the A-GEAR chain weight and

length and is used to determine the maximum aircraft engaging speed. A dry rating applies to a

stabilized surface (dry or wet) while a wet rating takes into account the amount (if any) of wet

overrun that is not capable of withstanding the aircraft weight. These ratings are published under

Military Service.

FOREIGN CABLE

DESCRIPTION US EQUIVALENT Rotary Hydraulic)

TYPE 44B-3H (Water Brake)

CHAG Chain F-5

UNI-DIRECTIONAL BARRIER

Web barrier between stanchions attached to a chain energy absorber.

TYPE MA-1A BAK-15

Web barrier between stanchions attached to an energy absorber (water squeezer, rotary friction, chain). Designed for wing engagement. NOTE: Landing short of the runway threshold on a runway with a BAK-15 in the underrun is a significant hazard. The barrier

in the down position still protrudes several inches above the underrun. Aircraft contact with the barrier short of the runway

threshold can cause damage to the barrier and substantial damage to the aircraft. OTHER

DESCRIPTION

TYPE

EMAS Engineered Material Arresting System, located beyond the departure end of the runway, consisting of

high energy absorbing materials which will crush under the weight of an aircraft.

(23) MILITARY SERVICE Specific military services available at the airport are listed under this general heading. Remarks applicable to any military service are shown in the individual service listing.

24) JET AIRCRAFT STARTING UNITS (JASU) The numeral preceding the type of unit indicates the number of units available. The absence of the numeral indicates ten

or more units available. If the number of units is unknown, the number one will be shown. Absence of JASU designation indicates non-availability.

The following is a list of current JASU systems referenced in this publication:

USAF JASU (For variations in technical data, refer to T.O. 35-1-7.)

ELECTRICAL STARTING UNITS: A/M32A-86 MC-1A MD-3 MD-3A

MD-3M

NW. 23 SEP 2010 to 18 NOV 2010

AC: 115/200v, 3 phase, 90 kva, 0.8 pf, 4 wire DC: 28v, 1500 amp, 72 kw (with TR pack)

DC: 28v, 500 amp, 14 kw

DC: 28v, 500 amp, 15 kw

DC: 28v, 1500 amp, 45 kw, split bus

DC: 28v, 1500 amp, 45 kw, split bus

AC: 115/208v, 400 cycle, 3 phase, 37.5 kva, 0.8 pf, 108 amp, 4 wire

AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire

AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire

AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire

13 DIRECTORY LEGEND MD-4 AC: 120/208v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 175 amp, "WYE" neutral ground, 4 wire, 120v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 303 amp, "DELTA" 3 wire, 120v, 400 cycle, 1 phase, 62.5 kva. 0.8 pf. 520 amp. 2 wire AIR STARTING UNITS AM32-95 150 + -5 lb/min (2055 + -68 cfm) at 51 + -2 psia AM32A-95 150 + -5 lb/min @ 49 + -2 psia (35 + -2 psig) LASS 150 +/- 5 lb/min @ 49 +/- 2 psia 82 lb/min (1123 cfm) at 130° air inlet temp, 45 psia (min) air outlet press MA-1A MC-1 15 cfm, 3500 psia MC-1A 15 cfm, 3500 psia MC-2A 15 cfm, 200 psia

COMBINED AIR AND ELECTRICAL STARTING UNITS: AM32A-60*

AM32A-60A

AM32A-60B*

USN JASU

NC-8A/A1

NC-10A/A1/B/C

WELLS AIR START

NCPP-105/RCPT

JASU (ARMY) 59B2-1B

OTHER JASU

CF12

CF13 CF14

CF15

CF16

CFA1

C - 26

E3

A4

MA-1

MA-2CARTRIDGE: MXU-4A

C-26-B, C-26-C

SYSTEM

AIR STARTING UNITS: GTC-85/GTE-85

MSU-200NAV/A/U47A-5

COMBINED AIR AND ELECTRICAL STARTING UNITS:

COMBINED AIR AND ELECTRICAL STARTING UNITS (DND)

ELECTRICAL STARTING UNITS (DND):

ELECTRICAL STARTING UNITS (OTHER)

AIR STARTING UNITS (DND):

AIR STARTING UNITS (OTHER):

30 kva.

electrical power available.

ELECTRICAL STARTING UNITS:

MC-11

AC: 115/200v, 400 cycle, 3 phase, 30 kw gen

DC: 28v, 700 amp AIR: 60 lb/min @ 40 psig @ sea level

AIR: 120 + - 4 lb/min (1644 + - 55 cfm) at 49 + - 2 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire, 120v, 1 phase, 25 kva DC: 28v, 500 amp, 15 kw AIR: 150 + -5 lb/min (2055 + -68 cfm at 51 + - psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire DC: 28v, 200 amp, 5.6 kw

AIR: 130 lb/min, 50 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire DC: 28v. 200 amp. 5.6 kw

120 lbs/min @ 45 psi.

28v, 7.5 kw, 280 amp.

ASA 45.5 psig, 116.4 lb/min

AIR 112.5 lb/min, 47 psig

150 Air HP, 115 lb/min 50 psia

250 Air HP, 150 lb/min 75 psia

DC 28v/10kw

USAF

204 lbs/min @ 56 psia.

8,000 cu in cap, 4000 psig, 15 cfm

DC: 500 amp constant, 750 amp intermittent, 28v; AC: 60 kva @ .8 pf, 115/200v, 3 phase, 400 Hz. DC: 750 amp constant, 1000 amp intermittent, 28v;

AC: 90 kva, 115/200v, 3 phase, 400 Hz.

AC 115/200v, 140 kva, 400 Hz, 3 phase AC 115/200v, 60 kva, 400 Hz, 3 phase

AC/DC 115/200v, 140 kva, 400 Hz, 3 phase, 28vDC, 1500 amp

DC 22-35v, 500 amp continuous 1100 amp intermittent DC 22-35v, 500 amp continuous 1100 amp intermittent soft start

AC 120/208v, 60 kva, 400 Hz, 3 phase DC 28v, 75 amp

28v 45kw 115-200v 15kw 380-800 Hz 1 phase 2 wire

40 psi/2 lb/sec (LPAS Mk12, Mk12L, Mk12A, Mk1, Mk2B)

NW. 23 SEP 2010 to 18 NOV 2010

28v 45kw: Split Bus: 115-200v 15kw 380-800 Hz 1 phase 2 wire

*NOTE: During combined air and electrical loads, the pneumatic circuitry takes preference and will limit the amount of

180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. Simultaneous multiple start capability. 180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. 700 amp, 28v DC. 120/208v, 400 Hz AC,

Military fuel should be used first if it is available. When military fuel cannot be obtained but Into-Plane contract fuel is

Form 1897 (Avgas) and AF Form 1245 (Avgas) are used at military installations only. The US Government Aviation Into-Plane Reimbursement (AIR) Card (currently issued by AVCARD) is the instrument to be used to obtain fuel under a DESC Into-Plane Contract and for NC purchases if the refueling agent at the commercial airport accepts the AVCARD. A current list of contract fuel locations is available online at www.desc.dla.mil/Static/ProductsAndServices.asp; click on the Commercial Airports

(25) FUEL—MILITARY

14

De-Ice

UXACEN. LPOX

HPOX

Fuel available through US Military Base supply, DESC Into-Plane Contracts and/or reciprocal agreement is listed first and is followed by (Mil). At commercial airports where Into-Plane contracts are in place, the name of the refueling agent is shown.

available, Government aircraft must refuel with the contract fuel and applicable refueling agent to avoid any breach in contract terms and conditions. Fuel not available through the above is shown preceded by NC (no contract). When fuel is obtained from NC sources, local purchase procedures must be followed. The US Military Aircraft Identaplates DD Form 1896 (Jet Fuel), DD

SP Air Compressors rated 3,000 PSI or more. PRESAIR Anti-icing/De-icing/Defrosting Fluid (MIL-A-8243).

(26) SUPPORTING FLUIDS AND SYSTEMS—MILITARY

See legend item 14 for fuel code and description.

CODE

ADI Anti-Detonation Injection Fluid-Reciprocating Engine Aircraft.

Single Point Refueling.

WΔI

W Water Thrust Augmentation-Jet Aircraft. Water-Alcohol Injection Type, Thrust Augmentation-Jet Aircraft.

LHOX Low and high pressure oxygen servicing. Liquid oxygen servicing. LOX **OXRB** Oxygen replacement bottles. (Maintained primarily at Naval stations for use in acft where oxygen can be

replenished only by replacement of cylinders.) ΩX

Low pressure oxygen servicing.

High pressure oxygen servicing.

Indicates oxygen servicing when type of servicing is unknown.

NOTE: Combinations of above items is used to indicate complete oxygen servicing available:

LHOXRB Low and high pressure oxygen servicing and replacement bottles:

Low pressure oxygen replacement bottles only, etc. **LPOXRB**

NOTE: Aircraft will be serviced with oxygen procured under military specifications only. Aircraft will not be serviced with medical oxygen.

NITROGEN: LPNIT - Low pressure nitrogen servicing.

HPNIT — High pressure nitrogen servicing. LHNIT - Low and high pressure nitrogen servicing.

(27) OIL—MILITARY



US AVIATION OILS (MIL SPECS):

CODE GRADE, TYPE

1065, Reciprocating Engine Oil (MIL-L-6082) 0 - 113

1100, Reciprocating Engine Oil (MIL-L-6082) 0 - 117

0-117+ 1100, 0-117 plus cyclohexanone (MIL-L-6082)

0 - 123

1065, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type III)

0 - 128

1100, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type II)

0 - 132

1005, Jet Engine Oil (MIL-L-6081)

0 - 1331010, Jet Engine Oil (MIL-L-6081)

0 - 147None, MIL-L-6085A Lubricating Oil, Instrument, Synthetic

0 - 148None, MIL-L-7808 (Synthetic Base) Turbine Engine Oil

0 - 149None, Aircraft Turbine Engine Synthetic, 7.5c St

0 - 155None, MIL-L-6086C, Aircraft, Medium Grade 0 - 156None, MIL-L-23699 (Synthetic Base), Turboprop and Turboshaft Engines JOAP/SOAP Joint Oil Analysis Program. JOAP support is furnished during normal duty hours, other times on request.

(JOAP and SOAP programs provide essentially the same service, JOAP is now the standard joint service supported program.)

(28) TRANSIENT ALERT (TRAN ALERT)—MILITARY Tran Alert service is considered to include all services required for normal aircraft turn-around, e.g., servicing (fuel, oil,



oxygen, etc.), debriefing to determine requirements for maintenance, minor maintenance, inspection and parking

assistance of transient aircraft. Drag chute repack, specialized maintenance, or extensive repairs will be provided within the capabilities and priorities of the base. Delays can be anticipated after normal duty hours/holidays/weekends

operated exclusively by US military, the servicing indicated by the remarks will not always be available for US military

regardless of the hours of transient maintenance operation. Pilots should not expect aircraft to be serviced for TURN-AROUNDS during time periods when servicing or maintenance manpower is not available. In the case of airports not aircraft. When transient alert services are not shown, facilities are unknown. NO PRIORITY BASIS—means that transient alert services will be provided only after all the requirements for mission/tactical assigned aircraft have been

(29) AIRPORT REMARKS

accomplished.

The Attendance Schedule is the months, days and hours the airport is actually attended. Airport attendance does not mean watchman duties or telephone accessibility, but rather an attendant or operator on duty to provide at least minimum services (e.g., repairs, fuel, transportation). Airport Remarks have been grouped in order of applicability. Airport remarks are limited to those items of information that are

determined essential for operational use, i.e., conditions of a permanent or indefinite nature and conditions that will remain in effect for more than 30 days concerning aeronautical facilities, services, maintenance available, procedures or hazards, knowledge of which is essential for safe and efficient operation of aircraft, Information concerning permanent closing of a runway or taxiway will not be shown. A note "See Special Notices" shall be applied within this remarks section when a special notice applicable to the entry is contained in the Special Notices section of this publication. Parachute Jumping indicates parachute jumping areas associated with the airport. See Parachute Jumping Area section of this publication for additional Information.

Landing Fee indicates landing charges for private or non-revenue producing aircraft. In addition, fees may be charged for

planes that remain over a couple of hours and buy no services, or at major airline terminals for all aircraft.

Note: Unless otherwise stated, remarks including runway ends refer to the runway's approach end.

(30) MILITARY REMARKS Military Remarks published at a joint Civil/Military facility are remarks that are applicable to the Military. At Military

Facilities all remarks will be published under the heading Military Remarks. Remarks contained in this section may not be applicable to civil users. The first group of remarks is applicable to the primary operator of the airport. Remarks applicable to a tenant on the airport are shown preceded by the tenant organization, i.e., (A) (AF) (N) (ANG), etc. Military airports operate 24 hours unless otherwise specified. Airport operating hours are listed first (airport operating hours will only be listed if they are different than the airport attended hours or if the attended hours are unavailable) followed by pertinent

remarks in order of applicability. Remarks will include information on restrictions, hazards, traffic pattern, noise abatement, customs/agriculture/immigration, and miscellaneous information applicable to the Military.

Type of restrictions: CLOSED: When designated closed, the airport is restricted from use by all aircraft unless stated otherwise. Any closure applying to specific type of aircraft or operation will be so stated. USN/USMC/USAF airports are considered closed during non-operating hours. Closed airports may be utilized during an emergency provided there is a safe landing area. OFFICIAL BUSINESS ONLY: The airfield is closed to all transient military aircraft for obtaining routine services such as

fueling, passenger drop off or pickup, practice approaches, parking, etc. The airfield may be used by aircrews and aircraft if official government business (including civilian) must be conducted on or near the airfield and prior permission is received from the airfield manager. AF OFFICIAL BUSINESS ONLY OR NAVY OFFICIAL BUSINESS ONLY: Indicates that the restriction applies only to service indicated

PRIOR PERMISSION REQUIRED (PPR): Airport is closed to transient aircraft unless approval for operation is obtained from the appropriate commander through Chief, Airfield Management or Airfield Operations Officer. Official Business or PPR does not preclude the use of US Military airports as an alternate for IFR flights. If a non-US military airport is used as a weather alternate and requires a PPR, the PPR must be requested and confirmed before the flight departs. The purpose of

PPR is to control volume and flow of traffic rather than to prohibit it. Prior permission is required for all aircraft requiring transient alert service outside the published transient alert duty hours. All aircraft carrying hazardous materials must

Note: OFFICIAL BUSINESS ONLY AND PPR restrictions are not applicable to Special Air Mission (SAM) or Special Air Resource (SPAR) aircraft providing person or persons on aboard are designated Code 6 or higher as explained in AFJMAN 11-213, AR 95-11, OPNAVINST 3722-8J. Official Business Only or PPR do not preclude the use of the airport as an alternate for IFR flights.

(31) WEATHER DATA SOURCES

Weather data sources will be listed alphabetically followed by their assigned frequencies and/or telephone number and hours of operation. ASOS—Automated Surface Observing System. Reports the same as an AWOS-3 plus precipitation identification and intensity,

and freezing rain occurrence (future enhancement). AWOS—Automated Weather Observing System

AWOS-A—reports altimeter setting (all other information is advisory only). AWOS-1—reports altimeter setting, wind data and usually temperature, dewpoint and density altitude.

obtain prior permission as outlined in AFJI 11-204, AR 95-27, OPNAVINST 3710.7.

AWOS-2—reports the same as AWOS-1 plus visibility.

AWOS-3—reports the same as AWOS-1 plus visibility and cloud/ceiling data. See AIM, Basic Flight Information and ATC Procedures for detailed description of AWOS.

LAWRS-Limited Aviation Weather Reporting Station where observers report cloud height, weather, obstructions to vision,

LLWAS—indicates a Low Level Wind Shear Alert System consisting of a center field and several field perimeter anemometers. SAWRS-identifies airports that have a Supplemental Aviation Weather Reporting Station available to pilots for current

is not the same as the airport name the call sign will be shown. Frequencies shall normally be shown in descending order with the primary frequency listed first. Frequencies will be listed, together with sectorization indicated by outbound radials,

Single Frequency Approach (SFA), Common Traffic Advisory Frequency (CTAF), Automatic Terminal Information Service (ATIS) and Aeronautical Advisory Stations (UNICOM) or (AUNICOM) along with their frequency is shown, where available, on the line following the heading "COMMUNICATIONS." When the CTAF and UNICOM frequencies are the same, the frequency will

The FSS telephone nationwide is toll free 1-800-WX-BRIEF (1-800-992-7433). When the FSS is located on the field it will be indicated as "on arpt". Frequencies available at the FSS will follow in descending order. Remote Communications Outlet (RCO) providing service to the airport followed by the frequency and FSS RADIO name will be shown when available. FSS's provide information on airport conditions, radio aids and other facilities, and process flight plans. Airport Advisory Service (AAS) is provided on the CTAF by FSS's for select non-tower airports or airports where the tower is not in operation.

Aviation weather briefing service is provided by FSS specialists. Flight and weather briefing services are also available by

Remote Communications Outlet (RCO)-An unmanned air/ground communications facility that is remotely controlled and

Civil Communications Frequencies-Civil communications frequencies used in the FSS air/ground system are operated on

(See AIM, Para 4-1-9 Traffic Advisory Practices at Airports Without Operating Control Towers or AC 90-42C.)

a. 122.0 is assigned as the Enroute Flight Advisory Service frequency at selected FSS RADIO outlets.

16 HIWAS-See RADIO AIDS TO NAVIGATION

temperature and dewpoint (in most cases), surface wind, altimeter and pertinent remarks.

be indicated by a bold ASOS, AWOS, or HIWAS followed by the frequency, identifier and phone number, if available.

SWSL—Supplemental Weather Service Location providing current local weather information via radio and telephone. TDWR—indicates airports that have Terminal Doppler Weather Radar. WSP-indicates airports that have Weather System Processor.

When the automated weather source is broadcast over an associated airport NAVAID frequency (see NAVAID line), it shall

Airport terminal control facilities and radio communications associated with the airport shall be shown. When the call sign

be shown as CTAF/UNICOM 122.8.

calling the telephone numbers listed.

weather information.

(32) COMMUNICATIONS

and hours of operation. Communications will be listed in sequence as follows:

b. 122.2 is assigned as a common enroute frequency. c. 123.6 is assigned as the airport advisory frequency at select non-tower locations. At airports with a tower, FSS may provide airport advisories on the tower frequency when tower is closed. d. 122.1 is the primary receive-only frequency at VOR's. e. Some FSS's are assigned 50 kHz frequencies in the 122-126 MHz band (eg. 122.45). Pilots using the FSS A/G

122.0, 122.2, 123.6; emergency 121.5; plus receive-only on 122.1.

system should refer to this directory or appropriate charts to determine frequencies available at the FSS or remoted

facility through which they wish to communicate.

Emergency frequency 121.5 and 243.0 are available at all Flight Service Stations, most Towers, Approach Control and RADAR facilities. Frequencies published followed by the letter "T" or "R", indicate that the facility will only transmit or receive respectively on

that frequency. All radio aids to navigation (NAVAID) frequencies are transmit only. TERMINAL SERVICES

SFA—Single Frequency Approach.

CTAF-A program designed to get all vehicles and aircraft at airports without an operating control tower on a common

D-ATIS—Digital ATIS provides ATIS information in text form outside the standard reception range of conventional ATIS via landline & data link communications and voice message within range of existing transmitters.

provides UHF or VHF communications capability to extend the service range of an FSS.

ATIS—A continuous broadcast of recorded non-control information in selected terminal areas.

AUNICOM—Automated UNICOM is a computerized, command response system that provides automated weather, radio check capability and airport advisory information selected from an automated menu by microphone clicks.

UNICOM—A non-government air/ground radio communications facility which may provide airport information. PTD-Pilot to Dispatcher.

APP CON—Approach Control. The symbol (\mathbf{R}) indicates radar approach control.

GCA-Ground Control Approach System.

TOWER-Control tower.

GND CON-Ground Control.

GCO-Ground Communication Outlet-An unstaffed, remotely controlled, ground/ground communications facility. Pilots at uncontrolled airports may contact ATC and FSS via VHF to a telephone connection to obtain an instrument clearance or close a

VFR or IFR flight plan. They may also get an updated weather briefing prior to takeoff. Pilots will use four "key clicks" on the

DEP CON—Departure Control. The symbol (R) indicates radar departure control. CLNC DEL-Clearance Delivery. PRE TAXLCI NC-Pre taxi clearance

VFR ADVSY SVC-VFR Advisory Service. Service provided by Non-Radar Approach Control.

Advisory Service for VFR aircraft (upon a workload basis) ctc APP CON.

COMD POST—Command Post followed by the operator call sign in parenthesis.

PMSV-Pilot-to-Metro Service call sign, frequency and hours of operation, when full service is other than continuous.

PMSV installations at which weather observation service is available shall be indicated, following the frequency and/or

hours of operation as "Wx obsn svc 1900-0000Z‡" or "other times" may be used when no specific time is given. PMSV

facilities manned by forecasters are considered "Full Service". PMSV facilities manned by weather observers are listed as

"Limited Service". OPS—Operations followed by the operator call sign in parenthesis.

CON RANGE

FLT FLW-Flight Following

MEDIVAC

NOTE: Communication frequencies followed by the letter "X" indicate frequency available on request.

(33) AIRSPACE

Information concerning Class B, C, and part-time D and E surface area airspace shall be published with effective times. Class D and E surface area airspace that is continuous as established by Rulemaking Docket will not be shown.

CLASS B-Radar Sequencing and Separation Service for all aircraft in CLASS B airspace.

CLASS C—Separation between IFR and VFR aircraft and sequencing of VFR arrivals to the primary airport.

TRSA—Radar Sequencing and Separation Service for participating VFR Aircraft within a Terminal Radar Service Area.

Class C, D, and E airspace described in this publication is that airspace usually consisting of a 5 NM radius core surface

area that begins at the surface and extends upward to an altitude above the airport elevation (charted in MSL for Class C

and Class D). Class E surface airspace normally extends from the surface up to but not including the overlying controlled

airspace.

When part-time Class C or Class D airspace defaults to Class E, the core surface area becomes Class E. This will be formatted as:

AIRSPACE: CLASS C svc "times" ctc APP CON other times CLASS E:

AIRSPACE: CLASS D svc "times" other times CLASS E. When a part-time Class C, Class D or Class E surface area defaults to Class G, the core surface area becomes Class G up

to, but not including, the overlying controlled airspace. Normally, the overlying controlled airspace is Class E airspace beginning at either 700' or 1200' AGL. This will be formatted as:

AIRSPACE: CLASS C svc "times" ctc APP CON other times CLASS G, with CLASS E 700' (or 1200') AGL & abv:

AIRSPACE: CLASS D svc "times" other times CLASS G with CLASS E 700' (or 1200') AGL & abv:

AIRSPACE: CLASS E svc "times" other times CLASS G with CLASS E 700' (or 1200') AGL & abv.

NOTE: AIRSPACE SVC "TIMES" INCLUDE ALL ASSOCIATED ARRIVAL EXTENSIONS. Surface area arrival extensions for instrument approach

procedures become part of the primary core surface area. These extensions may be either Class D or Class E airspace and

are effective concurrent with the times of the primary core surface area. For example, when a part-time Class C, Class D or

Class E surface area defaults to Class G, the associated arrival extensions will default to Class G at the same time. When

a part-time Class C or Class D surface area defaults to Class E, the arrival extensions will remain in effect as Class E

NOTE: CLASS E AIRSPACE EXTENDING UPWARD FROM 700 FEET OR MORE ABOVE THE SURFACE. DESIGNATED IN CONJUNCTION WITH AN AIRPORT WITH AN APPROVED INSTRUMENT PROCEDURE.

Class E 700' AGL (shown as magenta vignette on sectional charts) and 1200' AGL (blue vignette) areas are designated

when necessary to provide controlled airspace for transitioning to/from the terminal and enroute environments. Unless otherwise specified, these 700'/1200' AGL Class E airspace areas remain in effect continuously, regardless of airport

operating hours or surface area status. These transition areas should not be confused with surface areas or arrival

extensions.

(See Chapter 3, AIRSPACE, in the Aeronautical Information Manual for further details)

NW. 23 SEP 2010 to 18 NOV 2010

(34) RADIO AIDS TO NAVIGATION

Class Frequency

SSV Class

18

NAVAID information is tabulated as indicated in the following sample:

Terminal Procedures. Only part-time hours of operation will be shown.

Identifier

TACAN/DME Channel

The Airport/Facility Directory lists, by facility name, all Radio Aids to Navigation that appear on National Aeronautical Navigation Services Visual or IFR Aeronautical Charts and those upon which the FAA has approved an Instrument Approach

this publication. All VOR, VORTAC, TACAN, ILS and MLS equipment in the National Airspace System has an automatic monitoring and shutdown feature in the event of malfunction. Unmonitored, as used in this publication, for any navigational aid, means that monitoring personnel cannot observe the malfunction or shutdown signal. The NAVAID NOTAM file identifier will be shown as "NOTAM FILE IAD" and will be listed on the Radio Aids to Navigation line. When two or more NAVAIDS are listed and the NOTAM file identifier is different from that shown on the Radio Aids to Navigation line, it will be shown with the

Procedure, with exception of selected TACANs. Military TACAN information will be published for Military facilities contained in

NAVAID listing. NOTAM file identifiers for ILSs and its components (e.g., NDB (LOM) are the same as the associated airports and are not repeated. Automated Surface Observing System (ASOS), Automated Weather Observing System (AWOS), and Hazardous Inflight Weather Advisory Service (HIWAS) will be shown when this service is broadcast over selected NAVAIDs.

Geographical Position

Bearing and distance Magnetic

facility to center of

Variation

Site Elevation

Distance

ABE Chan 122(Y) N40°43.60′ W75°27.30′ 180°4.1 NM to fld. 1110/8E, AWOS, HIWAS.

Automated Hazardous Inflight Weather Advisory Service

Observing System VOR unusable 020°-060° byd 26 NM blo 3,500′

Weather

Restriction within the normal altitude/range of the navigational aid (See primary alphabetical listing for restrictions on VORTAC and VOR/DME). Note: Those DME channel numbers with a (Y) suffix require TACAN to be placed in the "Y" mode to receive distance

airport

information HIWAS—Hazardous Inflight Weather Advisory Service is a continuous broadcast of inflight weather advisories including

summarized SIGMETs, convective SIGMETs, AIRMETs and urgent PIREPs. HIWAS is presently broadcast over selected VOR's ASR/PAR—Indicates that Surveillance (ASR) or Precision (PAR) radar instrument approach minimums are published in the U.S.

RADIO CLASS DESIGNATIONS

VOR/DME/TACAN Standard Service Volume (SSV) Classifications Altitudes

		(NM)
(T) Terminal	1000' to 12,000'	25
(L) Low Altitude	1000' to 18,000'	40
(H) High Altitude	1000' to 14,500'	40
	14,500' to 18,000'	100
	18,000' to 45,000'	130
	45,000' to 60,000'	100
NOTE: Additionally, (H) fac	ilities provide (L) and (T) service volume and (L) fac	ilities provide (T) service. Altitud

aditionally, (H) facilities provide (L) and (T) service volume and (L) facilities provide (T) service. Altitudes are with respect to the station's site elevation. Coverage is not available in a cone of airspace directly above the facility. CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

The term VOR is, operationally, a general term covering the VHF omnidirectional bearing type of facility without regard to the

fact that the power, the frequency protected service volume, the equipment configuration, and operational requirements may vary between facilities at different locations. Automatic Weather Broadcast. Direction Finding Service. UHF standard (TACAN compatible) distance measuring equipment. DMF DME(Y) ______ UHF standard (TACAN compatible) distance measuring equipment that require TACAN to be placed in the "Y" mode to receive DME. Glide slope. _____ Non-directional radio beacon (homing), power 50 watts to less than 2,000 watts (50 NM at all altitudes). нн _____ Non-directional radio beacon (homing), power 2,000 watts or more (75 NM at all altitudes). H-SAB ______ Non-directional radio beacons providing automatic transcribed weather service. ILS ______ Instrument Landing System (voice, where available, on localizer channel). ISMLS _____ Interim Standard Microwave Landing System. Localizer Directional Aid Compass locator station when installed at middle marker site (15 NM at all altitudes). LOM _____ Compass locator station when installed at outer marker site (15 NM at all altitudes). MH _____ Non-directional radio beacon (homing) power less than 50 watts (25 NM at all altitudes). Microwave Landing System. Middle marker. Outer marker Simultaneous range homing signal and/or voice. SABH _____ Non-directional radio beacon not authorized for IFR or ATC. Provides automatic weather broadcasts. Simplified Direction Facility. TACAN ______ UHF navigational facility-omnidirectional course and distance information. VHF navigational facility-omnidirectional course only. VOR ___ VOR/DME _____ Collocated VOR navigational facility and UHF standard distance measuring equipment.

Collocated VOR and TACAN navigational facilities. Without voice on radio facility frequency. VHF station location marker at a LF radio facility.

VORTAC _____

ILS information is tabulated as indicated in the following sample:

CHANNEL

18X

20X

22X

24X

26X

28X

30X

32X

34X

36X

38X

4∩x

42X

44X

46X

48X

50X

52X

54X

56X

17Y

18Y

25Y

26Y

27Y

28Y

291

540

NI S

CHANNEL

500

502

504

506

508

510

512

514

516

518

520

522

524

526

528

530

532

534

536

538

540

542

544

556

558

560

562

564

11X

11Y

12X

12Y

17X

17V

19X

VHE

FREQUENCY

108.10

108.30

108.50

108.70

108.90

109.10

109.30

109.50

109.70

109.90

110.10

110.30

110 50

110.70

110.90

111.10

111.30

111.50

111.70

111.90

108.05

108.15

108 85

108 95

109.05

109 15

109 25

135.4

135 45

135.5

135.55

108.00

108 05

108.20

Official Category: I, II, or III; the lowest minima on published or unpublished procedures supported by the ILS.

ILS FACILITY PEFORMANCE CLASSIFICATION CODES

Farthest point of satisfactory Category III Localizer performance for Category I, II, or III approaches: A - 4 NM prior to runway threshold, B - 3500 ft prior to runway threshold, C - glide angle dependent but generally 750-1000 ft prior to

Codes define the ability of an ILS to support autoland operations. The two portions of the code represent Official Category

and farthest point along a Category I, II, or III approach that the Localizer meets Category III structure tolerances.

threshold, T - runway threshold, D - 3000 ft after runway threshold, and E - 2000 ft prior to stop end of runway.

CHANNEL

568

570

572

574

576

578

580

582

584

586

588

590

592

594

596

598

600

602

604

606

608

610

II S/DMF Rwy 18. Class IIE. 108 5 I_ORI Chan 22 LOM HERNY NDR

> ILS Facility Performance Classification Code

FREQUENCY PAIRING PLAN AND MLS CHANNELING TACAN NI S VHE TACAN FREQUENCY

109 45

109.55

109.65

109.75

109.85

109.95

110.05

110.15

110.25

110.35

110.45

110.55

110.65

110.75

110.85

110.95

111.05

111.15

111.25

111.35

111.45

111.55

113 55

113 65

113.75

113.85

113 95

108.35

108 40

108.45

108.50

108.55

108 60

108.75

2 IM

CHANNEL

636

638

640

642

644

646

648

650

652

654

656

658

660

662

664

666

668

670

672

674

676

678

692

694

696

698

26X

26Y

27X

27Y

28X

28Y

29X

29Y

30X

CHANNEL

31 V

32Y

33Y

34Y

35Y

36Y

37Y

38Y

39Y

40Y

41Y

42Y

43Y

44Y

45Y

46Y

47Y

48Y

49Y

50Y

51Y

52Y

82Y

83Y

84Y

85Y

86Y

546

548

504

550

554

VHF

FREQUENCY

114 15

114.25

114.35

114.45

114.55

114.65

114.75

114.85

114.95

115.05

115.15

115.25

115 35

115.45

115.55

115.65

115.75

115.85

115.95

116.05

116.15

116.25

116.35

116.45

116.55

116 65

116 75

116.85

116.95

117 05

117.15

117.25

VHF

FREQUENCY

108.80

108.85

108.90

108 95

109 00

109.05

109.10

109.15

109.20

109 25

109.30

TACAN

CHANNEL

88Y

89Y

90Y

91Y

92Y

93Y

94Y

95Y

96Y

97Y 98Y

aay

1009

101Y

102Y

103Y

104Y

105Y

106Y

107Y

108Y

109Y

110Y

111Y

112Y

113Y

114Y

115Y

116Y

117Y

118Y

119Y

2 IM

CHANNEL

556

508

558

560

510

562

564

512

544	108.25	19Y	612	111.65	53Y	680
546	108.35	20Y	614	111.75	54Y	682
548	108.45	21Y	616	111.85	55Y	684
550	108.55	22Y	618	111.95	56Y	686
552	108.65	23Y	620	113.35	80Y	688
554	108.75	24Y	622	113.45	81Y	690

624

626

628

630

632 566 109.35 30Y 634 114.05 87Y

FREQUENCY PAIRING PLAN AND MLS CHANNELING

The following is a list of paired VOR/ILS VHF frequencies with TACAN channels and MLS channels.

TACAN VHF 2 IM TACAN VHF MLS

TACAN

FREGUENCY CHANNEL CHANNEL FREGUENCY CHANNEL CHANNEL

CHANNEL

544

2X 134.5 19Y 108.25 25X 21 134 55 20X 108 30 502 25Y 20Y

21 X

21Y

22X

22Y

23X

24Y

111	100.00	340	23/	100.00	_	
18X	108.10	500	23Y	108.65	552	
18Y	108.15	542	24X	108.70	506	

VHF

FREQUENCY

133.60

133.65

133.70

133.75

133.80

133.85

133.90

133.95

134 00

134 05

134 10

134 15

134.20

134.25

112.30

112.35

112 40

112.45

112 50

112 55

112.60

112.65

112.70

112.75

112.80

112.85

112.90

112.95

113.00

113.05

113.10

113.15

113.20

113.25

113.30

113.35

113.40

113.45

113.50

620

622

TACAN

CHANNEL

63X

63Y

64X

64Y

65X

65Y

66X

66Y

67X

67Y

68X

68Y

69X

69Y

70X

70Y

71X

71Y

72X

72Y

73X

73Y

74X

74Y

75X

75Y

76X

76Y

77X

77Y

78X

78Y

79X

79Y

80X

80Y

81X

81Y

82X

TACAN

CHANNEL

30Y

31X

31Y

32X

32Y

33X

33Y

34X

34Y

35X

35Y

36X

36Y

37X

37Y

38X

38Y

39X

397

40X

40Y

41X

41Y

42X

42Y

43X

43Y

44X

44Y

45X

45Y

46X

46Y

47X

47Y

48X

48Y

49X

49Y

VHF

FREQUENCY

109.35

109.40

109.45

109.50

109.55

109.60

109.65

109.70

109.75

109.80

109.85

109.90

109.95

110.00

110.05

110.10

110.15

110.20

110 25

110 30

110.35

110.40

110.45

110.50

110.55

110.60

110.65

110.70

110.75

110.80

110.85

110.90

110.95

111.00

111.05

111.10

111.15

111.20

111.25

MIS

CHANNEL

566

568

514

570

572

516

574

576

518

578

580

520

582

584

522

586

588

524

590

592

526

594

596

528

598

600

530

602

604

TACAN

CHANNEL

95Y

96X

961

97X

97Y

98X

98Y

99X

99Y

100X

100Y

101X

101Y

102X

102Y

103X

103Y

104X

104Y

105X

105Y

106X

106Y

107X

107Y

108X

108Y

109X

109Y

110X

110Y

111X

111Y

112X

112Y

113X

113Y

114X

114Y

VHF

FREQUENCY

114.85

114.90

114.95

115.00

115.05

115.10

115.15

115.20

115.25

115.30

115.35

115.40

115.45

115.50

115.55

115.60

115.65

115.70

115 75

115.80

115.85

115.90

115.95

116.00

116.05

116.10

116.15

116.20

116.25

116.30

116.35

116.40

116.45

116.50

116.55

116.60

116.65

116.70

116.75

MLS

CHANNEL

650

652

654

656

658

-

660

662

664

666

668

670

672

674

676

678

680

682

684

686

688

MIS

CHANNEL

431	111.20	004	02/	113.50	_	1141	110.75	000
50X	111.30	532	82Y	113.55	624	115X	116.80	-
50Y	111.35	606	83X	113.60	-	115Y	116.85	690
51X	111.40	-	83Y	113.65	626	116X	116.90	-
51Y	111.45	608	84X	113.70	-	116Y	116.95	692
52X	111.50	534	84Y	113.75	628	117X	117.00	-
52Y	111.55	610	85X	113.80	-	117Y	117.05	694
53X	111.60	-	85Y	113.85	630	118X	117.10	-
53Y	111.65	612	86X	113.90	-	118Y	117.15	696
54X	111.70	536	86Y	113.95	632	119X	117.20	-
54Y	111.75	614	87X	114.00	-	119Y	117.25	698
55X	111.80	-	87Y	114.05	634	120X	117.30	-
55Y	111.85	616	88X	114.10	-	120Y	117.35	-
56X	111.90	538	88Y	114.15	636	121X	117.40	-
56Y	111.95	618	89X	114.20	-	121Y	117.45	-
57X	112.00	-	89Y	114.25	638	122X	117.50	-
57Y	112.05	-	90X	114.30	-	122Y	117.55	-
58X	112.10	-	90Y	114.35	640	123X	117.60	-
58Y	112.15	-	91X	114.40	-	123Y	117.65	-
59X	112.20	-	91Y	114.45	642	124X	117.70	-
59Y	112.25	-	92X	114.50	-	124Y	117.75	-
60X	133.30	-	92Y	114.55	644	125X	117.80	-
60Y	133.35	-	93X	114.60	-	125Y	117.85	-
61X	133.40	-	93Y	114.65	646	126X	117.90	-
61Y	133.45	-	94X	114.70	-	126Y	117.95	-
62X	133.50	-	94Y	114.75	648			
62Y	133.55	-	95X	114.80	-			

(35) COMM/NAV/WEATHER REMARKS:
These remarks consist of pertinent information affecting the current status of communications, NAVAIDs and weather.

AGGET N44°40.56′ W124°03.92′. NOTAM FILE ONP.

158° 5.8 NM to Newport Muni. Unusable 360°-150°.

ALBANY MUNI 3 E UTC-8(-7DT) (S12) N44°38.27′ W123°03.57′

FUEL 100LL OX 3 NOTAM FILE MMV

RWY 16-34: H3004X75 (ASPH) S-30, D-43, 2D-71

RWY 16: VASI(V4L)-GA 4.0° TCH 29', Road.

RWY 34: REIL. VASI(V2L)-GA 4.0° TCH 25'. Tree.

AIRPORT REMARKS: Attended 1600-0100Z±. Two marked by reflectors. ACTIVATE VASI Rwv 16-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

NDB (LOM) 350 ON

(R) CASCADE APP/DEP CON 127.5 (1400-0730Z±)

SEATTLE CENTER APP/DEP CON 125.8 (0730-1400Z±)

RADIO AIDS TO NAVIGATION: NOTAM FILE CVO.

CORVALLIS (H) VORW/DME 115.4 CVO Chan 101 N44°29 98' W123°17.62′ 032° 13 NM to fld. 241/18E.

3004 X 7 Œ ଔ Ċ

ALKALI LAKE STATE (RØ3) 8 N UTC-8(-7DT) N43°05.24' W119°58.56' KLAMATH FALLS

SEATTLE

SEATTLE

L-1B IAP

TPA-5312(1000) NOTAM FILE MMV

RWY 18-36: 6100X150 (GRVL) **COMMUNICATIONS: CTAF 122.9**

AIRPORT REMARKS: Unattended. Livestock frequently on rwy. Windsock midfield west side.

ARLINGTON MUNI (188) 1 NE UTC-8(-7DT) N45°42.99' W120°10.07'

290

NOTAM FILE MMV

RWY 06-24: 5000X50 (DIRT)

RWY 24: Rgt tfc.

AIRPORT REMARKS: Unattended. Rwy 06-24 loose gravel on surface, center portion grvl, surface rough due to bunch grass growth.

COMMUNICATIONS: CTAF 122.9

ASHLAND MUNI-SUMNER PARKER FLD (SØ3) 2 E UTC-8(-7DT)

N42°11.42′ W122°39.64′

1885 B S4 FUEL 100LL. JET A OX 2 TPA-2900(1015) NOTAM FILE MMV

RWY 12-30: H3603X75 (ASPH) S-15 MIRI

RWY 12: VASI(V2L)-GA 3.75° TCH 37'. Trees.

RWY 30: REIL. VASI(V2L)-GA 4.0° TCH 22'. Thid dspicd 190'.

Trees

AIRPORT REMARKS: Attended Oct-Apr Mon-Sat 1600-0100Z‡, May-Sep Mon-Sat 1600-0200Z‡, Sun 1700-0100Z‡. 24 hr credit card

fuel. Deer and birds on and invof arpt. ACTIVATE MIRL Rwy 12-30, and REIL Rwy 30-CTAF. VASI Rwy 12 and Rwy 30 opr 24 hrs.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE MFR.

ROGUE VALLEY (H) VORTACW 113.6 OED Chan 83 N42°28.77'

W122°54.78' 128° 20.7 NM to fld. 2083/19E. 2AWIH

SEATTLE

KLAMATH FALLS

L-21

€3 a ⟨3

43

ASTORIA RGNL (AST) 3 SW UTC-8(-7DT) N46°09.48' W123°52.72' R S3 FUEL 100LL, JET A Class IV, ARFF Index A NOTAM FILE AST

H-1R I-1C

SEATTLE

SEATTLE

IAP

H-1B, L-1B

ΙΔΡ

RWY 08-26: H5796X100 (ASPH) S-60, D-76, 2S-97, 2D-119

RWY 08: REIL. VASI(V4L)-GA 3.0° TCH 51'. Thid dspicd 301'. Tree. RWY 26: MALSR, Thid dsplcd 704', Dike. RWY 13-31: H4996X100 (ASPH) S-60, D-76, 2S-97, 2D-119

RWY 13: REIL, VASI(V4L)-GA 3.0°TCH 54', Berm.

RWY 31: PAPI(P4L)-GA 4.0° TCH 45', Trees.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 08: TORA-5796 TODA-5796 ASDA-5196 LDA-4896 RWY 13: TORA-4467 TODA-4467 ASDA-4467 LDA-4467

RWY 26-TORA-5796 TODA-6096 ASDA-5496 LDA-4782 RWY 31. TORA-4467 TODA-4467 ASDA-4467 IDA-4467 AIRPORT REMARKS: Attended 1600-0100Z‡. For fuel outside normal

working hours ctc fixed-base operator 503-861-1222. Migratory flocks of waterfowl on and in vicinity of arpt. High concentration helicopter operations in area. ACTIVATE MIRL Rwy 08-26 and Rwy 13-31. MALSR Rwy 26 and REIL Rwy 08-CTAF.

WEATHER DATA SOURCES: ASOS 135.375 (503) 861-1371. HIWAS 114.0

COMMUNICATIONS: CTAF/UNICOM 122.8 RCO 122.3 (Mc MINNVILLE RADIO)

SEATTLE CENTER APP/DEP CON 124.2

RADIO AIDS TO NAVIGATION: NOTAM FILE AST.

at fld. 10/19E. (L) VORW/DME 114.0 AST Chan 87 N46°09.70' W123°52.82'

VOR portion unusable:

019°-030° beyond 35 NM below 5500' 180°-210° beyond 10 NM below 3300'

030°-045° beyond 30 NM below 5500' 045°-055° beyond 30 NM below 7500' 080°-100° beyond 34 NM below 6000'

120°-150° beyond 33 NM below 7000' 150°-170° beyond 36 NM below 7000'

170°-200° beyond 15 NM below 8000'

330°-360° beyond 28 NM below 6,300' N46°08.37′ W123°35.24′ 255° 12.2 NM to fld. NDB unmonitored.

DME unusable:

ILS 109.5

075°-088° beyond 35 NM below 7,000' PEN KARPEN NDB (MHW) 201

I-AST

AURORA STATE (UAO) 1 NW UTC-8(-7DT) N45°14.83′ W122°46.20′ S4

Rwy 26.

FUEL 100LL, JET A OX 1 TPA-1200(1000) NOTAM FILE UAO

Class IE.

RWY 17-35: H5004X100 (ASPH-GRVD) S-30, D-45 RWY 17: ODALS, VASI(V4R)-GA 3.5° TCH 40', Trees.

RWY 35: VASI(V4L)-GA 3.0° TCH 40'. Tree.

AIRPORT REMARKS: Attended 1500-0500Z‡, Rwv 17 +30' p-line 2100' from thid, marked by balls. Parallel twy 35' wide and has medium ints twy lgts. Rwy 17-35 has 150' blast pad at south end. Rwy 35 calm wind rwy. Use only paved sfcs. Exercise caution, frequent straight-in instrument apch tfc to Rwy 17. ACTIVATE MIRL Rwy

17-35, VASI Rwy 17 and Rwy 35 and ODALS Rwy 17-CTAF.


WEATHER DATA SOURCES: ASOS 118.525 (503) 678-3011. COMMUNICATIONS: CTAF/UNICOM 122.7

(R) PORTLAND APP/DEP CON 126.0 **CLNC DEL** 119.95

RADIO AIDS TO NAVIGATION: NOTAM FILE MMV.

NEWBERG (H) VORW/DME 117.4 UBG Chan 121 N45°21.19' W122°58.69' 105° 10.9 NM to fld. 1440/21E. HIWAS.

ILS/DME 111.15 I-UAO Chan 48(Y) Rwv 17. Loc only. DME unusable byd 15.2 NM blo 2500'.



180°-240° beyond 5 NM below 2000'

200°-210° beyond 20 NM below 8,000'

210°-240° beyond 30 NM below 6,000'

240°-320° beyond 12 NM below 2,000'

240°-320° beyond 25 NM below 5,000'

320°-330° beyond 30 NM below 5,500' 330°-360° beyond 20 NM below 5,500'

€3

Orchard 43

NW. 23 SEP 2010 to 18 NOV 2010

BAKER CITY MUNI (BKE) 3 N UTC-8(-7DT) N44°50.24′ W117°48.55′ B S2 FUEL 100LL, JET A NOTAM FILE BKE 3373

S-30

RWY 13-31: H5095X100 (ASPH) S-50, D-65, 2S-82 MIRI

RWY 13: VASI(V4L)-GA 3.0°TCH 55'. Trees. RWY 31: Road.

RWY 35: Thid dspicd 397'. RWY 17: Trees.

RWY 17-35: H4359X75 (ASPH)

RWY 08-26: H3670X140 (ASPH) S-30

RWY 08: Road

RWY 26. P_line

AIRPORT REMARKS: Attended dalgt hrs. Birds invof arpt. Rwy 08-26 and

Rwy 17-35 no winter maintenance, CLOSED by snow. Rwy 08-26

has many large unsealed cracks, grass growing on rwy, standing

water on surface. Rwy 13-31 parallel twy marked with reflectors. ACTIVATE MIRL Rwv 13-31 and VASI Rwv 13-CTAF.

WEATHER DATA SOURCES: ASOS 134.275 (541) 523-5412.

COMMUNICATIONS: CTAF/UNICOM 123.0

SALT LAKE CENTER APP/DEP CON 128.05 AIRSPACE: CLASS E svc continuous.

RADIO AIDS TO NAVIGATION: NOTAM FILE BKE. (H) VORW/DME 115.3 BKE Chan 100

RWY 16-34: H3601X60 (ASPH)

W117°48.47′ at fld. 3380/20E. VOR/DME unusable:

005°-050° byd 30 NM blo 12,000' 110°-125° byd 15 NM blo 9,000'

110°-125° byd 30 NM blo 11,000′ 125°-180° byd 15

180°-200° byd 15 NM blo 12,000° 200°-230° byd 15 NM

BANDON STATE UTC-8(-7DT) (SØ5) 2 SE N43°05.19' W124°24.47' **S4** FUEL 100LL TPA-1122(1000) NOTAM FILE MMV S-12


N44°50.44′

RWY 16: REIL, PAPI(P4L) TCH 45', Trees. RWY 34: REIL, PAPI(P4L) TCH 40', Trees. AIRPORT REMARKS: Attended 1500-0200Z‡. Deer invof arpt. Twy marked with blue reflectors. PAPI Rwy 16 OTS indef. ACTIVATE MIRL Rwy 16-34, REIL Rwy 16 and Rwy 34 and PAPI Rwy 16 and Rwy 34-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8 RADIO AIDS TO NAVIGATION: NOTAM FILE OTH.

NORTH BEND (L) VORTACW 112.1 OTH Chan 58 N43°24.93'

W124°10.11' 190° 22.4 NM to fld. 707/18E. HIWAS.



SEATTLE

ΙΔΡ

H-1C I-13B

KLAMATH FALLS

265°-290° byd 15 NM blo 12,000' 265°-290° bvd 30 NM

L-1A ß **43 43** €3

BANKS N45°37.82′ W123°02.75′ NOTAM FILE HIO.

NDB (MHW) 356 PND 122° 6.7 NM to Portland-Hillsboro

BEAVER MARSH STATE (2S2)1 SW UTC-8(-7DT) N43°07.74' W121°49.07'

TPA-5638(1000) RWY 18-36: 4500X60 (DIRT) RWY 18: Trees. RWY 36: Trees.

AIRPORT REMARKS: Unattended. CLOSED winter months. Rwy 18-36 15' rwy width usable in center. Rwy 18-36 dirt

surface loose and powdery, creates clouds of dust, loose rocks on surface, rough.

COMMUNICATIONS: CTAF 122.9

BEAVER MOUNTAIN N44°35.21′ W117°47.26′

NOTAM FILE MMV

RCO 122.4 (MC MINNVILLE RADIO)

SFATTLE L-1C

KLAMATH FALLS

SEATTLE H-1C. L-13B BEND MUNI (BDN) 5 NE UTC-8(-7DT) N44°05.67′ W121°12.01′

3460 S2 **FUEL** 100LL, JET A OX 1, 3, 4 TPA—4460(1000) B NOTAM FILE MMV

RWY 16-34: H5200X75 (ASPH) S-30 MIRL 1.0% up SE

RWY 16: PAPI(P4L)-GA 3.0° TCH 39'. Road. RWY 34: PAPI(P4L)-GA 3.0° TCH 44'. Tree.

AIRPORT REMARKS: Attended Mon-Fri 1530-0200Z‡, Sat-Sun


1600-0100Z±, Glider opr on and invof arpt, Calm wind rwy is Rwy 16. Noise abatement procedures in effect, call FBO at

541-388-0019. Twy parallel to Rwy 16-34 marked by reflectors. ACTIVATE MIRL Rwy 16-34 and PAPI Rwy 16 and Rwy 34-CTAF. WEATHER DATA SOURCES: AWOS-3 134.425 (541) 382-1477. COMMUNICATIONS: CTAF/UNICOM 123.0

SEATTLE CENTER APP/DEP CON 128.15 RADIO AIDS TO NAVIGATION: NOTAM FILE RDM

DESCHUTES (H) VORTACW 117.6 DSD Chan 123 N44°15.17'

W121°18.21' 137° 10.5 NM to fld. 4101/18E. HIWAS.



KLAMATH FALLS

H-1B. L-13A

SEATTLE

KLAMATH FALLS

KLAMATH FALLS

L-13A

BOARDMAN (M5Ø) 4 SW UTC-8(-7DT) N45°48.89' W119°49.23' 396 NOTAM FILE MMV

RWY 04-22: H4200X100 (ASPH) S-30 RWY 22: Rgt tfc.


AIRPORT REMARKS: Unattended. Telephone avbl. ACTIVATE MIRL Rwy 04-22-122 9

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE PDT.

PENDLETON (H) VORTACW 114.7 PDT Chan 94

N45°41.91' W118°56.32' 261° 37.7 NM to fld. 1559/20E. HIWAS.



BODEY N44°18.48′ W121°01.14′ NOTAM FILE RDM NDB (HW/LOM) 411 RD 222° 6.5 NM to Roberts Fld.

NDB unusable 091°-111° byd 25 NM blo 14000'.

BROOKINGS N42°04.47′ W124°17.41′ (BOK) 1 NE UTC-8(-7DT)

В FUEL 100LL, JET A TPA-1459(1000) NOTAM FILE 4BK MIRI

RWY 12-30: H2900X60 (ASPH) S-11

RWY 12: PAPI(P2L)—GA 4.0° TCH 40'. Trees. Rgt tfc. RWY 30: PAPI(P2L)-GA 3.0° TCH 40'. Tree. AIRPORT REMARKS: Attended continuously. ACTIVATE MIRL Rwy 12-30 and PAPI Rwy 12 and Rwy 30-CTAF.

WEATHER DATA SOURCES: ASOS 132.025 (541) 412-8682.

COMMUNICATIONS: CTAF/UNICOM 122.8

NW. 23 SEP 2010 to 18 NOV 2010

BURNS MUNI (BNO) 5 E UTC-8(-7DT) N43°35.52′ W118°57.33′ S4 NOTAM FILE BNO 4148 B

FUEL 100LL, JET A S-30, D-50, 2D-90 RWY 12-30: H5100X75 (ASPH) RWY 12: REIL. VASI(V2L)-GA 3.0° TCH 45'.

RWY 30: REIL, VASI(V2L)-GA 3.0° TCH 45', Road. RWY 03-21: H4600X60 (CONC) S-30 MIRL

RWY 03: REIL, PAPI(P2L)—GA 3.0° TCH 40', Thid dspicd 600'. P-lines RWY 21: REIL. PAPI(P2L)-GA 3.0° TCH 40'.


AIRPORT REMARKS: Attended Mon-Sat 1600-0200Z‡. Self serve card lock fuel avbl 24 hrs. Flocks of large birds in vicinity of arpt Feb-May and Sep-Oct. Bottle oxygen obtainable-1/2 hr. Rwy 21 PAPI OTS indef. ACTIVATE MIRL Rwys 03-21 and 12-30, PAPI Rwys 03 and 21, VASI Rwys 12 and 30, and REIL Rwys 03, 21, 12

and 30—CTAF WEATHER DATA SOURCES: ASOS 135.575 (541) 573-1382. COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.5 (MC MINNVILLE RADIO)

AIRSPACE: CLASS E svc 1500-2300Z± other times CLASS G. RADIO AIDS TO NAVIGATION: NOTAM FILE BNO.

WILDHORSE (L) VORW/DME 113.8 II R Chan 85 N43°35.59' W118°57.30' at fld. 4140/18E.



KLAMATH FALLS

H-1C. L-11A

ΙΔΡ

CAPE BLANCO STATE (See DENMARK)

CASCADE LOCKS STATE UTC-8(-7DT) N45°40.62' W121°52.73' (CZK) 1 NE TPA-1151(1000) NOTAM FILE CZK

RWY 06-24: H1800X30 (ASPH) S_4

RWY No. Tree RWY 24: Road. Rgt tfc.

powerlines 3NM SW of arpt. COMMUNICATIONS: CTAF 122.9

CAVE HINCTION ILLINOIS VALLEY (3S4) 4 SW UTC-8(-7DT) N42°06.22′ W123°40.95′

B TPA-2394(1000) NOTAM FILE MMV RWY 18-36: H4807X75 (ASPH) S-20, D-30 RWY 18: VASI(V2L)-GA 4.0° TCH 50'. Thid dspicd 125'. Road.


RWY 36: VASI(V2L)-GA 4.5° TCH 49'. Trees. AIRPORT REMARKS: Unattended. Frequent ultra-light activity. Rwy 18 and Rwy 36 VASI out of svc indefinitely. Rwy 36 designated calm wind rwv. ACTIVATE LIRL Rwv 18-36, VASI Rwv 18 and Rwv

36—CTAF

COMMUNICATIONS: CTAF 122.9 RADIO AIDS TO NAVIGATION: NOTAM FILE CEC.

CRESCENT CITY (L) VORTACW 109.0 CEC

W124°14.44' 033° 31.7 NM to fld. 54/19E.



€3 **(3**

CHEHALEM AIRPARK (See NEWBERG)

Chan 27 N41°46.77'

CHILOQUIN STATE (2S7) 1 W UTC-8(-7DT)

N42°34.99′ W121°52.57′ TPA-5217(1000) NOTAM FILE MMV 4217 B

RWY 17-35: H3735X60 (ASPH) S-10 MIRI RWY 17: Thid dspicd 420'. Tree. RWY 35. Tree

AIRPORT REMARKS: Unattended. Irregular winter maintenance, arpt may be clsd due to snow. Downdraft area north of rwy. Numerous areas of longitudinal and transverse cracking throughout full length of rwy. Cracks 1/2-3 inches. Rwy 35 end cracking most severe. ACTIVATE MIRL Rwy 17-35-CTAF. COMMUNICATIONS: CTAF 122.9

Δx ୕ୢ୕ଌ **3 3** 3 63 N ¢ *(*3 (3 a €3 Arenc

KLAMATH FALLS

1-21


RADIO AIDS TO NAVIGATION: NOTAM FILE LMT. KLAMATH FALLS (H) VORTACW 115.9 LMT Chan 106 N42°09.19' W121°43.65' 329° 26.6 NM to fld. 4087/17E.

CHRISTMAS VALLEY (62S) 1 SE UTC-8(-7DT) N43°14.19' W120°39.97' KLAMATH FALLS B NOTAM FILE MMV H-1B, L-11A RWY 07-25: H5200X60 (ASPH) S-12 MIRL RWY 25: PAPI(P2L)-GA 3.0° TCH 38'. Building. RWY 07: Building. AIRPORT REMARKS: Unattended. UNICOM monitored irregularly. Rwy 07 thid Igtng obscured by vegetation. ACTIVATE MIRL Rwy 07-25 and PAPI Rwv 25-CTAF. COMMUNICATIONS: CTAF/UNICOM 122.8 RADIO AIDS TO NAVIGATION: NOTAM FILE LKV. LAKEVIEW (H) VORTACW 112.0 LKV Chan 57 W120°30.43' 332° 45.2 NM to fld. 7460/19E.

UTC-8(-7DT) N43°13.41' W122°25.25'

CLEARWATER TOKETEE STATE (3S6) 2 S

HIWAS.



220°-230° byd 20 NM blo 8,500′

230°-250° byd 15 NM blo 8,500'

250°-270° byd 20 NM blo 8,500'

NOTAM FILE MMV RWY 11-29: 5350X60 (DIRT)

RWY 11: Trees.

RWY 29: Trees.

AIRPORT REMARKS: Unattended. Arpt CLOSED from 1 Nov-1 May. Elk and deer on and invof arpt. Arpt on W side of

COMMUNICATIONS: CTAF 122.9

Cascades and affected by weather West. Best info on arpt thru US Forest svc Roseburg, or local fixed-base operator at Roseburg. Rwy 11-29 graded, 60' wide, shoulders rough and rutted. Rwy 11-29 has 120' trees

250' either side of centerline. Rwy 11-29 thlds outlined with white tires.

COLUMBIA N45°35.32′ W122°36.68′ NOTAM FILE PDX.

(H) TACAN Chan 29 CBU (109.2) at Portland Intl. 22/20E. TACAN unusable:

030°-050° byd 20 NM blo 9,500′ 155°-210° byd 20 NM blo 6,000'

210°-220° byd 20 NM blo 10,500' COLUMBIA GORGE RGNL/THE DALLES MUNI (See THE DALLES)

NW. 23 SEP 2010 to 18 NOV 2010

H-1B. L-1C

SEATTLE

KLAMATH FALLS

CONDON STATE PAULING FLD

(3S9)1 NE UTC-8(-7DT) N45°14.79' W120°09.99' TPA-3911(1000) NOTAM FILE MMV 2911 B RWY 07-25: H3500X60 (CONC) S-12 MIRL


RWY 07: REIL. PAPI(P4L)-GA 3.0° TCH 40'. Road. RWY 25: REIL. PAPI(P4L)-GA 3.0° TCH 40'. Ground.

AIRPORT REMARKS: Unattended. Heavy agricultural ops Feb-Jun. Tmpry tie-down area/gravel parking apron clsd, ACTIVATE MIRL Rwy

07-25, PAPI Rwy 07 and Rwy 25, and REIL Rwy 07 and Rwy 25—CTAF

COMMUNICATIONS: CTAF 122.9 RADIO AIDS TO NAVIGATION: NOTAM FILE DLS. KLICKITAT (H) VORW/DME 112.3 LTJ Chan 70 N45°42.81'

W121°06.05' 104° 48.4 NM to fld. 3220/21E.



SEATTLE

SEATTLE

I-13A

CORNELIUS SKYPORT

NOTAM FILE MMV

RAWIH

RWY 16-34: 2000X45 (TURF-GRVL)

RWY 16: Trees. Rgt tfc.

RWY 09-27: H3545X75 (ASPH)

(4S4) 3 N

RWY 34: Thid dspicd 200'. Road. AIRPORT REMARKS: Attended 1400-0400Z‡. Helicopter and Ultralight ops prohibited. Rwy 16-34 rwy ends marked

with half barrels. Rwy 34 dsplcd thld marked with "L" shaped boards. COMMUNICATIONS: CTAF 122.9

UTC-8(-7DT) N45°34.96' W123°03.17'

S-51, D-65, 2S-127, 2D-100

CORVALLIS MUNI (CVO) 4 SW UTC-8(-7DT) N44°29.83′ W123°17.37′ B S4 FUEL 100LL, JET A 0X 1, 2, 3 TPA-1050(800) NOTAM FILE CVO RWY 17-35: H5900X150 (ASPH) S-35, D-73, 2S-127, 2D-100 RWY 17: MALSR, VASI(V4L)-GA 3.0° TCH 50'.

RWY 35: REIL. VASI(V4L)-GA 3.0° TCH 51'.

MIRI RWY 27: PAPI(P4L)-GA 3.0° TCH 25'. Thid dsplcd 199'. Railroad. AIRPORT REMARKS: Attended 1600Z‡-dusk. Migratory waterfowl and

other birds on and in the vicinity of arpt. Heavy-lift helicopter activity on and invof arpt, be aware of possible rotor tip vortices. ACTIVATE MALSR Rwy 17 and MIRL Rwy 09-27 and REIL Rwy 35—CTAF

COMMUNICATIONS: CTAF/UNICOM 123.0 R CASCADE APP/DEP CON 127.5 (1400-0730Z‡)

(R) SEATTLE CENTER APP/DEP CON 125.8 (0730-1400Z‡)

RADIO AIDS TO NAVIGATION: NOTAM FILE CVO.

(H) VORW/DME 115.4 CVO Chan 101 N44°29.98′

W123°17.62' at fld. 241/18E.

LEWISBURG NDB (MHW) 225 LWG N44°36.82′ W123°16.24′

WEATHER DATA SOURCES: AWOS-3 135.775 (541) 754-0081.

169° 7.0 NM to fld. ILS 111.9 I-CVO Rwy 17. Class IT.

KLAMATH FALLS H-1B, L-1B IAP 150


COTTAGE GROVE STATE (61S) 1 E UTC-8(-7DT) N43°47.99' W123°01.74' B S4 FUEL 100LL TPA-1641(1000) NOTAM FILE MMV 641

RWY 15-33: H3188X60 (ASPH) S-15 MIRL RWY 15: PAPI(P4L)-GA 3.0° TCH 45'. Trees.

RWY 33: PAPI(P4R)-GA 4.2° TCH 45'. Tree. Rgt tfc. AIRPORT REMARKS: Attended Mon-Sat 1800-0300Z‡. If no attendant

on duty, phone number is posted on pump. Fuel avbl 24 hr self serve cardlock. High concentration of birds on and in vicinity of arpt. Deer on and in vicinity of arpt all hours. Twys 25' wide, marked with blue reflectors. Unicom unmonitored. PAPI Rwy 15 OTS indef. ACTIVATE MIRL Rwy 15-33 PAPI Rwy 15 and Rwy

RADIO AIDS TO NAVIGATION: NOTAM FILE EUG. EUGENE (H) VORTACW 112.9 EUG Chan 76 N44°07.25′ W123°13.37' 136° 21.0 NM to fld. 364/20E. HIWAS.



KLAMATH FALLS

I-1A

COUNTRY SQUIRE AIRPARK (See SANDY)

RWY 15: PAPI(P2L)-GA 3.0°. Tree.

CRESCENT LAKE STATE (5S₂) 2 NE

COMMUNICATIONS: CTAF/UNICOM 122.8

RWY 13-31: H3900X30 (ASPH)

TPA-5810(1000) NOTAM FILE MMV

RWY 13: Trees. RWY 31: Thid dsplcd 275'. Trees.

AIRPORT REMARKS: Unattended. Arpt CLOSED Nov 1-May 1 due to snow. Rwy surrounded by trees. Owner advises contact with State Department of Aviation 503-378-4880. Gravel occasionally on rwy due to runoff. COMMUNICATIONS: CTAF 122 9 RADIO AIDS TO NAVIGATION: NOTAM FILE RDM.

RWY 33. Trees

DESCHUTES (H) VORTACW 117.6 DSG

4101/18E. HIWAS.

4810

33-CTAF.


CRESWELL


HOBBY FLD (77S) 1 NE UTC-8(-7DT) N43°55.85' W123°00.40' S4 FUEL 100LL, JET A TPA-1403(865) NOTAM FILE MMV RWY 15-33: H3101X60 (ASPH) S-12 MIRL

AIRPORT REMARKS: Attended Mon-Fri 1700-0200Z±. Sat-Sun 1900-0000Z‡, Self serve fuel avbl 24 hrs. Parachute Jumping. Rwy 33 calm wind rwy. ACTIVATE MIRL Rwy 15-33 and PAPI Rwy

15—CTAF COMMUNICATIONS: CTAF/UNICOM 122.7 RADIO AIDS TO NAVIGATION: NOTAM FILE EUG.

EUGENE (H) VORTACW 112.9 EUG Chan 76 N44°07.25′ W123°13.37' 121° 14.8 NM to fld. 364/20E. HIWAS.





112 OREGON CIII VFR

(5S5)

RWY 16-34: H2500X32 (ASPH) RWY 16: Thid dspicd 660'. Tree. AIRPORT REMARKS: Unattended, Animals on and in vicinity of arot, Grass area south of rwy not for acft ops. Rwy

cans each side

RWY 14: Trees.

DAVIS

DENMARK

TPA-3695(1000)

LAKE BILLY CHINOOK STATE

16-34 has restricted rwy sight distance. Rwy 16 NSTD dsplcd thld marked with three orange reflective marker **COMMUNICATIONS: CTAF 122.9**

4 SW

NOTAM FILE MMV

(See GATES)

AIRPORT REMARKS: Unattended.

COMMUNICATIONS: CTAF 122.9

W124°14.44′

CAPE BLANCO STATE (5S6)

TPA-1214(1000)

RADIO AIDS TO NAVIGATION: NOTAM FILE CEC.

CRESCENT CITY (L) VORTACW 109.0 CEC

CAPE BLANCO RCO 122.4 (MC MINNVILLE RADIO)

NOTAM FILE MMV RWY 14-32: H5100X150 (ASPH) RWY 32: Brush.

S-115, D-185, 2D-340

330° 65.7 NM to fld. 54/19E.

Chan 27

N41°46 77'

UTC-8(-7DT) N42°51.47′ W124°31.06′

6 W UTC-8(-7DT) N44°31.16′ W121°19.24′

(3 3 3 €3 €3 €3 €3 43 C3 €3 a 63

> **4**3 *(*3 €3 **4**3 €3

SEATTLE

KLAMATH FALLS

43

€3

€3

H-1B, L-1A

€3

€3

€3

€3

43

KLAMATH FALLS

KLAMATH FALLS

L-1A

SFATTI F

L-13B

SEATTLE

H-1B, L-13A

(3 32 3

n 03 €3 ⟨3 43

DESCHUTES N44°15.17′ W121°18.21′ NOTAM FILE RDM. (H) VORTACW 117.6 DSD Chan 123 071° 6.6 NM to Roberts Fld. 4101/18E. HIWAS. VORTAC unusable: 220°-240° byd 30 NM

(See PENDLETON)

NOTAM FILE OTH.

046° 3.1 NM to Southwest Oregon Rgnl.

UTC-8(-7DT) N45°25.49' W117°15.89'

FIIFI 10011 TPA-4957(1000) NOTAM FILE MMV R RWY 12-30: H2850X50 (ASPH) S-7 LIRL AIRPORT REMARKS: Attended on call. For attendant call 541-426-3562. For fuel call 541-426-3288. No line of sight

RCO 122.5 (MC MINNVILLE RADIO)

EASTERN OREGON RGNL AT PENDLETON

Unusable 360°-165° bvd 10 NM ENTERPRISE N45°26.04' W117°16.23'

EMIRE N43°23.67′ W124°18.62′

NDB (LOM) 378 OT

ENTERPRISE MUNI

from rwy ends. Announce intentions arriving/departure on 122.8. 65' lgtd cell twr located 200' SW of Rwy 12.

Minor airframe and minor power plant repairs on call 541-426-4984. Be alert, soft edges and steep shoulders along rwy and twy. Parallel twy 20' wide, loose grvl on surface. Unlgtd helipad 150' SE of rotating bcn adjacent

(8S4)

0 E

to twv. COMMUNICATIONS: CTAF/UNICOM 122.8

NW. 23 SEP 2010 to 18 NOV 2010

OREGON 113 **ESTACADA** VALLEY VIEW (5S9) 1 NE UTC-8(-7DT) N45°18.49′ W122°19.12′ SEATTLE TPA-1685(950) NOTAM FILE MMV L-1B RWY 16-34: H3780X32 (ASPH) RWY 16: Thid dsplcd 490'. Trees. RWY 34: Trees. ଫ ଫ ଫ ଫ C3 AIRPORT REMARKS: Attended irregularly. LIRL Rwy 16-34 owner's use Œ Trailer only. Rwy 16 lgtd thid relocated 250' for ngt ops. Park COMMUNICATIONS: CTAF 122.9

G Same of ß €3 €3 Œ C3 03 C3 €3 €3 ß **3 3** €3 €3 Ø Ø Œ *C*3 43 Ç3 Œ €3 €3 34 €3 M €3 (3 ß ¢3 €3 **(3** ⟨3 C3 C3

KLAMATH FALLS

H-1B, L-1B

EUGENE N44°07.25′ W123°13.37′. NOTAM FILE EUG. (H) VORTACW 112.9 EUG Chan 76 at Mahlon Sweet Fld. 364/20E. HIWAS. RCO 122.3 (MC MINNVILLE RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE MMV.

NEWBERG (H) VORW/DME 117.4 UBG Chan 121 N45°21.19' W122°58.69' 074° 28.1 NM to fld. 1440/21E. HIWAS.

FIIGENE

MAHLON SWEET FLD (EUG) 7 NW UTC-8(-7DT) N44°07.40′ W123°13.12′

374 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—1174(800) Class I, ARFF Index B

NOTAM FILE EUG

RWY 16R-34L: H8009X150 (ASPH-GRVD) S-75, D-200,

2D-400 HIRL CL RWY 16R: ALSF2, TDZL, PAPI(P4L)-GA 3.0° TCH 50'.

RWY 34L: ODALS. VASI(V4L)-GA 3.0° TCH 53'.

RWY 16L-34R: H6000X150 (ASPH-GRVD) S-105. D-175.

2D-400 HIRL

RWY 16L: MALSR. PAPI(P4L)-GA 3.0° TCH 52'.

RWY 34R: REIL, PAPI(P4L)-GA 3.0° TCH 50'.


RUNWAY DECLARED DISTANCE INFORMATION RWY 16L: TORA-6000 TODA-6000 ASDA-6000

RWY 16R: TORA-8009 TODA-8009 ASDA-8009 RWY 34L: TORA-8009 TODA-8009 ASDA-8009

LDA-8009 RWY 34R: TORA-6000 TODA-6000 ASDA-6000 AIRPORT REMARKS: Attended continuously, Migratory waterfowl and other birds on and invof arpt. PPR for unscheduled air carrier ops

with more than 30 passenger seats call 541-682-5430. ARFF svcs unavailable 0000-0500 local except PPR 541-682-5430.

No access to Rwy 34L byd Twy A9. Helicopters Idg and departing avoid overflying the airline passenger terminal and ramp located E



GND CON/CLNC DEL 121.7

KLAMATH FALLS

H-1B, L-1B

IAP. AD

scheduled air carriers and flights with prior permission. HIRL Rwy 16L-34R and Rwy 16R-34L twr ctl 1400-0730Z‡, med ints 0730-1400Z‡. PAPI Rwy 16R and VASI Rwy 34L opr 24 hrs. ALSF Rwy 16R and 0DALS Rwy 34L, MALSR Rwy 16L, PAPI Rwy 16L and Rwy 34R, and REIL Rwy 34R twr ctl 1400-0730Z‡, 0730-1400Z‡ ACTIVATE-CTAF.

WEATHER DATA SOURCES: ASOS (541) 461-3114, HIWAS 112.9 EUG.

COMMUNICATIONS: CTAF 118.9 ATIS 125.225 (541) 607-4699 UNICOM 122.95 EUGENE RCO 122.3 (MC MINNVILLE RADIO)

 $\hbox{\it \ref{R}}$ cascade app/dep con 119.6 (340°-159°) 120.25 (160°-339°) (1400-0730Z‡)

R SEATTLE CENTER APP/DEP CON 125.8 (0730-1400Z‡)

EUGENE TOWER 118.9 (Rwv 16R-34L), 124.15 (Rwv 16L-34R) (1400-0730Z±)

AIRSPACE: CLASS D svc 1400-0730Z‡ other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE EUG. Chan 76 N44°07.25' W123°13.37' EUGENE (H) VORTACW 112.9 EUG at fld. 364/20E. HIWAS.

FRAKK NDB(MHW) 260 EU N44°12.77′ W123°13.23′ 160° 5.3 NM to fld. Rwy 16R. Class IIIE. OM FRAKK NDB ILS unmonitored when

ILS/DME 110.1 I–EUG Chan 38 tower closed.

ILS/DME 111.75 I-ADE Chan 54(Y) Rwy 16L. Class IE.

0 0 E T

6 €3

Œ

33

Ø €3

¢ Œ Ø C3 / €3 C3 63 €3

> Œ €3

€3

Œ

Œ

€3 # 300 # 300

Œ α×

C3

Residential

Area

KLAMATH FALLS

Ball Fields

Residentia

œ

Residential 3

KLAMATH FALLS

KLAMATH FALLS

L-1B

SEATTLE

Area

L-1A

N43°58.97′ W124°06.68′

FLORENCE

FLORENCE MUNI (6S2) 1 N UTC-8(-7DT)

NOTAM FILE MMV

RWY 15-33: H3000X60 (ASPH)

RWY 15: Rgt tfc. RWY 33: PAPI(P2L)-GA 3.0° TCH 40'. Trees. AIRPORT REMARKS: Attended 1630-0030Z‡. Birds, deer and wildlife on

and invof arpt. ACTIVATE MIRL Rwy 15-33-CTAF. PAPI Rwy 33

onr 24 hrs

2AWIH

NOTAM FILE MMV WATERWAY N-S: 9000X1000 (WATER)

WATERWAY NW-SE: 3200X1000 (WATER)

NOTAM FILE MMV RWY 07-25: 1940X50 (TURF) RWY 07: Trees.

(See ROSEBURG)

AIRPORT REMARKS: Unattended. COMMUNICATIONS: CTAF 122.9

WATERWAY N: Trees.

WATERWAY NW: Trees.

COMMUNICATIONS: CTAF 122.9 FRAKK N44°12.77′ W123°13.23′.

marked

GEORGE FELT

GATES DAVIS

B FUEL 100LL, JET A

WEATHER DATA SOURCES: AWOS-3 118.225 (541) 997-8664. COMMUNICATIONS: CTAF/UNICOM 122.8 RADIO AIDS TO NAVIGATION: NOTAM FILE OTH.

W124°10.11' 346° 34.1 NM to fld. 707/18E.

TPA-1051(1000)

MIRL

NORTH BEND (L) VORTACW 112.1 OTH Chan 58 N43°24.93'

LAKE WOAHINK SPB (10Ø) 4 S UTC-8(-7DT) N43°54.25' W124°06.88'

NDB unusable 020°-070° byd 15 NM and 170°-310° byd 11 NM.

(6S4) 1 S UTC-8(-7DT) N44°44.74′ W122°25.29′

RWY 25: Tree.

WATERWAY S: Trees. Rgt tfc.

WATERWAY SE: Trees. Rgt tfc.

NOTAM FILE EUG. NDB (MHW) 260 EU 160° 5.3 NM to Mahlon Sweet Fld. Unmonitored when twr clsd.

SEAPLANE REMARKS: Unattended. Noise abatement procedures in effect avoid overflight of homes. Sealanes not

NW. 23 SEP 2010 to 18 NOV 2010

S-12.5

GIENEDEN REACH

SILETZ BAY STATE (S45) UTC-8(-7DT) N44°52.62′ W124°01.71′ 1 SE 69 B TPA-1069(1000) NOTAM FILE MMV


RWY 17-35: H3300X60 (ASPH) S-11

RWY 17: Trees. Rgt tfc. RWY 35: Brush. AIRPORT REMARKS: Unattended, Wildlife on and invof arpt, Rwv 35 has

4-6 inch dip 800' from S end, MIRL Rwy 17-35 preset low intensity; ACTIVATE higher intensity-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

RADIO AIDS TO NAVIGATION: NOTAM FILE ONP. NEWPORT (H) VORTACW 117.1 ONP Chan 118 N44°34.52' W124°03.64' 345° 18.1 NM to fld. 150/19E.



SEATTLE

L-1B

L-2J

GOLD BEACH MUNI (4S1) 0 W UTC-8(-7DT) N42°24.92′ W124°25.50′

(See JOHN DAY)

TPA-2126(1000)

FUEL 100LL, JET A NOTAM FILE MMV B S4

RWY 16-34: H3237X75 (ASPH) S-12.5 MIRL

RWY 16: REIL, Thid dsplcd 90', Road, Rgt tfc. RWY 34: REIL. Road. AIRPORT REMARKS: Attended 1600-01007±, BE ALERT: Birds on and in the vicinity of arpt, ACTIVATE MIRL Rwy

16-34. REIL Rwv 16 and Rwv 34-CTAF.

WEATHER DATA SOURCES: AWOS-3 118.15 (541) 247-2518.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE CEC. CRESCENT CITY (L) VORTACW 109.0 CEC

GRANT CO RGNL/OGILVIE FLD

S4

1126 B

COMM/NAV/WEATHER REMARKS: UNICOM unmonitored.

GRANTS PASS (3\$8) 5 NW UTC-8(-7DT) N42°30.61' W123°23.28'

FUEL 100LL, JET A RWY 12-30: H4001X75 (ASPH) S-19 MIRL 0.8% up SE RWY 12: REIL. Trees.

RWY 30: REIL. VASI(V4R)-GA 4.25° TCH 55'. Trees. AIRPORT REMARKS: Attended 1600-0100Z±, 24 hr credit card fuel

and Rwy 30-CTAF. MIRL Rwy 12-30 on continuously.

avbl. VASI Rwy 30 not to be used for turbojet operations. Rwy 30 designated calm wind rwy. Rwy 12-30 has basic markings, plus aiming point markings. ACTIVATE VASI Rwy 30 and REIL Rwy 12

COMMUNICATIONS: CTAF/UNICOM 122.8 CASCADE APP/DEP CON 124.3 (1400-0700Z±) SEATTLE CENTER APP/DEP CON 121.4 (0700-1400Z±) RADIO AIDS TO NAVIGATION: NOTAM FILE MFR.

ROGUE VALLEY (H) VORTACW 113.6 OED Chan 83 N42°28.77'

W122°54.78' 256° 21.2 NM to fld. 2083/19E. HIWAS.

KLAMATH FALLS L-2J NOTAM FILE MMV IAP বৈ ও ও €3 G G €3 Ŧ 03 C3 -- (3

Chan 27 N41°46.77′ W124°14.44′ 329° 39.0 NM to fld. 54/19E.

HERMISTON MUNI (HRI) 2 SE UTC-8(-7DT) N45°49.69' W119°15.55' В S4 FUEL 100LL, JET A TPA-1444(800) NOTAM FILE HRI

RWY 04-22: H4500X75 (ASPH) S-22 MIRI

RWY 04: PAPI (P2L)-GA 3.0° TCH 36'. Tree. RWY 22: REIL. PAPI(P2L)-GA 3.5° TCH 37'. P-line. AIRPORT REMARKS: Attended Oct-Mar 1600-0100Z‡, Apr-Sep


1600-0200Z±, Parachute Jumping, ACTIVATE MIRL Rwv 04-22 and REIL Rwy 22-CTAF. PAPI Rwy 04 and Rwy 22 opr

continuously WEATHER DATA SOURCES: ASOS 135.225 (541) 567-8580.

COMMUNICATIONS: CTAF/UNICOM 122.8 R CHINOOK APP/DEP CON 133.15 (1400-0600Z‡) SEATTLE CENTER APP/DEP CON 132.6 (0600-1400Z±) RADIO AIDS TO NAVIGATION: NOTAM FILE PDT.

PENDLETON (H) VORTACW 114.7 PDT Chan 94

N45°41 91' W118°56.32' 280° 15.6 NM to fld. 1559/20E. HIWAS.



SEATTLE

SEATTLE

I-13A

IAP

HILLSBORD

STARK'S TWIN OAKS AIRPARK (783) 4 S UTC-8(-7DT) N45°25.71' W122°56.53' FUEL 100LL TPA-1110(940) NOTAM FILE MMV

LIRI

RWY 02-20: H2465X48 (ASPH) RWY 02: Thid dspicd 100'. Tree. RWY 20: Trees.

AIRPORT REMARKS: Attended dawn-dusk. Rwy Igts opr 0200-0800Z‡. For LIRL Rwy 02-20 after 0800Z‡ PPR call arpt

manager 503-628-2056.

COMMUNICATIONS: CTAF/UNICOM 123.05 PORTLAND CLNC DEL 119.95

HOBBY FLD (See CRESWELL)

KEN JERNSTEDT AIRFIELD (4S2) 2 S UTC-8(-7DT) N45°40.36' W121°32.19'

HOOD RIVER


RWY 07-25: H3040X75 (ASPH) S-23 LIRL RWY N7. Tree RWY 25: REIL. Road.

AIRPORT REMARKS: Attended Nov-Apr 1600-0100Z‡, May-Oct 1600-0200Z‡. Frequent vehicular tfc AER 07. Gliders and ultralights use right traffic for Rwys 07 and 25. ACTIVATE REIL Rwy

25-CTAF, Rwy 07-25 LIRL opr continuously. WEATHER DATA SOURCES: AWOS-3 134.375 (541) 386-2386.

COMMUNICATIONS: CTAF/UNICOM 122.8 RADIO AIDS TO NAVIGATION: NOTAM FILE DLS. KLICKITAT (H) VORW/DME 112.3 LTJ Chan 70 N45°42.81'

W121°06.05' 242° 18.5 NM to fld. 3220/21E. HIWAS.



HIIRRARD

LENHARDT AIRPARK (7S9) 3 E UTC-8(-7DT) N45°10.82' W122°44.61'

FUEL 100LL NOTAM FILE MMV RWY 02-20: H2956X45 (ASPH) LIRL


RWY 02: VASI(NSTD)-GA 7.0°. Thid dsplcd 230'. Road.

RWY 20: VASI(NSTD)-GA 4.0°. Trees.

AIRPORT REMARKS: Attended irregularly. Rwy 02 +6' fence 50' right of

Rwy 20 80' trees at 585'. Rwy 02 NSTD VASI one flashing/steady light on right side of rwy, Rwy 20 NSTD VASI one flashing/steady

threshold. Rwy 02 has powerline at 730'; 150' trees at 1536'. light on left side of rwy. Parallel twy west of rwy-grass. COMMUNICATIONS: CTAF 122.9



SEATTLE

GREAT FALLS

SEATTLE

ILLINOIS VALLEY (See CAVE JUNCTION)

IMNAHA

MEMALOOSE (25U) 10 SE UTC-8(-7DT) N45°25.66' W116°41.63'

6708 NOTAM FILE MMV

RWY 17-35: 3300X120 (DIRT)

COMMUNICATIONS: CTAF 122.9

RWY 17: Rgt tfc.

RWY 35: Trees. Rgt tfc.

AIRPORT REMARKS: Unattended. CLOSED winters. Livestock and wildlife on and invof arpt. No line of sight between rwy ends. Early Spring; damp soft spot on North end of rwy; land long to South. Rwy 35 expect downdrafts on short final due to sheer drop in terrain. Rwy 17-35 outlined with rocks painted white. Rwy 17-35 loose 3 inch-6 inch rocks on rwy; rwy poorly defined. South 1000' rough and overgrown with weeds. Rwy 35 thld marked by white rocks across rwy end.

INDEPENDENCE STATE (7S5)1 NW UTC-8(-7DT) N44°52.02' W123°11.89' 180 B FUEL 80, 100LL TPA-1180(1000) NOTAM FILE MMV

RWY 16-34: H3142X60 (ASPH) S-12.5

RWY 16: PAPI(P4R)-GA 3.0° TCH 40'. P-line. RWY 34: PAPI(P4L)—GA 3.0° TCH 40'. Thid dsplcd 140'. Road.

AIRPORT REMARKS: Attended daylight hours. Ultralight acft on and invof arpt. Migratory flocks of waterfowl on and invof arpt. ACTIVATE

MIRL Rwy 16-34, PAPI Rwy 16 and Rwy 34-CTAF. COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE MMV.

NEWBERG (H) VORW/DME 117.4 UBG Chan 121 N45°21.19'

W122°58.69' 177° 30.6 NM to fld. 1440/21E. HIWAS.

L-1B 9١ 8 3142 X 34 Residentia Area

JOHN DAY

GRANT CO RGNL/OGILVIE FLD (GCD)

3703 B FUEL 100LL JET A NOTAM FILE GCD RWY 17-35: H5220X60 (ASPH) S-12.5 MIRI RWY 17: REIL. PAPI(P4R)-GA 4.0° TCH 52'.

0.5% up S

1 SW UTC-8(-7DT) N44°24.17′ W118°58.07′

MIRL 1.3% up E

S-12.5

AIRPORT REMARKS: Attended Oct-May Mon-Sat 1600-0000Z‡, Jun-Sep Mon-Fri 1500-0300Z‡. Self service fuel available after hours.

Extensive helicopter activity during fire season Jul-Oct, Rwy 27 and Rwy 35 hold lines are marked in white outline only. Be aware of soft edges along rwys and twys. 8 foot game fence around arpt.

Rwy 17-35 basic markings, plus aiming point marks. Twy lines and Rwy 17-35 centerline markings incomplete, Rwy 27 relocated thld and Rwy 27 not marked. Twy marked with reflectors. ACTIVATE MIRL Rwy 09-27, MIRL Rwy 17-35, REIL Rwy 17 and

PAPI Rwv 17-CTAF. WEATHER DATA SOURCES: AWOS-3 118.375 (541) 575-1122.

COMMUNICATIONS: CTAF/UNICOM 122.8 SEATTLE CENTER APP/DEP CON 128.15.

RADIO AIDS TO NAVIGATION: NOTAM FILE MMV. KIMBERLY (H) VORTACW 115.6 IMB Chan 103 N44°38.90'

RWY 09-27: H4471X60 (ASPH)

RWY 27: Rgt tfc.

W119°42.70′ 095° 35.2 NM to fld. 5220/20E. HIWAS. COMM/NAV/WEATHER REMARKS: CLNC DEL thru Flight Services 1-800-WX-BRIEF.

JOSEPH STATE (JSY) 1 W UTC-8(-7DT)N45°21.57' W117°15.23'

FUEL 100LL TPA-5121(1000)

tkfs due to possible hazardous downdrafts south of arpt under

RWY 15-33: H5200X60 (ASPH) S-12.5 MIRI

RWY 15: REIL. PAPI(P2L)-GA 4.0° TCH 43'. Trees.

RWY 33: P-line. AIRPORT REMARKS: Unattended. Use extreme CAUTION during South

south wind conditions. Deer on arpt all hours. P-lines near Rwy 33 AER unmarked, Unicom unattended, ACTIVATE MIRL Rwy 15-33, PAPI and REIL Rwy 15-CTAF.

WEATHER DATA SOURCES: AWOS-3 123.775 (541) 432-0458. COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE MYL.

W116°12.38' 290° 57.0 NM to fld. 7333/19E.

DONNELLY (H) VORTACW 116.2 DNJ Chan 109 N44°46.03'

KARPEN N46°08.37′ W123°35.24′. NOTAM FILE AST.


5220 X 60 4471 X 60 ×

KLAMATH FALLS

H-1C, L-13A

IAP

SFATTLE



KEN JERNSTEDT AIRFIELD (See HOOD RIVER)

PEN

RCO 122.6 (MC MINNVILLE RADIO)

NDB (MHW) 201

HIWAS.

KIMBERLY N44°38.90′ W119°42.70′.

(H) VORTACW 115.6 IMB

Chan 103 094° 35.3 NM to Grant Co Rgnl/Ogilvie Fld. 5220/20E.

255° 12.2 NM to Astoria Rgnl. NDB unmonitored.

NOTAM FILE MMV.

SFATTLE

I_1C

SFATTLE

H-1C, L-13A

KLAMATH FALLS (LMT) 4 SE UTC-8(-7DT) N42°09.37' W121°43.99' FUEL 100LL, JET A OX 1, 3 Class I, ARFF Index A 4095 B S4 NOTAM FILE I MT

RWY 14-32: H10301X150 (ASPH-CONC-GRVD) S-110, D-145, 2S-175, 2D-230 RWY 14: MALSF. VASI(V4L)-GA 3.0° TCH 50'. Tree.

ASDA-4746

ASDA-4953

LDA-4439

LDA-4439

RWY 32: MALSR, VASI(V4L)-GA 3.0° TCH 50'. RWY 07-25: H5258X100 (ASPH-GRVD) S-38, D-52, 2D-87

RWY 07: Thid dsplcd 307', Railroad.

RWY 25: REIL. PAPI(P4L)-GA 3.0° TCH 40'. Thid dsplcd 514'.

RUNWAY DECLARED DISTANCE INFORMATION TORA-5260 TODA-5260 RWY N7-

RWY 25. TORA-5260 TODA-5260 ARRESTING GEAR/SYSTEM

RWY 14 ← HOOK BAK-12B(B) (1500')

HOOK BAK-12B(B) (1500')→ RWY 32

AIRPORT REMARKS: Attended 1500-0600Z‡. For services after hours call fixed base operator at 541-882-4681. Flocks of large migratory waterfowl in vicinity Nov-May. When twr closed

ACTIVATE MALSF Rwy 14, MALSR Rwy 32, HIRL Rwy 14-32 and MIRL Rwy 07-25 and twy lgts-CTAF. Rwy lgts have a 30 second warm up delay.

WEATHER DATA SOURCES: ASOS (541) 883-8127. HIWAS 115.9 LMT.

COMMUNICATIONS: CTAF 133.975 ATIS 126.5 UNICOM 122.95

RCO 122.6 (MC MINNVILLE RADIO)

(R) KINGSLEY APP/DEP CON 123.675 (Mon-Fri 1600-0000Z‡ exc weekends and holidays), other times ctc R SEATTLE CENTER APP/DEP CON 127.6

TOWER 133.975 (1500-0600Z±) **GND CON 121.9**

AIRSPACE: CLASS D svc 1500-0600Z‡ other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE LMT.

(H) VORTACW 115.9 LMT Chan 106 N42°09.19' W121°43.65' at fld. 4087/17E. HIWAS.

VOR portion unusable:

270°-280° bvd 20 NM

050°-060° byd 30 NM blo 12,000' 060°-120° byd 25 NM blo 12,000′

320°-050° byd 23 NM blo 12,000′ 170°-195° byd 20 NM 320°-050° byd 30 NM

210°-245° byd 25 NM blo 12,000'

DME portion unusable:

105°-125° byd 7 NM blo 12,000'

153°-195° bvd 20 NM blo 11.000'

210°-305° byd 25 NM blo 10,500' ILS 109.5 I-LMT Rwy 32.

320°-105° byd 13 NM blo 13,000′

320°-125° bvd 20 NM

LA GRANDE/UNION COUNTY (LGD) 4 SE UTC-8(-7DT) N45°17.41′ W118°00.43′

2717 B S4 FUEL 100LL, JET A NOTAM FILE LGD Not insp. RWY 12-30: H5600X100 (ASPH) S-65, D-90, 2S-114, 2D-130

RWY 12: PAPI(P2L). Road. RWY 30: REIL. PAPI(P2L)—GA 3.0°.

RWY 16-34: H3876X60 (ASPH) S-45, D-60, 2D-100

RWY 16: PAPI(P4L)—GA 3.0° TCH 35', Thid dsplcd 486', Road.

AIRPORT REMARKS: Attended Dec-Mar 1600-0200Z‡, Apr-Nov

1500-0300Z‡. For attendant 24 hours call 541-963-6714. Extensive Forest Service opr during summer months. Landing fee

for aircraft over 12,500 pounds. Rwy 16-34 marked with reflectors. Twvs marked with blue reflectors.

WEATHER DATA SOURCES: AWOS-3 135.075 (541) 963-6824.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.5 (MC MINNVILLE RADIO)

SEATTLE CENTER APP/DEP CON 132.6

RADIO AIDS TO NAVIGATION: NOTAM FILE BKE.

BAKER CITY (H) VORW/DME 115.3 BKE Chan 100

W117°48.47' 323° 28.3 NM to fld. 3380/20E. NDR (MHW) 296 LGD N45°20.55′ W117°57.76′

NM to fld. NOTAM FILE LGD. Unusable 160°-190° beyond 15 NM and 290°-315° beyond 15 NM.

SEATTLE H-1C. L-13A IAP 9١ 8 3876) strial Park 34

IAP, AD 0 0 × Construction

KLAMATH FALLS

H-3B 1-21

2AWIH

SEATTLE

KLAMATH FALLS

KLAMATH FALLS

KLAMATH FALLS

91

34

KLAMATH FALLS

L-1B

H-3B. L-11A IAP

H-3B, L-11A

L-1C

LAKE BILLY CHINOOK STATE (See CULVER) LAKE CO

(See LAKEVIEW)

LAKER N45°32.46′ W122°27.74′. NOTAM FILE PDX. NDB (MHW) 332 LBH 277° 6.4 NM to Portland Intl.

N43°34.99' W124°10.82'

LAKESIDE STATE (9S3) 0 NW UTC-8(-7DT) TPA-1020(1000) NOTAM FILE MMV

RWY 15-33: 2150X100 (TURF) RWY 15. Trees RWY 33. Trees AIRPORT REMARKS: Unattended. Rwy 15-33 rwy ends marked with white mats.

COMMUNICATIONS: CTAF 122.9

LAKEVIEW N42°29.57′ W120°30.43′ NOTAM FILE LKV.

RCO 122.3 (MC MINNVILLE RADIO)

(H) VORTACW 112.0 LKV Chan 57 147° 20.5 NM to Lake Co. 7460/19E.

I AKFVIFW LAKE CO 3 SW UTC-8(-7DT) N42°09.67' W120°23.95' (LKV)

FUEL 100LL, JET A TPA-5733(1000) NOTAM FILE LKV RWY 16-34: H5306X100 (ASPH)

S-74, D-86, 2S-109 RWY 16: VASI(V4L)-GA 3.0° TCH 55'. RWY 34: REIL, VASI(V4R)-GA 3.0° TCH 55'. AIRPORT REMARKS: Attended Apr-Sep 1700-0000Z‡, Oct-Mar 1500-0100Z‡. Flocks of large waterfowl in vicinity Nov-May.

Extensive airtanker ops in fire season. Possible glider ops on twv. Twy NE-SW used for strong cross wind ldg. Tetrahedron Igtng inoperative. Rwy 16 thld lgts, Rwy 16-34 edge lgts and Twy B edge reflectors obscured by vegetation. ACTIVATE MIRL Rwy 16-34, VASI Rwy 16 and Rwy 34 and REIL Rwy 34-CTAF. WEATHER DATA SOURCES: AWOS-3 135.525 (541) 947-5069.

HIWAS 112.0 LKV. COMMUNICATIONS: CTAF/UNICOM 122.8 LAKEVIEW RCO 122.3 (MC MINNVILLE RADIO) SEATTLE CENTER APP/DEP CON 127.6

RADIO AIDS TO NAVIGATION: NOTAM FILE LKV. LAKEVIEW (H) VORTACW 112.0 LKV Chan 57 W120°30.43' 147° 20.5 NM to fld. 7460/19E. HIWAS.

LAKE WOAHINK SPB (See FLORENCE)

LEBANON STATE (S3Ø) 1 SW UTC-8(-7DT) N44°31.79′ W122°55.77′ 344 B S4 FUEL 100LL. MOGAS TPA—1344(1000) NOTAM STATE MMV.

RWY 16-34: H2877X60 (ASPH) MIRI RWY 16: PAPI(P2L)-GA 3.0°TCH 40'. Tree.

AIRPORT REMARKS: Attended continuously. Acft departing Rwy 34 make 10° left turn after takeoff as soon as safety permits. Rwy 16-34 twy markings NSTD, marked with reflectors.

COMMUNICATIONS: CTAF/UNICOM 122.8

LENHARDT AIRPARK (See HUBBARD)

NDB (MHW) 225 LWG

LEWISBURG N44°36.82′ W123°16.24′.

169° 7.0 NM to Corvallis Muni.

NOTAM FILE CVO.

N42°29.57'

SEATTLE RWY 34: PAPI(P2L)—GA 3.5°TCH 40'. Thid dspicd 387'. Brush.

UTC-8(-7DT)

1 N

LEXINGTON

RAWIH

MADRAS MUNI (S33)

2437 B S4

RWY N4. P-line

(9S9)

1634 FUEL 100LL TPA-2634(1000) NOTAM FILE MMV B RWY 08-26: H4155X75 (ASPH) S-12.5 MIRL 1.3% up E RWY 08: VASI(V2L)-GA 3.0° TCH 44'. Fence. RWY 26: VASI(V2L)-GA 3.5° TCH 59'. AIRPORT REMARKS: Unattended. Fuel 24 hours credit card svc avbl. Rwy 08-26 200' gravel E end. ACTIVATE MIRL Rwv 08-26-CTAF. WEATHER DATA SOURCES: AWOS-3 134.475 (541) 989-8557. COMMUNICATIONS: CTAF 122.9

N45°27.25′ W119°41.42′

R SEATTLE CENTER APP/DEP CON 132.6 RADIO AIDS TO NAVIGATION: NOTAM FILE PDT.

PENDLETON (H) VORTACW 114.7 PDT Chan 94 N45°41.91' W118°56.32' 225° 34.9 NM to fld. 1559/20E.

3 NW UTC-8(-7DT) N44°40.21' W121°09.31' SEATTLE

RWY 16-34: H5089X75 (ASPH) S-75, D-120, 2D-180 MIRL RWY 34: VASI(V4L)-GA 3.0°. RWY 04-22: H2701X50 (ASPH) S-16 0.3% up NE

RWY 22: Road. AIRPORT REMARKS: Attended Nov-Apr 1600-0100Z‡, May-Oct 1600-0200Z‡. Rwy 04-22 marked with white

FUEL 100LL, JET A OX 3, 4 NOTAM FILE MMV

reflectors. Rwy 16-34 blue reflectors on twys. ACTIVATE MIRL Rwy 16-34 and VASI Rwy 34-CTAF. COMMUNICATIONS: CTAF/UNICOM 122.8 SEATTLE CENTER APP/DEP CON 128.15

RADIO AIDS TO NAVIGATION: NOTAM FILE RDM

4101/18E. HIWAS. MAHLON SWEET FLD

MALIN (4S7)1 SE

(See EUGENE)

H-1B. L-13A

UTC-8(-7DT) N42°00.06' W121°23.78'

NOTAM FILE MMV 4052

RWY 14-32: 2800X30 (TURF-GRVL)

RWY 14: P-line.

AIRPORT REMARKS: Unattended. Rwy 14-32 south 2500'. 3' irrigation sprinklers located along western edge. Rwy 14-32 west half full length is TURF; east half full length is GRVL.

COMMUNICATIONS: CTAF 122.9

NEHALEM BAY STATE (3S7)

TPA-1022(1000)

RWY 15-33: H2350X50 (ASPH) RWY 15: Trees

AIRPORT REMARKS: Unattended. **COMMUNICATIONS: CTAF 122.9**

RWY 32: Road.

NOTAM FILE MMV

2 S UTC-8(-7DT) N45°41.89' W123°55.79'

RWY 33: Deer and water fowl invof arpt. Unpaved twy and ramp.

NW. 23 SEP 2010 to 18 NOV 2010

DESCHUTES (H) VORTACW 117.6 DSD Chan 123 N44°15.17′ W121°18.21′ 356° 25.8 NM to fld.

IAP

SEATTLE

I-13A

IAP

KLAMATH FALLS

SEATTLE

MANZANITA

MC DERMITT STATE (26U) 0 W UTC-8(-7DT) N42°00.13' W117°43.39' TPA-5478(1000) NOTAM FILE MMV 4478 R

LIRL

RWY 16-34: H5900X60 (ASPH) S-12.5 AIRPORT REMARKS: Unattended. P-lines South and East. Vegetation growing in primary sfc.


COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE REO.

ROME (H) VORTACW 112.5 REO Chan 72 N42°35.43'

151° 35.9 NM to fld. 4050/19E. W117°52.09'

NDR (MHW) 204 RMD N42°00.69' W117°43.26' at fld NOTAM FILE MMV. VFR only.



KLAMATH FALLS

MC KENZIE BRIDGE STATE (ØØS) 3 E UTC-8(-7DT) N44°10.89′ W122°05.13′

S-40, D-50, 2D-80

TPA-2620(1000) NOTAM FILE MMV

503-378-4880 prior to use. Irregular winter maintenance. Rwy CLOSED when covered in snow. Rwy 6-24

RWY 06-24: 2600X90 (TURF)

RWY No. Trees RWY 24: Trees. AIRPORT REMARKS: Unattended. Wildlife on and invof arpt year round. Owner advises ctc with Oregon Dept of Aviation

RWY 04-22: H5420X150 (ASPH)

Land east-tkf west. Rwy 06 thld marked with white mats. Rwy edges marked with white panel markers. COMMUNICATIONS: CTAF 122.9

Scheduled by notam. High pressure bulk oxygen avbl Mon-Sat.

MC MINNVILLE MUNI (MMV) 3 SE UTC-8(-7DT)S4 FUEL 100LL, JET A OX 1 NOTAM FILE MMV

RWY 04: REIL. PAPI(P4L)-GA 3.0° TCH 40'. Trees. RWY 22: MALSR. PAPI(P4L)-GA 3.0° TCH 55'. Trees.

RWY 17-35: H4340X75 (ASPH) S-40, D-50, 2D-80 RWY 17: Tree.

AIRPORT REMARKS: Attended 1600Z‡-dusk. Fuel 24 hour credit card svc avbl. For fuel dusk-dawn contact fixed-base operator 503-472-0558. Military helicopter and parachute ops in area.

Glider ops Rwy 17-35 and within 8 NM blo 8000' during dalgt hours Feb-Nov. Evergreen Intl Aviation may be contacted on frequency 122.75. ACTIVATE MALSR Rwy 22, REIL Rwy 04, and HIRL Rwy 04-22-CTAF.

WEATHER DATA SOURCES: ASOS 135.675 (503) 434-9153.

COMMUNICATIONS: CTAF/UNICOM 123.0 RCO 122.45 (MC MINNVILLE RADIO)

R PORTLAND APP/DEP CON 126.0 (North)

SEATTLE CENTER APP/DEP CON 125.8 (South) **CLNC DEL** 118.35

RADIO AIDS TO NAVIGATION: NOTAM FILE MMV. Chan 121 N45°21.19' W122°58.69' NEWBERG (H) VORW/DME 117.4 UBG

HIWAS.

ILS 110.9 I-MMV Rwy 22. Class 1A

MCNARY FLD (See SALEM)

MEDFORD N42°23.50′ W122°52.73′ NOTAM FILE MFR.

NDB (MHW) 356 MEF 148° 1.1 NM to fld. LOM unusable 220°-240° beyond 15 NM. RCO 122.65 (MC MINNVILLE RADIO)

slopes up to the east. Expect significant turbulence and downdrafts near rwy. Rwy 06-24 rough on east half. N45°11.67′ W123°08.16′ SEATTLE H-1B, L-1B IAP C ۷١. œ Ca Ca Ca €3 1340 ß ∇ G G €3 C3 3.5

> KLAMATH FALLS L-21

194° 11.6 NM to fld. 1440/21E.

MFNFNRN

ROGUE VALLEY INTL-MEDFORD (MFR)

1335 B S4

RWY 14-32: H8800X150 (ASPH-GRVD) S-200, D-200, 2S-175, 2D-400 HIRL CL

Class I. ARFF Index B

Rwy 09-27: 3136 X 100

145° 6.6 NM to fld. 2083/19E. HIWAS.

KIAMATH FALLS

H-3B, L-21

IAP. AD

43

SEATTLE

KLAMATH FALLS

RWY 14: MALSR, TDZL, PAPI(P4L)—GA 3.0 TCH 73' 0.4% up. RWY 32: REIL. VASI(V4L)—GA 3.0° TCH 49' 0.5% down. RWY 09-27: H3136X100 (ASPH) S-63, D-70, 2S-89, 2D-105 MIRL(NSTD) 0.4% up E

NOTAM FILE MFR

FUEL 100LL, JET A OX 1, 3 TPA—See Remarks

3 N UTC-8(-7DT) N42°22.45' W122°52.41'

RUNWAY DECLARED DISTANCE INFORMATION RWY 09: TORA-3136 TODA-3136 ASDA-3136 LDA-3136 RWY 14: TORA-8800 TODA-8800 ASDA-8800 LDA-8800 RWY 27: TORA-3136 TODA-3136 ASDA-3136 LDA-3136

RWY 32: TORA-8800 TODA-8800 ASDA-8800 LDA-8800 AIRPORT REMARKS: Attended 1300-0800Z‡. For fuel after hrs call 541-779-5451, or 541-842-2254. Bird hazard large flocks of migratory waterfowl in vicinity Nov-May. Rwy 09-27 CLOSED to

acft over 12,500 lbs GWT. PPR for unscheduled ops with more than 30 passenger seats, call arpt operations 541-776-7228.

Rwy 32 preferred for tkfs and landings when twr clsd. Twv B/B-1 not visible from twr between twy B-2 and AER 9. TPA-2304(969) for propeller acft: 2804(1469) for turbo acft, Rwv 09-27 NSTD MIRL first 10' of Rwy 09 unlgt and first 9' of Rwy 27 unlgt, 3136 lgtd. ACTIVATE HIRL Rwy 14-32, MALSR Rwy 14, REIL Rwy 32, TDZL Rwy 14, centerline Igts Rwy 14 and Rwy 32, and twy Igts—CTAF. PAPI Rwy 14 and VASI

Rwy 32 on continuously. U.S. Customs user fee arpt. Ldg fee applies to all corporate acft and all other acft with weight exceeding 12,500 lbs. WEATHER DATA SOURCES: ASOS (541) 776-1238. HIWAS 113.6 OED.

COMMUNICATIONS: CTAF 119 4 ATIS 127.25 MEDEURD RCO 122 65 (MC MINNVII I E RADIO) (R) CASCADE APP/DEP CON 124.3 (1400-0700Z‡)

SEATTLE CENTER APP/DEP CON 124.85 (0700-1400Z‡) MEDFORD TOWER 119.4 (1400-0500Z‡) **GND CON 121.8** AIRSPACE: CLASS D svc 1400-0500Z‡ other times CLASS E. RADIO AIDS TO NAVIGATION: NOTAM FILE MFR.

(H) VORTACW 113.6 OED Chan 83 N42°28.78' W122°54.77' MEDFORD NDB (MHW) 356 MEF N42°23.50′ W122°52.73′ 148° 1.1 NM to fld.

PUMIE NDB (LOM) 373 MF N42°27.06′ W122°54.80′ 140° 4.9 NM to fld. LOM unusable 260°-270° beyond 10 NM **ILS/DME** 110.3 I-MFR Chan 40 Rwy 14. Class IA. LOM PUMIE NDB. ILS unmonitored when tower

Back Course unusable byd 20° left of course.

(See IMNAHA) MILLER MEMORIAL AIRPARK (See VALE)

MEMALOOSE

MONUMENT MUNI (12S)1 NW UTC-8(-7DT)

TPA-3323(1000) NOTAM FILE MMV RWY 14-32: 2104X29 (ASPH)

AIRPORT REMARKS: Unattended. Intermittently CLOSED winters due to snow. Rwy 14 rwy ends marked at each corner

COMMUNICATIONS: CTAF 122.9 MULINO STATE

(See PORTLAND-MURINO)

by a single white tire.

MYRTLE CREEK MUNI (16S)2 SW

RWY 03-21: H2600X60 (ASPH)

UTC-8(-7DT)619 R TPA-1600(981)

NOTAM FILE MMV

03-21, REIL Rwy 03 and PAPI Rwy 03-CTAF. UNICOM unmonitored indef.

S-12 MIRL

RWY 03: REIL. PAPI(P2L)-GA 4.0° TCH 41'. Tree. Rgt tfc. RWY 21: Tree.

closed. LOC Back Course unusable byd 11 NM blo 7000', byd 13 NM blo 8300', byd 17 NM blo 8700'. LOC

N44°49.89' W119°25.78'

N42°59.84' W123°18.92'

AIRPORT REMARKS: Unattended. Terrain rises to 2200' MSL within 2 miles on each side of rwy. ACTIVATE MIRL Rwys

COMMUNICATIONS: CTAF/UNICOM 122.7

NEHALEM BAY STATE (See MANZANITA)

N45°17.74′ W122°57.32′

HIRI

R

€3

112°-132° byd 35 NM blo 8,000′

132°-162° byd 35 NM blo 5,000′

158° 5.8 NM to fld. Unusable 360°-150°

Œ ¢

a

SEATTLE

SFATTLE

SEATTLE

SFATTLE

IAP

H-1B, L-1B

G G

3

€3

 \sim

C3

03

63

KLAMATH FALLS

L-1A

H-1B. L-1B

(H) VORW/DMF 117 4 UBG 105° 10.9 NM to Aurora State, 1440/21E, HIWAS. Chan 121 RCO 122.45 (MC MINNVILLE RADIO) NFWBFRG CHEHALEM AIRPARK (17S) 4 N UTC-8(-7DT) N45°19.42′ W123°03.26′

FUEL 100LL, JET A NOTAM FILE MMV RWY 07-25: H2285X40 (ASPH)

SPORTSMAN AIRPARK

S4

181

COMMUNICATIONS: CTAF 122.9 PORTLAND CLNC DEL 126.0 **NEWPORT MUNI** (ONP)

RWY 16-34: H5398X150 (ASPH)

RWY 02-20: H3001X75 (ASPH)

1.0% up NE

MIRI

RWY 02: Ground.

NEWBERG N45°21.19' W122°58.69'.

RWY LGTS(NSTD) RWY 07: Thid dsplcd 300', P-line. RWY 25: Tree.

AIRPORT REMARKS: Attended 1600-0200Z‡. Rwy 25 has noise abatement procedures in effect for more information ctc aprt manager 503-537-0108. Rwy 07-25 NSTD basic markings, NSTD size, rwy edge strips. Rwy 07 dsplcd

thId NSTD markings, NSTD size. Rwy 07-25 NSTD green thId Igts at W end only; no thId Igts on E end; 300' dsplcd thid unigtd. COMMUNICATIONS: CTAF 122.9

UTC-8(-7DT)(2S6)1 SE

FUEL 100LL, JET A NOTAM FILE MMV S-30

RWY 17-35: H2755X50 (ASPH) RWY 17: Thid dspicd 369'. Tree. AIRPORT REMARKS: Attended dawn-dusk, Arpt lgts opr sunset-0800Z±, For LIRL Rwy 17-35 after 0800Z± phone

3 S

LIRL

RWY 35: Thid dsplcd 315'. Brush. Rgt tfc.

503-538-2134. Rwy 17-35 alligator cracks, dips, patch work in poor condition and edge cracks, needs joint

NOTAM FILE MMV.

UTC-8(-7DT) N44°34.82′ W124°03.48′ FUEL 100LL, JET A. Class IV, ARFF Index A. NOTAM FILE ONP. S-75, D-120, 2S-152, 2D-170 RWY 16: MALSR. VASI(V4R)-GA 3.0° TCH 50'. Rgt tfc.

RWY 34: REIL, PAPI(P4L)—GA 3.0° TCH 50', Thid dspicd 300'. S-33, D-50, 2D-84 RWY 20: Rgt tfc. RUNWAY DECLARED DISTANCE INFORMATION

RWY 02: TORA-3001 TODA-3001 ASDA-3001 LDA-3001 **RWY 16:** TORA-5398 TODA-5398 ASDA-5398 LDA-5398 RWY 20: TORA-3001 TODA-3001 ASDA-3001 LDA-3001 RWY 34: TORA-5398 TODA-5398 ASDA-5398 IDA-5398 AIRPORT REMARKS: Attended 1600-0100Z‡. For fuel after hours

call 541-867-3655 or 541-961-9725. Deer and covotes on and invof rwys and twys. Birds invof arpt during Apr and Oct. PPR for air carrier ops with more than 30 passenger seats, call arpt manager 541-867-7422. ACTIVATE MALSR Rwy 16, MIRL Rwy 02-20, HIRL Rwy 16-34, and REIL Rwy 34-CTAF. WEATHER DATA SOURCES: AWOS-3 133.9 (541)-867-4175. COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.5 (MC MINNVILLE RADIO) SEATTLE CENTER APP/DEP CON 125.8 RADIO AIDS TO NAVIGATION: NOTAM FILE ONP. (H) VORTACW 117.1 ONP Chan 118 N44°34 52

W124°03.64' at fld. 150/19E. VORTAC unusable:

012°-087° byd 30 NM blo 5000'. RCO 122.4 (MC MINNVILLE RADIO)

342°-007° byd 35 NM blo 5,000′

007°-047° byd 35 NM blo 6,000'

057°-112° byd 35 NM blo 7,000' AGGET NDB (LOM) 350 ON N44°40.56′ W124°03.92′ I-ONP Rwy 16.

LOM AGGET NDB. LOM unusable 360°-150° ILS 111.5

NORTH BEND N43°24.93′ W124°10.11′ NOTAM FILE OTH

(L) VORTACW 112.1 OTH Chan 58 253° 3.4 NM to Southwest Oregon Rgnl. 707/18E. HIWAS.

VORTAC unusable:

NORTH REND

SOUTHWEST OREGON RGNL (OTH) 1 NW UTC-8(-7DT) N43°25.02′ W124°14.82′

S4 FUEL 100LL, JET A. Class I, ARFF Index A. NOTAM FILE OTH RWY 04-22: H5980X150 (ASPH-PFC-GRVD) S-106, D-113, 2S-143, 2D-190 HIRL

S-90, D-100, 2S-175,

KLAMATH FALLS H-1B. L-1A IAP. AD

KLAMATH FALLS

RWY 04: MALSR. REIL. VASI (V4R)-GA 3.0° TCH 38'. Boat.

RWY 22: Thid dsplcd 660', Ship.

RWY 13-31: H4470X150 (ASPH-GRVD)

2D - 100MIRI

RWY 13: REIL. Ship.

RWY 31: REIL. PAPI(P4L)-GA 4.0° TCH 50', Road, Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 04: TORA-5321 TODA-5321

ASDA-5321 LDA-5321 RWY 22: TORA-6000 TODA-6000 ASDA-6000 LDA-5321 AIRPORT REMARKS: Attended continuously. Services avbl 1600-0100Z‡, for services after hours call 541-756-5181 or 541-756-6903.

Migratory flocks of waterfowl on and in vicinity of arpt. PAEW invof rwys and twys 1530-23307±. Ship channel crosses Rwy 04 approximately 3 mile from thid, crosses Rwy 13 and Rwy 22 approximately 1000' to 1700' from thid, mast heights to 140'. Landing fee. Non-commercial landing fee for all acft over 12,500 lbs. ACTIVATE MALSR Rwv 04-CTAF, HIRL Rwv 04-22 and MIRL

Rwy 13-31 opr continuously at night. WEATHER DATA SOURCES: AWOS-3 135.075 (541) 756-0135.

HIWAS 112.1 OTH.

COMMUNICATIONS: CTAF 118.45 NORTH BEND RCO 122.4 (Mc MINNVILLE RADIO)

SEATTLE CENTER APP/DEP CON 121.4

NORTH BEND TOWER 118.45 (1500-0500Z‡)

AIRSPACE: CLASS D svc 1500-0500Z± other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE OTH NORTH BEND (L) VORTACW 112.1 OTH

Chan 58 N43°24.93' W124°10.11' 253° 3.4 NM to fld. 707/18E. 2AWIH

EMIRE NDB (LOM) 378 OT N43°23.67′ W124°18.62′ 046° 3.1 NM to fld. NDB unusable 360°-165° byd 10 NM.

I-OTH Rwv 04. LOM EMIRE NDB.

OAKRIDGE STATE N43°45.16′ W122°30.15′ (5SØ) 1 W UTC-8(-7DT)TPA-2393(1000) NOTAM FILE MMV

RWY 09-27: H3610X47 (ASPH)


RWY 09: Trees. RWY 27: Road.

AIRPORT REMARKS: Unattended. Irregular winter maintenance, arpt may be clsd by snow. US Forest Service helicopters active in vicinity of arpt during fire season. Deer and elk on and invof arpt.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE EUG.

EUGENE (H) VORTACW 112.9 EUG Chan 76 N44°07.25' W123°13.37' 105° 38.3 NM to fld. 364/20E. HIWAS.



L-1A 00000 €3 €3 43 €3 €3 æ Ø

ONTARIO MUNI (ONO) 3 W UTC-7(-6DT) N44°01.16′ W117°00.78′ R S4 FUEL 100LL, JET A NOTAM FILE ONO 2193

RWY 14-32: H5011X100 (ASPH) S-30 D-50 KLAMATH FALLS H-1C, L-11B IAP

AIRPORT REMARKS: Attended 1500-0000Z‡. Self serve card lock fuel

avbl 24 hrs. Twy marked with blue reflectors. ACTIVATE MIRL Rwy

14-32 and REIL Rwy 32-CTAF, PAPI Rwy 32 OPR continuously.

WEATHER DATA SOURCES: ASOS 135.275 (541) 889-7388.

W116°11.53' 291° 45.3 NM to fld. 2876/17E.

RWY 32: REIL. PAPI(P2L)-GA 3.0°

COMMUNICATIONS: CTAF/UNICOM 122.8 R SALT LAKE CENTER APP/DEP CON 128.05 RCO 122.3 (MC MINNVILLE RADIO) RADIO AIDS TO NAVIGATION: NOTAM FILE BOI. BOISE (H) VORTACW 113.3

NDB (MHW) 305

NOTAM FILE ONO.

BOI Chan 80 N43°33.17'

ONO N44°01.18' W117°00.50'

at fld

Golf Cours

OWYHEE RESERVOIR STATE (28U) 25 SW UTC-8(-7DT) N43°25,49′ W117°20,73′

SEATTLE

KLAMATH FALLS

L-11A

KLAMATH FALLS

TPA-3680(1000) 2680 NOTAM FILE MMV RWY 13-31: 1840X30 (DIRT)

AIRPORT REMARKS: Unattended, Rwv 13-31 sfc rough, loose rocks, soft when wet, subject to washouts, Owner

advises ctc with State Department of Aviation 503-378-4880 prior to use. Remote airport, no ground access. Arpt in canyon, surrounded by high terrain. COMMUNICATIONS: CTAF 122.9

PACIFIC CITY STATE (PFC) 1 S UTC-8(-7DT) N45°11.99' W123°57.74' TPA-1005(1000) NOTAM FILE MMV

RWY 14-32: H1875X30 (ASPH) S-7RWY 14: Thid dsplcd 300'. P-line. RWY 32: Trees.

AIRPORT REMARKS: Unattended. Rwy may be under water during winter high tides. Occasional driftwood on rwy due to

flooding. Owner advises ctc with Department of Aviation 503-378-4880 prior to use. Ramp in poor condition.

Rwy 14-32 NSTD basic markings, markings NSTD size/placement and rwy edge markings. COMMUNICATIONS: CTAF 122.9

PAISLEY (22S) 3 NW UTC-8(-7DT)

N42°43.08' W120°33.77' R TPA-5395(1000) NOTAM FILE MMV LIRI

COMMUNICATIONS: CTAF 122.9 RADIO AIDS TO NAVIGATION: NOTAM FILE MMV. LAKEVIEW (H) VORTACW 112.0 Chan 57 N42°29.57′ W120°30.43′ 331° 13.7 NM to fld. 7460/19E.

HIWAS.

RWY 13-31: H4300X60 (ASPH)

AIRPORT REMARKS: Unattended.

RCO 122.2 (MC MINNVILLE RADIO)

PENDLETON N45°41.91′ W118°56.32′ NOTAM FILE PDT.

(H) VORTACW 114.7 PDT Chan 94 1559/20E. HIWAS.

073° 4.1 NM to Eastern Oregon Rgnl at Pendleton.

SEATTLE H-1C, L-13A

PENDI FTON

EASTERN OREGON RGNL AT PENDLETON (PDT) 3 NW UTC-8(-7DT) N45°41.70' W118°50.49' S4 FUEL 100LL, JET A1 +, MOGAS Class IV, ARFF Index A NOTAM FILE POT RWY 07-25: H6301X150 (ASPH-PFC) S-115, D-132, 2S-167, 2D-210

RWY 07: ODALS. VASI(V4R)-GA 3.0° TCH 47'. Ground. RWY 25: MALSR, PAPI(V4L)-GA 3.0° TCH 55'. RWY 11-29: H5581X100 (ASPH-GRVD) S-70, D-120, 2S-152,

ODALS Rwy 07, HIRL Rwy 07-25, MIRL Rwy 11-29, REIL Rwy 11 and Rwy 29, when twr clsd—CTAF. Rwy 25

2D-122 MIRI RWY 11: REIL, PAPI(V4L)-GA 3.0° TCH 47', Ground, RWY 29: REIL, PAPI(V4L)-GA 3.0° TCH 35', Thid dspicd 456'.

RWY 16-34: H4341X60 (ASPH) S-20 0.8% up SE

RUNWAY DECLARED DISTANCE INFORMATION

RWY 11: TORA-5581 TODA-5581 ASDA-5581 LDA-5581

RWY 34: TORA-4341 TODA-4341 ASDA-4341

RWY 16: TORA-4341 TODA-4341 ASDA-4341 LDA-4341

RWY 29: TORA-5581 TODA-5581 ASDA-5581 LDA-5125

LDA-4341 AIRPORT REMARKS: Attended 1400-04007±. Services available from FBO between 0400-1400Z[±] by phone call 541-276-3313/3373. Self fuel avbl 24 hrs. CLOSED to unscheduled air carrier ops with more than 30 passenger seats except PPR 24 hrs call 541-276-4411. Deer on and invof arpt Apr and Aug especially mornings and evenings. Twy B clsd south of Twy A. Pilots shall

exercise extreme caution at intersection of ramp and Rwv 29

6301 X 150 north end of terminal building area obstructed from view of tower by terminal building. ACTIVATE MALSR Rwy 25,

SEATTLE

IAP. AD

H-1C, L-13A

KLAMATH FALLS

SEATTLE

SEATTLE

L-1C

touchdown runway visual range avbl. WEATHER DATA SOURCES: ASOS 118,325 (541) 278-2329. HIWAS 114,7 PDT. COMMUNICATIONS: CTAF 119.7 UNICOM 122.95

PENDLETON RCO 122.2 (MC MINNVILLE RADIO) R CHINOOK APP/DEP CON 133.15 (1400-0600Z‡).

R SEATTLE CENTER APP/DEP CON 132.6 (0600-1400Z‡) PENDLETON TOWER 119.7 (1400-0400Z‡). **GND CON 121.9**

AIRSPACE: CLASS D svc 1400-0400Z‡ other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE PDT. PENDLETON (H) VORTACW 114.7 PDT Chan 94 N45°41.91′ W118°56.32′ 073° 4.1 NM to fld. 1559/20E.

and tkf 040°/068°/115°. Landing fee.

HIWAS. ILS 110.3 I-PDT Rwy 25. Class IE. LOC and GS unmonitored when twr clsd.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not available at tower. (24S)1 SW UTC-8(-7DT) N42°06.61' W122°22.99'

PINEHURST STATE TPA-4638(1000) NOTAM FILE MMV Not insp.

RWY 04-22: H2800X30 (ASPH)

RWY 04: Trees. RWY 22: Trees.

AIRPORT REMARKS: Unattended. Irregular winter maintenance. Arpt may be clsd by snow. Rwy 04-22 70' trees along both sides of rwy 125' from centerline. Rwy 22 slopes up to the SW, with abrupt 4% rise on SW half of rwy.

Owner advises contact Oregon Dept. of Aviation 503-378-4880 prior to use.

COMMUNICATIONS: CTAF 122.9

PORTLAND N45°41.92′ W122°55.52′

RCO 122.6 (MC MINNVILLE RADIO)

PORTI AND

(61J) 00 N UTC-8(-7DT) N45°31.52′ W122°40.26′

PORTLAND DOWNTOWN HELIPORT R NOTAM FILE MMV

HELIPAD H1: H80X80 (CONC) S-25 HELIPORT REMARKS: Unattended. +199' radio twr (lgtd) 4950' E of heliport in flight apch and tkf 025°. Helipad H1 yellow perimeter lgts, blue centerline twy lgts to helipads. Helipad H1 single heliport with 4 flight apchs

162°/220°/248°/295°/ and tkf directions 342°/040°/068°/115°. Arrow lgts for flight apch 220°/248°/295°

COMMUNICATIONS: CTAF/UNICOM 123.075

03 C3

⟨3

600+150

SEATTLE

IAP. AD

H-1B I-1C

PORTLAND-HILLSBORO (HIO) 15 SW UTC-8(-7DT) N45°32.44′ W122°57.01′ FUEL 100LL, JET A OX 1, 2, 4 TPA-1208 (1000) LRA NOTAM FILE HIO

RWY 12-30: H6600X150 (ASPH) S-50, D-70, 2S-89, 2D-110 HIRL

RWY 12: MALSR. PAPI(P4L)-GA 3.0° TCH 49'. ~ °

RWY 30: REIL. PAPI(P4L)-GA 3.0° TCH 50'. Trees. Rgt tfc. RWY 02-20: H4050X100 (ASPH) S-45, D-58, 2D-90

RWY 02: VASI(V4L)-GA 3.0° TCH 50'. Tree. Rgt tfc.

RWY 20: VASI(V4L)-GA 3.0° TCH 50'. Thid dspicd 172'. Fence.

LAND AND HOLD SHORT OPERATIONS

LANDING HOLD SHORT POINT DIST AVRI

RWY 12 02-20 4922

AIRPORT REMARKS: Attended 1400-0600Z‡. Rwy 02-20 CLOSED to touch and go landings between 0600-1400Z‡. Be alert for bird

activity in vicinity Nov to May. Noise abatement procedures in

effect call 503-693-1963 or 503-460-4068. Rwy 12 run-up area not visible from twr. Rwy 12 touchdown rwy visual range avbl. Commercial acft and operators of acft with an FAA certified maximum gross Idg weight that exceeds 10,000 lbs are required to

pay a ldg fee. When twr clsd ACTIVATE MALSR Rwy 12-CTAF. Flight Notification Service (ADCUS) avbl, 2 hour advance notice

required Mon-Sat 0100-1400Z‡ and 24 hrs Sun and holidays. Ldg

WEATHER DATA SOURCES: ASOS (503) 640-2984. COMMUNICATIONS: CTAF 119.3 ATIS 127.65. UNICOM 122.95 (R) APP/DEP CON 126 O

HILLSBORO TOWER 119.3 (1400-0600Z‡). GND CON 121.7

AIRSPACE: CLASS D svc 1400-0600Z‡ other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE MMV.

NEWBERG (H) VORW/DME 117.4 UBG Chan 121 N45°21.19' W122°58.69' 345° 11.3 NM to fld.

1440/21E. HIWAS.

B S4

208

BANKS NDB (MHW) 356 PND N45°37.82′ W123°02.75′ 122° 6.7 NM to fld. NOTAM FILE HIO. ILS 110.7 I-HIO Rwy 12. Class IE. ILS unmonitored when ATCT closed. Localizer unusable byd 27° each side of course.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

(PDX)(KPDX) CIV/MIL/AFRC/ANG 4 NF UTC-8(-7DT) N45°35.32' W122°35.81 R S4 FUEL 100LL, JET A OX 1, 2, 3, 4 LRA Class I. ARFF Index E NOTAM FILE PDX H-1R I-1C IAP, DIAP, AD RWY 10R-28L: H11000X150 (ASPH-GRVD) S-200, D-200, 2S-175, 2D-360

PCN 63 F/A/X/T HIRL CL RWY 10R: ALSF2. TDZL. PAPI(P4R)-GA 3.0° TCH 71'. Rgt tfc. ଫଟଟ ଫଟଟ

RWY 28L: MALSR. VASI(V4L)-GA 3.0° TCH 60'. S-200, D-200, 2S-175,

RWY 10L-28R: H9825X150 (ASPH-GRVD) 2D-400 PCN 63 F/A/X/T HIRL CL

RWY 10L: MALSR. PAPI(P4L)-GA 3.0° TCH 60'. Thid dspicd 1290'. RWY 28R: MALSR. PAPI(P4R)—GA 3.0° TCH 65'. Thid dspicd 535'.

Road, Rgt tfc. RWY 03-21: H6000X150 (ASPH-GRVD) S-124, D-170, 2S-175,

2D-310 PCN 34 F/A/X/T MIRL RWY 03: REIL. PAPI(P4L)-GA 3.3° TCH 60'.

RWY 21: REIL. PAPI(P4R)-GA 3.6° TCH 32'. Road.

RUNWAY DECLARED DISTANCE INFORMATION

30

RWY 03: TORA-6000 TODA-6000 ASDA-6000 RWY 10L: TORA-9825 TODA-9825 ASDA-9825

RWY 10R: TORA-11000 TODA-11000 ASDA-11000 LDA-11000

RWY 21: TORA-6000 TODA-6000 LDA-6000 ASDA-6000 RWY 28L: TORA-11000 TODA-11000 ASDA-11000 LDA-11000 RWY 28R: TORA-9825 TODA-9825 ASDA-9825 LDA-9290

ARRESTING GEAR/SYSTEM RWY 10R BAK-14 BAK-12A(B) (1625')

BAK-14 BAK-12A(B) (2000') RWY 28L MILITARY SERVICE: A-GEAR BAK-12A(B) Rwy 10R and 28L cable raised by BAK-14 device on request to twr. Not JASU (AM32A-60) 4(A/M32A-86) (MC-11) 1(MA-1A)

COCO

G^CC

a

inspected for opr capability weekend or holiday. FUEL A, J8(Mil) (NC-100LL, Jet A) A (Air BP-Flightcraft Inc., C603-331-4220.) **FLUID LHOXRB** OIL 0-128-133-148(Mil)

AIRPORT REMARKS: Attended continuously. Arpt CLOSED to non-powered acft except in emergencies. Migratory and wintering flocks of large waterfowl on and in vicinity of arpt. Heavy seagull activity Sep-Apr, expect high number of birds year around; check local advisories, Construction on Rwy 10L-28R in progress, See NOTAMS for current information. Rwy 28R perimeter road at 200' from rwy thId and 408' right from rwy extended centerline. Uncontrolled tfc at Pearson Field Vancouver WA, 3 NM W of Rwy 10L thld on extended centerline. Rwy 21 clsd to Height Group IV acft with cockpit to wheel height greater than 22'. Rwy 28R road in levee 480' right. Rwy 28R

LDA-6000

LDA-8535

19' levee located approximately parallel to rwy centerline extended at 200' from thid. Dike located approximately 408' from rwy centerline extended. Noise abatement procedures in effect call noise office. 503-460-4100. Rwy 28L arrivals are noise sensitive, expect apch to Rwy 28R with transition to Rwy 28L. Touchdown, midpoint and rollout rwy visual range avbl Rwy 10R-28L and Rwy 10L-28R. Twy T between the North Ramp and the General Aviation Ramp clsd to through tfc. Twy W between Twy A and the general aviation ramp clsd to acft with wingspan greater than 95'. Acft with wingspan between 79' and 95', must be towed. Twy K between the north ramp and the general aviation ramp clsd to through tfc. Twy F between Rwy 10R-28L and Twy C clsd to acft over 65,000 pounds. Twy F clsd to non-Part 139 acft with wingspan greater than 194'. Twy F clsd to Part 139 acft with wingspan greater than 108'. At the west end arm/dearm area on Twy C no acft of any type may taxi past the arm/dearm area while it is being used. Acft authorized to utilize the northwest ramp or the north ramp will be towed to/from these ramps. Area of Twy T between M and E3 not visible from tower. Twy T between exits B5 and B6 clsd to acft with wingspan of 118' and greater. Twy J clsd to acft with a wingspan

Commercial acft and operators of acft with an FAA certified maximum gross Idg weight that exceeds 10,000 lbs are required to pay a Idg fee. Flight Notification Service (ADCUS) available. MILITARY REMARKS: ANG See FLIP AP/1 for Supplementary Arpt Information. Hazardous bird conditions exist. Phase I May-Oct, Phase II Nov-Apr. Current bird watch conditions are not reported on ATIS. PPR/Official Business Only. Base ops opr 1500-2300Z‡ Mon-Fri exc holiday, DSN 638-4390, C503-335-4390. Ctc Base OPS 15 min prior to ldg and after dep on 281.2. Tran quarters not avbl.

greater than 171'. Acft with wingspan between 125' and 171' on Twy J must be under positive guidance by either towing or wingwalker. Twy V clsd to acft with wingspan greater than 135'. Acft with wingspan greater than 91' prohibited from turning westbound onto Twy A from Twy V unless under tow. 180° turns by acft weighing in excess of 12,500 lbs prohibited on all rwys and taxiways. Rwy 10L and Rwy 28R MALSR OTS indef. Ldg fee.

WEATHER DATA SOURCES: ASOS (C503) 284-6771. WSP.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

COMMUNICATIONS: D-ATIS 128.35 269.9 503 493-7557.

UNICOM 122.95

R APP CON 124.35 299.2 (280°-099°) 118.1 (100°-279°) 284.6 (100°-279°)

TOWER 118.7 257.8 (Rwy 10L-28R) 123.775 251.125 (Rwy 03-21 and Rwy 10R-28L)

R DEP CON 124.35 299.2 (280°-099°) 118.1 284.6 (100°-279°) 127.85 290.3

ANG BASE OPS 281.2 (Portland Guard OPS/Guard Comd Post)

AIRSPACE: CLASS C svc ctc APP CON RADIO AIDS TO NAVIGATION: NOTAM FILE PDX.

BATTLE GROUND (H) VORTACW 116.6 BTG Chan 113 N45°44.87′ W122°35.49′ 160° 9.6 NM to fld. 253/21E.

(L) VORW/DME 111.8 PDX Chan 55 N45°35.62' W122°36.38' at fld. 23/20E.

VOR/DME unusable:

001°-024° 351°-001° bvd 20 NM blo 5.500'

025°-039° byd 30 NM 351°-001° byd 34 NM blo 6,500' 131°-230°

322°-351°

COLUMBIA (H) TACAN CBU (109.2) Chan 29 N45°35.32 W122°36.68' at fld. 22/20E.

LAKER NDB (MHW) 332 LBH N45°32.46′ W122°27.74′ 277° 6.4 NM to fld.

ILS/DME 111.3 I-VDG Chan 50 Rwy 10L. Class IT.

ILS 110.5 I-PDX Chan 42 Rwy 10R. Class IIIE. ILS 111.3 I-IAP Rwy 28R DME also serves Rwy 10L.

ILS/DME 108.9 I-GPO Chan 26 Rwv 21. LOC only. LOC unusable byd 25° rgt of course

ILS 110.5 I-JMJ Chan 42 Rwy 28L. Class IT. Coupled apchs not authorized blo 420' due to GS

reversal 0.9 NM fm Rwy 28L thld.

(TTD) 10 E UTC-8(-7DT) N45°32.96′ W122°24.08 R S4 FUEL 100LL, JET A OX 1 NOTAM FILE TTD RWY 07-25: H5399X150 (ASPH) S-19, D-25 MIRI

RWY 07: REIL. VASI(V4L)-GA 3.0° TCH 50'. Trees.

RWY 25: REIL, PAPI(P4L)-GA 3.0° TCH 47', Trees.

AIRPORT REMARKS: Attended 1500-0600Z‡. CAUTION: Migratory flocks

of waterfowl on and invof arpt. Portland Intl arpt (PDX) Rwy

10L-28R extended centerline crosses arpt, ATCT may issue restrictions due to PDX tfc. Ldg fee. Commercial acft and operators of acft with an FAA certified maximum gross Idg weight

that exceeds 10,000 lbs are required to pay a ldg fee. Rwy 25 PAPI is baffled 08° left and right of centerline. ACTIVATE MIRL Rwy 07-25-CTAF. Rwy 07 VASI and PAPI Rwy 25 opr continously.

WEATHER DATA SOURCES: ASOS 135.625 (503) 492-2887. COMMUNICATIONS: CTAF 120.9 ATIS 135.625 (503) 492-7634 UNICOM 122.95

R PORTLAND APP CON 124.35 (280°-099°) 118.1 (100°-279°) R PORTLAND DEP CON 124.35

TROUTDALE TOWER 120.9 (1500-0600Z±) **GND CON 121.8**

AIRSPACE: CLASS D svc 1500-0600Z‡ other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE PDX. BATTLE GROUND (H) VORTACW 116.6 BTG Chan 113 N45°44.87'

COMM/NAV/WEATHER REMARKS: Freq 121.5 not avbl at tower.

W122°35.49' 125° 14.4 NM to fld. 253/21E. LAKER NDB (MHW) 332 LBH N45°32.46′ W122°27.74′ 059° 2.6 NM to fld.

UTC-8(-7DT) N45°12.98' W122°35.41'

PORTLAND-MULINO

MULINO STATE (4S9)

S8 NOTAM FILE MMV

RWY 14-32: H3425X100 (ASPH) MIRL

RWY 14: PAPI(P2L)-GA 3.0° TCH 43'. Fence. Rgt tfc.

20 S

RWY 32: PAPI(P2L)-GA 3.0° TCH 33'.

AIRPORT REMARKS: Unattended. Be alert for weekend glider activity. Birds on and invof arpt. Rwy 14 designated calm wind rwy.

ACTIVATE MIRL Rwy 14-32, twy lgts, and windcone-CTAF. PAPI Rwy 14 and Rwy 32 operate 24 hrs.

COMMUNICATIONS: CTAF/UNICOM 123.05

PORTLAND CLNC DEL 119.95

RADIO AIDS TO NAVIGATION: NOTAM FILE MMV.

NEWBERG (H) VORW/DME 117.4 UBG Chan 121

W122°58 69'

095° 18.4 NM to fld. 1440/21E. HIWAS.

œ (3 3 00 a

€3

H-1B I-1C

IAP. AD

POWERS N42°52.17′ W124°03.56′ (6S6)1 SE UTC-8(-7DT)

KLAMATH FALLS

Œ C SFATTLE

I-1R

TPA-1326(1000) NOTAM FILE MMV RWY 13-31: 2500X60 (TURF)

RWY 13: Trees. RWY 31: Trees.

AIRPORT REMARKS: Unattended. Arpt in valley surrounded by high terrain. Livestock and wildlife on and invof arpt. COMMUNICATIONS: CTAF 122.9

KI AMATH FALLS

H-1B I-13A

ΙΔΡ

PRINEVILLE (S39) 3 SW UTC-8(-7DT) N44°17.22′ W120°54.23′ 3250 S4 R

FUEL 100LL, JET A NOTAM FILE MMV RWY 10-28: H5000X75 (ASPH) S-30 MIRL

RWY 10. Trees

RWY 28: PAPI(P4R)-GA 3.0° TCH 41'.

RWY 15-33: H4031X40 (ASPH) S-5 LIRL

RWY 33: Trees.

AIRPORT REMARKS: Attended Oct-Apr 1500-0100Z±, May-Sep 1500-0200Z‡. 24 hr card lock self-svc fuel avbl. Deer on and invof arpt. Rwy 15-33 limited by arpt operator to 5000 lbs max weight. ACTIVATE MIRL Rwy 10-28, PAPI Rwy 28, and LIRL Rwy

15-33-CTAF COMMUNICATIONS: CTAF/UNICOM 122.8

SEATTLE CENTER APP/DEP CON 128.15 RADIO AIDS TO NAVIGATION: NOTAM FILE RDM.

DESCHUTES (H) VORTACW 117.6 DSD Chan 123 N44°15.17'

W121°18.21' 065° 17.4 NM to fld. 4101/18E. HIWAS. RD N44°18.48'

BODEY NDB (HW/LOM) 411

W121°01.14' 086° 5.1 NM to fld. NDB unusable 091°-111° bvd 25 NM blo 14.000'.

PROSPECT STATE (64S) 1 S UTC-8(-7DT) N42°44.59′ W122°29.29′

2578 B TPA-3578(1000) NOTAM FILE MMV RWY 02-20: H4000X50 (ASPH)

RWY 02: Trees. RWY 20: Trees. AIRPORT REMARKS: Unattended. Irregular winter maintenance, arpt may

be clsd by snow. Trees obscure view of rotating bcn from southeast-southwest quadrants of arpt. 80'-100' trees within

200' of rwy centerline both sides of rwy. Turf tie down area rough. COMMUNICATIONS: CTAF/UNICOM 122.8


RADIO AIDS TO NAVIGATION: NOTAM FILE MFR.

ROGUE VALLEY (H) VORTACW 113.6 OED Chan 83 N42°28.77'

W122°54 78' 031° 24.6 NM to fld. 2083/19E. HIWAS.

G G

KLAMATH FALLS L-2J



PUMIE N42°27.06′ W122°54.80′. NOTAM FILE MFR.

NDB (LOM) 373 MF 140° 4.9 NM to Rogue Valley Intl. LOM unusable 260°-270° beyond 10NM.

REDMOND N44°15.25′ W121°09.15′

RCO 122.5 (MC MINNVILLE RADIO)

KLAMATH FALLS

KLAMATH FALLS L-13A

REDMOND

ROBERTS FLD (RDM) 1 SE UTC-8(-7DT) N44°15.24′ W121°09.00′ S4 FUEL 100LL, JET A. Class I, ARFF Index B. NOTAM FILE RDM

0.3% up SW

C C

n

KLAMATH FALLS

H-1B. L-13A

IAP. AD

RWY 04-22: H7038X150 (ASPH-GRVD) S-68, D-110, 2S-140, 2D-200 RWY 04: REIL. VASI(V4L)-GA 3.0° TCH 50'.

RWY 22: MALSR, PAPI(P4L)-GA 3.0° TCH 43'. RWY 10-28: H7006X100 (ASPH-GRVD) S-28, D-40

MIRL 0.5% up SE RWY 10: REIL. VASI(V4L)-GA 3.0° TCH 50'.

RWY 28: REIL. PAPI(P4L)-GA 3.0° TCH 50'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 04: TORA-7038 TODA-7038

ASDA-7038 LDA-7038 RWY 10: TORA-7006 TODA-7006 ASDA-7006 LDA-7006 RWY 22: TORA-7038 TODA-7038 ASDA-7038 LDA-7038 RWY 28: TORA-7006 TODA-7006 ASDA-7006 LDA-7006 AIRPORT REMARKS: Attended 1330Z‡-dusk. For fuel after hrs call 541-410-2938 or 541-480-0014. CLOSED to unscheduled air

carrier ops with more than 30 passenger seats except PPR call airport manager 541-548-0646 extension 3496. Acft in excess of SW 28 or DW 40 prohibited from landing or takeoff Rwy 10-28 except with PPR from airport manager when Rwy 04-22 is unavbl. Occasional wildlife on and in vicinity of arpt. Taxiway G restricted to acft 26,000 lbs or less. Taxiway B for forest syc use only, not avbl for use by air carrier acft with more than 30 passenger seats. Terminal apron not avbl for general aviation

acft. Helipad H1 private use only. When twr clsd ACTIVATE HIRL Rwy 04-22, MIRL Rwy 10-28, MALSR Rwy 22, REIL Rwy 04, Rwy 10 and Rwy 28 and twy Igts-CTAF. WEATHER DATA SOURCES: ASOS 119.025 (541) 504-8743.

COMMUNICATIONS: CTAF 124.5

ATIS 119.025 (541) 548-1742 **IINICOM** 122 95

REDMOND RCO 122.5 (MC MINNVILLE RADIO) SEATTLE CENTER APP/DEP CON 128.15

TOWER 124.5 (1400-0400Z‡) GND CON 121.8 AIRSPACE: CLASS D svc 1400-0400Z‡ other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE RDM.

DESCHUTES (H) VORTACW 117.6 DSD Chan 123 N44°15.17′ W121°18.21′ 071° 6.6 NM to fld. 4101/18E.

HIWAS.

BODEY NDB (HW/LOM) 411 RD N44°18.48′ W121°01.14′ 222° 6.5 NM to fld. IIS 109 1 I–RDM Class IF

LOM BODEY NDB Rwy 22. COMM/NAV/WEATHER REMARKS: ATC radar svc provided within 40 NM radius by Seattle Center to transponder equipped

acft only. RDM ATCT does not provide ATC radar svc. ROBERTS FLD (See REDMOND)

ROGUE VALLEY INTL-MEDFORD (See MEDFORD)

ROME N42°35.43′ W117°52.09′ NOTAM FILE REO

(H) VORTACW 112.5 REO Chan 72

at Rome State. 4050/19E. RC0 122.65 (BOISE RADIO)

KLAMATH FALLS H-3C, L-11B

limited by arpt operator to 8000 pounds single wheel gear. COMMUNICATIONS: CTAF 122.9 RC0 122.65 (BOISE RADIO) RADIO AIDS TO NAVIGATION: NOTAM FILE REO. (H) VORTACW 112.5 REO Chan 72

(REQ)

RWY 03-21: 6000X150 (GRVL)

TPA-5053(1000)

20 SW

W117°52.09' at fld. 4050/19E.

AIRPORT REMARKS: Unattended. Sage growing in primary sfc. Rwy 03-21 sagebrush growing on west portion of rwy. Rwy 03-21

(5S1) 3 W UTC-8(-7DT)

AIRPORT REMARKS: Attended 1600-0100Z±, Migratory flocks of

UTC-8(-7DT)

N42°35.43'

NOTAM FILE REO

ROME STATE

4053

N42°34.66′ W117°53.13′

N43°13.49′ W123°23.82′

N43°14.33′ W123°21.35′

MIRL 0.6% up NW

3333

000

GG GGG

á.C

135

KLAMATH FALLS

KIAMATH FALLS

KLAMATH FALLS

ପ୍ରପ୍ର

I _ 1 A

IAP

03

C3 C3

Ċ

KLAMATH FALLS

H-1B, L-1A

SEATTLE

L-1B

€3

ROSEBURG GEORGE FELT 428

NOTAM FILE MMV RWY 10-28: 2300X100 (TURF) RWY 28: Trees. Rgt tfc. RWY 10. Trees

AIRPORT REMARKS: Attended irregularly. Deer frequently on rwy. Migratory flocks of waterfowl on and in vicinity of arpt.

Soft earth off rwy and taxiway when wet. For noise abatement fly to river before turning. Monitor Roseburg Rgnl

CTAF/UNICOM for conflicting acft.

COMMUNICATIONS: CTAF 122.9

ROSEBURG RGNL (RBG)

1 NW UTC-8(-7DT) FUEL 100LL, JET A OX 1 NOTAM FILE RBG R S4

RWY 16-34: H4602X100 (ASPH) S-42, D-54, 2D-88 RWY 16: REIL. Thid dsplcd 700'. Pole. RWY 34: REIL. VASI(V2L)-GA 3.0° TCH 53'. Thid dspicd 371'. Tree.

waterfowl on and in vicinity of arpt. CAUTION advised. ACTIVATE MIRL Rwy 16-34 and REIL Rwy 16 and Rwy 34-CTAF. Rwy 34 VASI opr continuously. WEATHER DATA SOURCES: ASOS 135.475 (541) 673-1483. COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.55 (MC MINNVILLE RADIO) SEATTLE CENTER APP/DEP CON 121.4 RADIO AIDS TO NAVIGATION: NOTAM FILE RBG.

(L) VORW/DME 108.2 RBG Chan 19 W123°21.14' 337° 3.4 NM to fld. 1320/20E.

ROSEBURG N43°10.95′ W123°21.14′ (L) VORW/DME 108.2 RBG Chan 19 VOR unusable: 070°-130° beyond 20 NM below 8000' 130°-150° beyond 20 NM below 7000' 240°-290° beyond 25 NM below 5000'

RCO 122.55 (MC MINNVILLE RADIO) SALEM N44°55.14′ W123°00.54′ RCO 122.6 (Mc MINNVILLE RADIO)

NOTAM FILE RBG. 337° 3.4 NM to Roseburg Rgnl. 1320/20E.

N43°10.95′

DME unusable:

070°-130° beyond 20 NM below 8000'

130°-190° beyond 30 NM below 7000'

240°-320° beyond 25 NM below 5000'

34 G C3 Ğ Ç

SALEM

McNARY FLD

S4 FUEL 100LL JET A OX 1. 3 Class IV. ARFF Index A NOTAM FILE SLE RWY 13-31: H5811X150 (ASPH-GRVD) S-100, D-122, 2S-154, 2D-185 0.3% up SE

(SLE) 2 SE UTC-8(-7DT) N44°54.57′ W123°00.15′

RWY 13: ODALS. REIL. VASI(V4L)-GA 3.0° TCH 51'. Road.

RWY 31: MALSR. Tree. 33 RWY 16-34: H5145X100 (ASPH-GRVD) S-30, D-60, 2D-100

MIRL 0.3% up S RWY 16: REIL. PAPI(P4L)-GA 3.0° TCH 40'. Road.

RWY 34: REIL. PAPI(P4L)—GA 4.0° TCH 44'. Tree.

LAND AND HOLD SHORT OPERATIONS LANDING HOLD SHORT POINT DIST AVBL

RWY 31 16-34 3150 **RWY 34** 13-31 3050

AIRPORT REMARKS: Attended 1530Z‡-dusk. Self fueling (100LL only)

avbl 24 hrs a day. Jet A avbl after normal business hrs with

advanced notice at 503-508-4178 or 503-364-0111. CAUTION:

Rising terrain west of arpt. PPR for unscheduled air carrier ops with more than 30 passenger seats, call arpt manager on

503-588-6314. PPR required for parking acft on general aviation

ramp over 99,000 lbs call airport manager 503-588-6314. Bird hazard: Heavy concentration waterfowl adj to arpt and approaches to all rwys. Twy A from Twy L to L9 not visible from ATCT. Flocks of

When twr clsd ACTIVATE HIRL Rwy 13-31, MIRL Rwy 16-34, REILS Rwy 13, Rwy 16 and Rwy 34, MALSR Rwy 31 and ODALS Rwy 13-CTAF. WEATHER DATA SOURCES: ASOS (503) 371-1062.

COMMUNICATIONS: CTAF 119.1 ATIS 124 55 UNICOM 122.95

SALEM RCO 122.6 (MC MINNVILLE RADIO)

R SEATTLE CENTER APP/DEP CON 125.8 SALEM TOWER 119.1 (1500-0500Z±) **GND CON 121.9**

AIRSPACE: CLASS D svc 1500-0500Z‡ other times CLASS E.

(S48)

RADIO AIDS TO NAVIGATION: NOTAM FILE MMV.

NEWBERG (H) VORW/DME 117.4 UBG Chan 121 N45°21.19′ W122°58.69′ 161° 26.6 NM to fld.

3 S

1440/21E. HIWAS. TURNO NDB (LOM) 266 SI N44°50.85′ W122°57.06′ 330° 4.3 NM to fld. LOM unmonitored when twr clsd.

ILS/DME 110.3 I_SLF Chan 40 Rwy 31. LOM TURNO NDB. ILS and LOM unmonitored when tower

closed. Localizer back course unusable beyond 16 NM below 2,400'.

UTC-8(-7DT) N45°21.27′ W122°16.08′

Chan 113 N45°44.87′ W122°35.49′

SANDY COUNTRY SQUIRE AIRPARK

1175 NOTAM FILE MMV RWY 07-25: H3095X32 (ASPH)

COMMUNICATIONS: CTAF 122.9

RWY N7. Trees RWY 25: Trees. AIRPORT REMARKS: Attended irregularly. CAUTION: Watch for deer on and in vicinity of arpt. Sink hole located 75' N of

the AER 25. Rwy 07-25 loose gravel on surface, grass growing in cracks. Ldg fee. Overnight tiedown fee and landing fee for non based acft.

RADIO AIDS TO NAVIGATION: NOTAM FILE PDX.

BATTLE GROUND (H) VORTACW 116.6 BTG

253/21E.

SANDY RIVER (Ø3S) 1 NE UTC-8(-7DT) N45°24.10′ W122°13.72′

RWY 08-26: 2115X100 (TURF)

RWY N8: Trees RWY 26: Tree. AIRPORT REMARKS: Attended sunrise-sunset. Extensive ultralight activity on and in vicinity of arpt. Ultralight

FUEL 100LL TPA—See Remarks NOTAM FILE MMV

operations use right traffic and TPA-1304(600), do not land on turf adjacent to rwy. Rwy 08-26 not marked.

COMMUNICATIONS: CTAF/UNICOM 122.8

SEATTI E

IAP. AD

SEATTLE

SFATTI F

129° 27.3 NM to fld.

I = 1R

H-1B, L-1B

SEATTLE

IAP

H-1B.L-1C

KLAMATH FALLS

SANTIAM JUNCTION STATE (8S3) 0 S

UTC-8(-7DT) N44°26.07′ W121°56.54′ TPA-4780(1000) NOTAM FILE MMV 3780 RWY 06-24: 2800X150 (GRVL) RWY 06: Trees. RWY 24. Trees

AIRPORT REMARKS: Unattended. Arpt CLOSED Nov 1-May 1 or when covered by snow. Owner advises ctc with Department of Aviation 503-378-4880 prior to use. Land to east tkf to west. Arpt surrounded by trees and high terrain. Rwv 06-24 marked with white tires at corners. Rwv thIds marked with white tires at corners. State Highway Maintenance Station nearby. COMMUNICATIONS: CTAF 122.9

NW. 23 SEP 2010 to 18 NOV 2010

MIRI

0.5% up NW

SCAPPOOSE INDUSTRIAL AIRPARK (SPB) S4

1 NE UTC-8(-7DT) N45°46.26' W122°51.71' FUEL 100LL. JET A NOTAM FILE SPB RWY 15-33: H5100X100 (ASPH-RFSC) S-30, D-50, 2D-90

RWY 15: REIL. PAPI(P4R)—GA 3.73° TCH 41'. Tree. RWY 33: PAPI(P4L)-GA 3.0° TCH 40'. Rgt tfc.


AIRPORT REMARKS: Attended 1600Z‡-dusk. Extensive ultralight activity on west side parallel twy. PAPI Rwy 33 OTS indef. WEATHER DATA SOURCES: ASOS 135.875 (503) 543-6401.

COMMUNICATIONS: CTAF/UNICOM 122.8

R PORTLAND APP CON 124.35 R PORTLAND DEP CON 133.0 **CINC DEL** 121 65 RADIO AIDS TO NAVIGATION: NOTAM FILE PDX.

W122°35 49' 256° 11.4 NM to fld. 253/21E.

BATTLE GROUND (H) VORTACW 116.6 BTG Chan 113 N45°44.87' ILS/DME 111.1 I-FKO Chan 48 Rwy 15. LOC only, LOC unusable byd 20° west of course.



SEASIDE MUNI (56S) 1 NE UTC-8(-7DT) 12 TPA-1012(1000) NOTAM FILE MMV

RWY 16-34: H2211X50 (ASPH) S-12 LIRL RWY 16: Thid dspicd 155', Trees. RWY 34: Tree.

AIRPORT REMARKS: Unattended. Birds and elk on and in vicinity of rwy. COMMUNICATIONS: CTAF 122.9

SEXTON SUMMIT N42°36.00′ W123°22.04′/3838. STX

ASOS 118.375 541-471-1460

SEXTON SUMMIT N42°35 99' W123°22 04' RCO 122.5 (MC MINNVILLE RADIO)

SILETZ BAY STATE (See GLENEDEN BEACH)

SILVER LAKE F S STRIP (45S) 3 SW UTC-8(-7DT) N43°06.66' W121°05.65'

NOTAM FILE MMV RWY 03-21: 3000X55 (GRVL-DIRT) RWY 03: Fence. RWY 21: Fence.

AIRPORT REMARKS: Unattended. Rwy soft when wet, call 541-576-7520 for current conditions. Rwy 03 outlined with

white tires. Rwy 03-21 has fence post at each end of rwy painted orange and white. Rwy 03-21 weed growth and sage throughout primary sfc. COMMUNICATIONS: CTAF 122.9

N46°00.90' W123°54.46'

SFATTLE

KLAMATH FALLS

KLAMATH FALLS

L-2J

KLAMATH FALLS

L-2J

RWY 02-20: H3550X30 (ASPH) RWY 02: Thid dsplcd 340' Tree. AIRPORT REMARKS: Unattended. Deer on and invof arpt. Rising terrain off departure end of Rwy 02. Check density altitude/acft

RADIO AIDS TO NAVIGATION: NOTAM FILE RDM.

DESCHUTES (H) VORTACW 117.6 DSD Chan 123 N44°15.17' W121°18.21' 269° 10.6 NM to fld. 4101/18E. HIWAS.

NOTAM FILE MMV

SISTERS EAGLE AIR (6K5)

COMMUNICATIONS: CTAF 122.9

3168

S-4RWY 20. Trees

1 N UTC-8(-7DT) N44°18.27′ W121°32.35′

performance prior to tkf. Avoid overflights of homes to northeast. Pilots may consider a departure climb over meadow approximately

45° to the left of the departure end of Rwy 02. Rwy 02-20 numbers and centerline smaller than std. Landing fee.

€3

n

KLAMATH FALLS

ß Δ

I-1R

SKYPORT (See CORNELIUS)

SPORTSMAN AIRPARK

SOUTHWEST OREGON RGNL (See NORTH BEND)

STARK'S TWIN OAKS AIRPARK (See HILLSBORO)

SUNRIVER (S21) 1 W UTC-8(-7DT) N43°52.58′ W121°27.18′

FUEL 100LL, JET A, A+ TPA-5164(1000) NOTAM FILE MMV

RWY 18-36: H5455X75 (ASPH) S-30 LIRL

RWY 18: VASI(V2L)-GA 3.5° TCH 22'. Thid dsplcd 988'. Tree. Rgt

RWY 36: Trees. AIRPORT REMARKS: Attended 1 Apr-15 May 1630-0100Z±. 16 May-15

(See NEWBERG)

Jun 1600-0200Z‡, 16 June-15 Sep 1600-0200Z‡, 16 Sep-15 Oct 1600-0130Z‡, 16 Oct-30 Nov 1600-0100Z‡, 1 Dec-31 Mar 1630-0030Z‡. After hrs fuel call 541-593-4603 for insructions or call after hrs emergency 541-480-1688. Flocks of waterfowl

invof arpt. For fuel after hrs phone 541-593-1000. For noise abatement departing acft are urged to climb west of arpt prior to

turning on course. ACTIVATE LIRL Rwy 18-36 and VASI Rwy 18—CTAF COMMUNICATIONS: CTAF/UNICOM 122.8 RCO 122.3 (MC MINNVILLE RADIO)

SEATTLE CENTER APP/DEP CON 128.15

RADIO AIDS TO NAVIGATION: NOTAM FILE RDM. DESCHUTES (H) VORTACW 117.6

W121°18.21′

DSD Chan 123 N44°15.17'

178° 23.5 NM to fld. 4101/18E. HIWAS.

KLAMATH FALLS H-1B, L-1A, 11A IAP

THE DALLES N45°42.82' W121°06.06' RCO 122.65 (SEATTLE RADIO)

SEATTLE L-13A

THE DALLES

COLUMBIA GORGE RGNL/THE DALLES MUNI (DLS) 2 NE UTC-8(-7DT) N45°37.11′ W121°10.04′

S4 FUEL 100LL, JET A1 NOTAM FILE DLS

RWY 12-30: H5097X100 (ASPH) S-30, D-30 0.6% up SF RWY 12: Thid dsplcd 200'. Trees. RWY 30: REIL.

0.7% up E

RWY 07: Thid dspicd 440'. Trees.

RWY 07-25: H4647X100 (ASPH) S-30, D-30 MIRL

RWY 25: Thid dspicd 196'. AIRPORT REMARKS: Attended 1600-0200Z‡, Waterfowl on and inovf

arpt. PPR for overweight ldgs. Mtns byd 5000' approach Rwy 30. Arpt physically located in state of Washington, ACTIVATE MIRL Rwy

12-30. Rwv 07-25 and REIL Rwv 30-CTAF.

WEATHER DATA SOURCES: ASOS 135.175 (509) 767-1726. COMMUNICATIONS: CTAF/UNICOM 123.0

THE DALLES RCO 122.65 (SEATTLE RADIO) SEATTLE CENTER APP/DEP CON 119.65

RADIO AIDS TO NAVIGATION: NOTAM FILE DLS. KLICKITAT (H) VORW/DME 112.3 LTJ Chan 70

185° 6.4 NM to fld. 3220/21E. W121°06.05′

HIWAS ILS/DME 109.35 I-DLS Chan 30(Y) unusable byd 33° right of course.

RWY 13-31: H5001X100 (ASPH)

TILLAMOOK

continuously.

(TMK) 3 S UTC-8(-7DT) N45°25.10' W123°48.86' FUEL 100LL, JET A NOTAM FILE TMK

N45°42 81

LOC

MIRL

Rwy 25.

S-60, D-75, 2D-125

RWY 13: REIL, PAPI(P2L)—GA 3.0°, TCH 40', Fence. RWY 31: PAPI(P2L)-GA 3.5° TCH 40'. Brush.

RWY 01-19: H2910X75 (ASPH) S-40, D-46, 2D-67 MIRI RWY 01: PAPI(P2L)-GA 4.0° TCH 45'. Fence.

RWY 19: PAPI(P2L)-GA 3.0° TCH 40'. Rgt tfc. AIRPORT REMARKS: Attended 1700-0100Z‡. Rwy 13 REIL out of svc

indefinitely. Ultralight acft on and invof arpt. Occasional flocks of birds on or near arpt. ACTIVATE MIRL Rwy 13-31 and Rwy 01-19-CTAF. PAPI Rwy 13, Rwy 31, Rwy 01, and Rwy 19 opr

WEATHER DATA SOURCES: AWOS-3 120.0 (503) 842-8792. COMMUNICATIONS: CTAF/UNICOM 122.8 SEATTLE APP/DEP CON 124.2.

RADIO AIDS TO NAVIGATION: NOTAM FILE MMV.

NEWBERG (H) VORW/DME 117.4 UBG Chan 121 N45°21.19'

W122°58.69' 256° 35.6 NM to fld. 1440/21E. HIWAS.

TOKETEE STATE (See CLEARWATER)

TOLEDO STATE (5S4)1 SW UTC-8(-7DT) TPA-1007(1000)

RWY 13-31: H1750X40 (ASPH) RWY 13: Trees.

RWY 31: Trees.

AIRPORT REMARKS: Unattended. Numerous deer and waterfowl invof of arpt. Owner advises contact with Department

of Aviation 503-378-4880 prior to use. Trees in transition area. Rwy 13 has 120' trees near centerline, curve

apch path from over water. Unpaved ramp and twy. COMMUNICATIONS: CTAF 122.9

TURNO N44°50.85′ W122°57.06′. NOTAM FILE SLE.

NOTAM FILE MMV

NDB (LOM) 266 SL 330° 4.3 NM to McNary Fld. LOM unmonitored when twr clsd.

CO CO ß 4647 X 100

SEATTLE.

SFATTLE

IAP

H-1B. L-13A

H-1B. L-1C 0.4% up SE IAP 61 (a) O.C 0,00 ഹ്ദ്ദ

SEATTLE

SEATTLE

N44°36.06′ W123°56.37′

VAIF

MILLER MEMORIAL AIRPARK (S49) 1 SW UTC-7(-6DT) N43°57.83′ W117°15.56′

2249 B NOTAM FILE MMV RWY 18-36: 3872X65 (GRVL)

RWY 18: Thid dspicd 880'. Road.

RWY 10-28: 2100X40 (GRVL) RWY 10: Berm. RWY 28: Brush.

AIRPORT REMARKS: Unattended. Rwy 36 has very rough gravel extension. Rwy 18-36 marked by rwy lgts atop yellow cones. Dsplcd thld marked with standard thld Igts each side. Dsplcd sections marked with red Igts atop yellow cones. ACTIVATE LIRL Rwv 18-36-CTAF.

UTC-8(-7DT) N45°51.16' W123°14.56'

RWY 36: Thid dsplcd 125'. Brush.

COMMUNICATIONS: CTAF 122.9

VALLEY VIEW (See ESTACADA)

VANCOUVER N45°41.92' W122°55.52'.

RCO 122.35 (SEATTLE RADIO)

VERNONIA MUNI (Ø5S) 2 W NOTAM FILE MMV

> RWY 09-27: 2940X45 (TURF) RWY 09: Trees. Rgt tfc. RWY 27. Hill

AIRPORT REMARKS: Unattended. Hangars 100' right of centerline on AER 27. **COMMUNICATIONS: CTAF 122.9**

WAKONDA BEACH STATE (See WALDPORT)

WALDPORT

WAKONDA BEACH STATE (R33) 3 S UTC-8(-7DT) N44°23.07′ W124°05.11′

TPA-1041(1000) NOTAM FILE MMV

RWY 16-34: 2000X30 (TURF)

RWY 16: Trees. RWY 34: Trees.

AIRPORT REMARKS: Unattended. Owner advises contact Oregon Dept of Aviation 503-378-4880 prior to use. Ldg to the south and tkf to the north not recommended. Rwy 34 curve apch from SW to avoid high terrain and trees right at 800'. Rwy 34 has rising terrain and ditch 7' wide and 2' deep at 25' from thld. Rwy 16-34 white tires mark rwy ends. Rwy 16 has a road, +30' trees, and a p-line across the approach path within 110 ft of rwy end.

WASCO STATE (35S) UTC-8(-7DT) N45°35.37′ W120°40.45′ 1 E

B TPA-2503(1000) NOTAM FILE MMV 1503 RWY 07-25: H3450X60 (ASPH) S-12.5 MIRL

RWY 25: Rgt tfc.

COMMUNICATIONS: CTAF 122.9

Spring and Summer. ACTIVATE MIRL Rwy 07-25-CTAF.

COMMUNICATIONS: CTAF 122.9


AIRPORT REMARKS: Unattended, Extensive AG-sprayer ops. during

RADIO AIDS TO NAVIGATION: NOTAM FILE DLS.

KLICKITAT (H) VORW/DME 112.3 LTJ

Chan 70 N45°42.81' W121°06.05′ 091° 19.4 NM to fld. 3220/21E.

HIWAS.



KLAMATH FALLS

SEATTLE

SEATTLE

KLAMATH FALLS

KLAMATH FALLS

L-1C

WILDHORSE N43°35.59′ W118°57.30′. NOTAM FILE BNO.

(L) VORW/DME 113.8 ILR Chan 85 at Burns Muni. 4140/18E.

L-11A

2010 U.S. & CANADIAN MILITARY AERIAL AIRCRAFT/PARACHUTE DEMONSTRATIONS

During calendar year 2010, the U.S. and Canadian Military Aerial Demonstration Teams (Thunderbirds, Blue Angels, Snowbirds, and Golden Knights) will be performing on the dates and locations listed below.

Pilots should expect Temporary Flight Restrictions (TFR) in accordance with 14 CFR Section 91.145, Management of aircraft operations in the vicinity of aerial demonstrations and major sporting events. The dimensions and effective times of the TFRs may vary based upon the specific aerial demonstration event and will be issued via the U.S. NOTAM system. Pilots are strongly encouraged to check FDC NOTAMs to verify they have the most current information regarding these airspace restrictions.

The currently scheduled 2010 aerial demonstration locations, subject to change without notice, are:

ı	DATE:		USAF Thunderbirds	USN Blue Angels	USA Golden Knights	Canadian Snowbirds
	September	25-26		MCAS Kaneohe		
			McConnell AFB, KS	Bay, HI		Chico, CA
					•	
	October	1-3		MCAS Miramar, CA		MCAS Miramar, CA
		2-3	Salinas, CA		MCAS Miramar, CA	
		2-3			Jackson, MS	
		9-10	Little Rock AFB, AR	San Francisco, CA	Little Rock, AFB, AR	Daytona Beach, FL
ı		16-17	El Paso, TX	Dobbins AFB, GA	El Paso, TX	Atlanta, GA
•		23-24		NAS Jacksonville,		
			Houston, TX	FL	Washington, DC	
		30-31		Ft Worth Alliance,	Ft Worth Alliance,	
			Cocoa Beach, FL	TX	TX	
	November	6-7	Lackland AFB, TX	Homestead ARB, FL	Lackland AFB, TX	
		6-7			Homestead ARB, FL	
		11-14			Ft Bragg, NC	
		12-13		NAS Pensacola, FL		
		13-14	Nellis AFB, NV			
					•	

Note: Dates and locations are scheduled "show dates" only and do not reflect arrival or practice date TFR periods that may precede the specific aerial demonstration events listed above. Again, pilots are strongly encouraged to check FDC NOTAMs to verify they have the most current information regarding any airspace restrictions.

VFR ADVISORY AREA Canadian Airspace VICTORIA-VANCOUVER (Effective: Until Further Notice)

VICTORIA-VANCOUVER

(Effective: Until Further Notice)

Effective 0901 UTC August 6, 1994, a VFR Advisory Area was permanently established between the two Canadian control

zones, from above 1,200' MSL up to 2,500' MSL. Vancouver and Victoria Towers provide radar traffic information to all

PROCEDURES

Victoria/Vancouver

- *All aircraft operating between Victoria and Vancouver within the VFR Advisory Area should follow the routes shown on the graphic.
 - *Northbound: Change from Victoria Tower, 119.1, to Vancouver Tower, 124.0, when instructed by ATC.
 - *Southbound: Change from Vancouver Tower, 124.0, to Victoria Tower, 119.1, when instructed by ATC.
 - *Set transponder codes as requested.

participating aircraft within the VFR Advisory Area.

" NOI CIIDOUIIU:

TRANSITING TRAFFIC

- *Call Vancouver Tower on 124.0 when north of the Active Pass/Samuel Island Line.
- *Call Victoria Tower on 119.1 when south of the Active Pass/Samuel Island Line.
- *Set Transponder codes as requested.

 Routes and recommended altitudes will not be useable by all aircraft at all times because of weather and regulations pertaining to flight over water. Higher altitudes may be requested. If unable to maintain VFR, advice ATC.

Helena, Montana Controlled firing occurs in the vicinity of the Helena, Montana VORTAC (HLN) 24 hours daily, 5'800 MSL and BELOW. The area defined by the following radial/DME coordinates HLN258008, HLN258005, HLN250008, HLN250005. CONTROLLED FIRING

CONTROLLED FIRING Fort Harrison Controlled Firing Area

Limestone Hills Controlled Firing Area Helena, Montana

Controlled firing occurs in the vicinity of the Helena, Montana VORTAC (HLN) 24 hours daily, FL180 and BELOW. The area defined by the following radial/DME coordinates HLN125026, HLN127028, HLN140025, HLN125028.

SPECIAL NORTH ATLANTIC, CARIBBEAN AND

PACIFIC AREA COMMUNICATIONS

VHF air-to-air frequencies enable aircraft engaged in flights over remote and oceanic areas out of range of VHF ground stations to exchange necessary operational information and to facilitate the resolution of operational problems.

Frequencies have been designated as follows: North Atlantic area:

123.45 MHz Caribbean area: 123.45 MHz Pacific area: 123.45 MHz

MOUNT ST. HELENS NATIONAL VOLCANIC MONUMENT, WASHINGTON

The U.S. Geological Survey (USGS) and the U.S. Forest Service (USFS) conduct low level flights to and from monitor

station within the monument and within the crater itself. Due to this activity, the volatility of the volcano and a high volume

of sightseeing flights in the area, the following procedures are recommended in the interest of flying safety.

1. VFR aircraft are encouraged to transmit an initial position report on 122.75 MHz in the blind when flying at altitudes of less than 10,000 feet MSL within 10 nautical miles of the Mount St. Helens volcano crater.

3. VFR flight above 3000 feet AGL - fly a counterclockwise pattern, no closer than 3 miles to the volcano summit. VFR rules of "see and be seen" and good airmanship practices will prevail. Approval to land can only be obtained through appropriate Federal or State authority. Any significant information will be broadcast on the transcribed weather broadcasts by the Seattle and McMinnville Flight Service Stations and available on the Portland and Seattle ATIS. Marginal radar

2. VFR flight below 3000 feet AGL - strongly not recommended.

November to May. Caution advised at all airports or while transiting area.

Monument.

DEVILS TOWER NATIONAL MONUMENT. WYOMING For reasons of national welfare, pilots are requested to avoid flights within 3 nautical miles of Devils Tower National

coverage limits Seattle Center's ability to provide radar flight following to aircraft in orbit of the volcano.

BIRD HAZARD OREGON AND WASHINGTON

Heavy concentration of migratory and wintering flocks of large waterfowl from the Canadian to California borders annually

SIMULTANEOUS OPERATIONS Boeing Field/King County International Airport

Seattle, Washington All users: Boeing Field Airport Traffic Control Tower is authorized to conduct simultaneous same direction operations to

Application of visual separation for simultaneous operations. When weather conditions at Spokane International Airport are 1500' ceiling and 5 miles visibility or greater Spokane International Airport controllers may provide visual separation of

parallel runways, between sunrise and sunset, for Category II aircraft and smaller. **Spokane International Airport** Spokane, Washington

and 500 feet laterally of the light source. Cockpit illumination-flash blindness may occur beyond these distances.

aircraft landing and departing simultaneously at Spokane International Airport and Fairchild Airforce Base. LASER LIGHT DEMONSTRATIONS

Bozeman, Montana A laser light demonstration will be conducted daily between 0000 and 2359 MDT until June 24, 2011 at Montana State

University BZN VORTAC 129 radial at 8 NM LAT 45-39-59N/Long 111-02-44W. The laser beam elevation will be a maximum of 090 and a minimum of 089. The beam may be injurious to eyes when viewed within 12000 feet AGL vertically

SPECIAL NOTICES

SEATTLE-TACOMA INTL SEATTLE. WASHINGTON

During peak departure periods, gatehold procedures are implemented for all IFR departures. Additional information will be broadcast on ATIS.

Gatehold Procedures:

Oceanic Departures:

1. Contact Clearance Delivery only when you will be ready to taxi within ten minutes. State destination, requested altitude, "ten minutes to taxi."

2. If ATC delays are more than 15 minutes for your filed altitude/route, alternatives with less delay will be offered. 3. Failure to depart the gate within ten minutes or reach the runway at the release time specified in the IFR clearance may

result in the cancellation of your clearance.

for military users.

MOUNTAIN HOME, IDAHO

All aircraft operating within 20 NM of the Liberator VOR are requested to contact Mountain Home APP CON on 124.8 for traffic advisory due to intensive military training in the Mountain Home area.

MILITARY TRAINING ROUTES to policy and procedures for IRs and VRs is published in FAA Handbook 7610.4 (Special Military Operations) which is

The DOD Flight Information Publication AP/1B provides textual and graphic descriptions and operating instructions for all military training routes (IR, VR, SR) and refueling tracks/anchors. Complete and more comprehensive information relative

CIVIL USE OF MILITARY FIELDS:

agreed to by the DOD and therefore directive for all military flight operations. The AP/1B is the official source of route data

U.S. Army, Air Force, Navy and Coast Guard Fields are open to civil fliers only in emergency or with prior permission.

Army installations, prior permission is required from the Commanding Officer of the installation. For Air Force installations, prior permission should be requested at least 30 days prior to first intended landing from

rights for certain categories of civil aircraft). For use of more than one Air Force installation, requests should be forwarded

either Headquarters USAF (PRPOC) or the Commander of the installation concerned (who has authority to approve landing

direct to Hq USAF (PRPOC), Washington, D.C. 20330. Use of USAF installations must be specifically justified.

For Navy and Marine Corps installations, prior permission should be requested at least 30 days prior to first intended

landing. An Aviation Facility License must be approved and executed by the Navy prior to any landing by civil aircraft.

Forms and further information may be obtained from the nearest U.S. Navy or Marine Corps aviation activity.

For Coast Guard fields prior permission should be requested from the Commandant, U.S. Coast Guard via the

Commanding Officer of the field. When instrument approaches are conducted by civil aircraft at military airports, they shall be conducted in accordance

AIRCRAFT LANDING RESTRICTIONS

with the procedures and minimums approved by the military agency having jurisdiction over the airport.

Landing of aircraft at locations other than public use airports may be a violation of Federal or local law. All land and water areas are owned or controlled by private individuals or organizations, states, cities, local governments, or U.S. Government

agencies. Except in emergency, prior permission should be obtained before landing at any location that is not a designated

public use airport or seaplane base.

Landing of aircraft is prohibited on lands or water administered by the National Park Service, U.S. Fish and Wildlife

Service, U.S. Forest Service, and on many areas controlled by the U.S. Army Corps of Engineers, unless prior authorization is obtained from the respective agency.

CONTINUOUS POWER FACILITIES In order to insure that a basic ATC system remains in operation despite an areawide or catastrophic commercial power

failure, key equipment and certain airports have been designated to provide a network of facilities whose operational capability can be utilized independent of any commercial power supply. In addition to those facilities comprising the basic ATC system, the following approach and lighting aids have been

included in this program for a selected runway.

- 1. ILS (Localizer, Glide Slope, COMLO, Inner, Middle and Outer Markers)

 - 2. Wind Measuring Capability

 - 3. Approach Light System (ALS) or Short ALS (SALS)

 - 4. Ceiling Measuring Capability
 - 5. Touchdown Zone Lighting (TDZL)
 - 6. Centerline Lighting (CL)
- 7. Runway Visual Range (RVR)

Indianapolis, IN (IND)

Jacksonville, FL (JAX).....

Kansas City, MO (MCI).....

05L

07

19R

, , , , , , , , , , , , , , , , , , , ,			
8. High Intensity Runway Lighting (H	IRL)		
9. Taxiway Lighting			
10. Apron Light (Perimeter Only)			
The following have been designated	"Continuous Power	Airports," and have independent back	up capability for the
quipment installed.			
Airport/Ident	Runway No.	Airport/Ident	Runway No.
Albuquerque, NM (ABQ)	08	Milwaukee, WI (MKE)	01L
Andrews AFB, MD (ADW)	01L	Minneapolis, MN (MSP)	30L
Anchorage, AK (ANC)	07R	Nashville, TN (BNA)	02L
Atlanta, GA (ATL)	09R	New Orleans, LA (MSY)	10
Baltimore, MD (BWI)	10	New York, NY (JFK)	04R
Bismarck, ND (BIS)	31	New York, NY (LGA)	22
Boise, ID (BOI)	10R	Newark, NJ (EWR)	04R
Boston, MA (BOS)	04R	Oklahoma City, OK (OKC)	35R
Charlotte, NC (CLT)	36L	Omaha, NE (OMA))	14R
Chicago, IL (ORD)	10	Ontario, CA (ONT)	26L
Cincinnati, OH (CVG)	36C	Philadelphia, PA (PHL)	09R
Cleveland, OH (CLE)	06R	Phoenix, AZ (PHX)	08
Dallas/Fort Worth, TX (DFW)	17C	Pittsburgh, PA (PIT)	10L
Denver, CO (DEN)	35R	Reno, NV (RNO)	16R
Des Moines, IA (DSM)	31	Salt Lake City, UT (SLC)	34L
Detroit, MI (DTW)	03R	San Antonio, TX (SAT)	12R
El Paso, TX (ELP)	22	San Diego, CA (SAN)	09
Fairbanks, AK (FAI)	01L	San Francisco, CA (SFO)	28R
Great Falls, MT (GTF)	03	San Juan, PR (SJU)	08
Honolulu, HI (HNL)	08L	Seattle, WA (SEA)	16C
Houston, TX (IAH)	26L	St. Louis, MO (STL)	30R

24R Los Angeles, CA (LAX)..... Washington, DC (IAD) 01R Memphis, TN (MEM)..... 36L Wichita, KS (ICT)..... 01L Miami, FL (MIA)..... NOTE—The existing CPA runway is listed. Pending and future changes at some locations will require a revised runway designation.

Tampa, FL (TPA)

Tulsa, OK (TUL)..... Washington, DC (DCA) 36L 36R

01

Night Vision Lights Out Operations

Yakima Training Center, Washington

YTC reservation but outside of the restricted airspace. The general description of the night vision goggle (NVG) training area is that airspace bordered by R-6714H on the south, Highline Canal on the west, the southern edge of Interstate 90 on the

Military helicopter activity will be conducted for night vision lights out training at Yakima Training Center, Washington. Position lights will be extinguished or greatly reduced in intensity. The training will be conducted within the confines of the

north, and Ginko State Park Petified Forest on the east. The boundaries of the NVG area are:

Beginning at lat. 46°55'03"N, long. 120°01'34"W: to lat. 46°55'40"N, long. 120°01'35"W;

to lat. 46°55'39"N, long. 120°02'52"W; to lat. 46°56'15"N, long. 120°02'52"W thence west along the southern edge of Interstate 90;

to lat. 46°57'21"N, long. 120°18'08"W;

thence west/southwest along the Highline Canal;

to lat. 46°55'24"N, long. 120°19'55"W; to point of beginning.

Times of use: Sunset to sunrise, daily.

Request Publication date of May 22, 1997.

NOTAM information.


Please refer any questions to James Riley, ANM-532.2, at (206) 227-2537.

LIGHTS-OUT OPERATIONS

Hays MOA, Montana

Lights-out night vision goggle training operations conducted within the Hays MOA at all altitudes from sunset to sunrise when MOA is active by NOTAM. Contact Salt Lake City ARTCC on 133.4 or 119.75 or Great Falls FSS for schedule and

FIREFIGHTING TRAFFIC AREAS

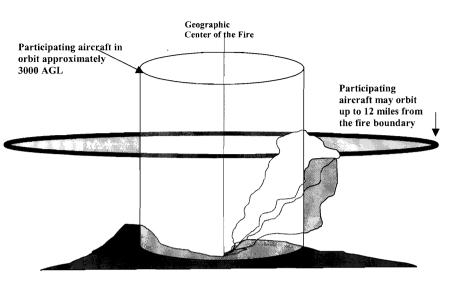

Pilots are advised to stay clear of Firefighting Traffic Areas. Remain 15 miles from the area of activity. If you must over-fly the area, do so at an altitude of 5000 feet AGL above. However, to remain safe and out of the way of working aircraft, it is best to circumnavigate the area.

The wild-land fire environment can be very complex and involve a large number and variety of aircraft types including fixed and rotary wing aircraft. Some of the aircraft are small single and multi-engine command and control platforms that can be especially difficult to see and may give the appearance that the fire is not staffed. The aircraft participating in firefighting can orbit as far out as 12 miles from the perimeter of the fire. Any intrusion by aircraft not directly involved in the firefighting operation could delay the delivery of much needed retardant or water to ground firefighters and will adversely affect the safety of participating aircraft. Please stay well away from wild-land fires even if you feel that aircraft are not working the fire; they may be en route or unseen.

If you see a fire developing along your route, report it immediately to air traffic control who will advise the US Forest Service. The firefighting community would welcome this information.

REGULATORY NOTICES

The following narratives summarize the FAR Part 93 Special Air Traffic Rules, and Airport Traffic Patterns in effect as prescribed in the rule. This information is advisory in nature and in no way relieves the pilot from compliance with the specific rules set forth in FAR Parts 91 and 93.

Special Airport Traffic Areas prescribed in Part 93 are depicted on Sectional Aeronautical Charts, World Aeronautical Charts, Enroute Low Altitude Charts, and where applicable, on VFR Terminal Area Charts.

OPERATIONS RESERVATIONS FOR HIGH DENSITY TRAFFIC AIRPORTS KENNEDY, LAGUARDIA, AND WASHINGTON REAGAN NATIONAL

The Federal Aviation Administration (FAA) has designated New York's Kennedy and LaGuardia Airports and Washington Reagan National Airport as High Density Traffic Airports (HDTA), Title 14, Code of Federal Regulations, part 93, subpart K, and has prescribed air traffic rules and requirements for operating aircraft (excluding helicopters) to and from those airports during certain hours.

Reservations are required for operations from 6 a.m. through 11:59 p.m. local time at LaGuardia Airport and Washington Reagan National Airport. Reservations at Kennedy Airport are required from 3 p.m. through 7:59 p.m. local time.

Reservation procedures are detailed in Advisory Circular 93–1, Reservations for Unscheduled Operations at High Density Traffic Airports. A copy of the advisory circular is available on the FAA website at http://www.faa.gov. Reservations for unscheduled operations are allocated through the Enhanced Computer Voice Reservation System (e–CVRS) accessible via telephone or the Internet. This system may not be used to make reservations for scheduled air carrier or commuter flights.

The toll–free telephone number for accessing e–CVRS is 1–800–875–9694 and is available for calls originating within the United States, Canada, and the Caribbean. Users outside the toll–free areas may access e–CVRS by calling the toll number of 703–707–0568. The Internet web address for accessing the e–CVRS is http://www.fly.faa.gov/ecvrs. If you have any questions about reservation requirements or are experiencing problems with the system, you may telephone the Airport Reservation Office at the Air Traffic Control System Command Center at (703) 904–4452.

Requests for instrument flight rules (IFR) reservations will be accepted beginning 72 hours prior to the proposed time of operation at the high–density airport. For example, a request for an 11 a.m. reservation on a Thursday will be accepted beginning at 11 a.m. on the previous Monday.

IFR reservations must be obtained prior to IFR landing or takeoff at an HDTA during slot controlled hours. An air traffic control (ATC) clearance does not constitute a reservation. A reservation does not constitute permission to operate at an HDTA if additional operational limits or procedures are required by NOTAM and/or regulation.

Aircraft involved in medical emergencies will be handled by ATC without regard to a reservation after obtaining prior approval of the ATC System Command Center on (703) 904–4452. ATC will accommodate declared other emergency situations without regard to slot reservations.

NOTE: Visual flight rule (VFR) reservations via ATC for unscheduled operations at LaGuardia are not authorized from 7 a.m. through 8:59 a.m. local time and 4 p.m. through 6:59 p.m. local time, Monday through Friday and Sunday evenings, unless otherwise announced by NOTAM. Both IFR and VFR operations during those time periods must obtain an advance reservation through e–CVRS.

FAA AND NWS 227

FSS TELEPHONE NUMBERS

Flight Service Station (FSS) facilities provide flight planning and weather briefing services to pilots. FSS services in the

remote facilities some of which operate part-time. Because of the interconnectivity between the facilities, all FSS services including radio frequencies are available continuously using published data.

contiguous United States, Hawaii and Puerto Rico, are provided by a network of large FSS facilities and a few select

Telephone Information Briefing Service (TIBS) is a FSS service that provides continuous recordings of meteorological and/or aeronautical information. A touch-tone telephone is required to fully utilize this service.

Further information can be found in the Aeronautical Information Manual (AIM).

NATIONAL FSS TELEPHONE NUMBER

Pilot Weather Briefings

OTHER FSS TELEPHONE NUMBERS (except in Alaska)

* District of Columbia Special Flight Rules Area & Flight Restricted Zone

228 FAA AND NWS

KEY to AERODROME FORECAST (TAF) and AVIATION ROUTINE WEATHER REPORT (METAR)

TAF KPIT 091730Z 091818 15005KT 5SM HZ.FEW020 WS010/31022KT
FM1930 30015G25KT 3SM SHRA OVC015 TEMPO 2022 1/2SM +TSRA
OVC008CB
FM0100 27008KT 5SM SHRA BKN020 OVC040 PROB40 0407 1SM -RA BR
FM1015 18005KT 6SM -SHRA OVC020 BECMG 1315 P6SM NSW SKC

METAR KPIT 091955Z COR 22015G25KT 3/4SM R28L/2600FT TSRA OVC010CB
18/16 A2992 RMK SLP045 T01820159

Forecast

Explanation

Report

TAF

Message type: TAF-routine or TAF AMD-amended forecast, METAR-hourly, SPECI-special or TESTM-non-commissioned ASOS report

ICAO location indicator

ISSUANCE time: ALL times in UTC "Z", 2-digit date, 4-digit time
Valid period: 2-digit date, 2-digit beginning, 2-digit ending times
In U.S. METAR: CORrected ob; or AUTOmated ob for automated report with no human intervention; omitted when observer logs on

Wind: 3 digit true-north direction, nearest 10 degrees (or VaRiaBle); next 2-3 digits for speed and unit, KT (KMH or MPS); as needed, Gust and maximum speed; 00000KT for calm; for METAR, if direction varies 60 degrees or more, Variability appended, e.g. 180V260

	hourly, SPECI-special or TESTM-non-commissioned ASOS report	
KPIT	ICAO location indicator	KPIT
091730Z	Issuance time: ALL times in UTC "Z", 2-digit date, 4-digit time	091955Z
091818	Valid period: 2-digit date, 2-digit beginning, 2-digit ending times	
	In U.S. METAR : <u>COR</u> rected ob; or <u>AUTO</u> mated ob for automated report with no human intervention; omitted when observer logs on	COR
15005KT	Wind: 3 digit true-north direction, nearest 10 degrees (or VaRiaBle); next 2-3 digits for speed and unit, KT (KMH or MPS); as needed, Gust and maximum speed; 00000KT for calm; for METAR, if direction varies 60 degrees or more, Variability appended, e.g. 180V260	22015G25KT
5SM	Prevailing visibility: in U.S., <u>Statute Miles & fractions</u> ; above 6 miles in TAF <u>Plus6SM</u> . (Or, 4-digit minimum visibility in meters and as required, lowest value with direction)	3/4SM
	Runway Visual Range: <u>R;</u> 2-digit runway designator <u>Left, Center,</u> or <u>Right</u> as needed; "/"; <u>Minus or Plus in U.S., 4-digit value, FeeT</u> in U.S., (usually meters elsewhere); 4-digit value <u>Variability 4-digit value</u> (and tendency <u>Down, Up or No change)</u>	R28L/2600FT
HZ	Significant present, forecast and recent weather: see table (on back)	TSRA
FEW020	Cloud amount, height and type: SKy Clear 0/8, FEW >0/8-2/8, SCaTtered 3/8-4/8, BroKeN 5/8-7/8, OVerCast 8/8; 3-digit height in hundreds of ft; Towering CUmulus or CumulonimBus in METAR; in TAF, only CB. Vertical Visibility for obscured sky and height "VV004". More than 1 layer may be reported or forecast. In automated METAR reports only, CLeaR for "clear below 12,000 feet"	OVC010CB
	Temperature: degrees Celsius; first 2 digits, temperature "/" last 2 digits, dew-point temperature; Minus for below zero, e.g., M06	18/16
	Altimeter setting: indicator and 4 digits; in U.S., A-inches and hundredths; (Q-hectoPascals, e.g., Q1013)	A2992

AVIATION ROUTINE WEATHER REPORT (METAR)

Explanation **Forecast** WS010/31022KT speed above the indicated height, and unit, KT

Report In U.S. TAF, non-convective low-level (≤2,000 ft) Wind Shear: 3-digit height (hundreds of ft); "/"; 3-digit wind direction and 2-3 digit wind RMK In METAR, ReMarK indicator & remarks, For example: Sea-Level **SLP045** Pressure in hectoPascals & tenths, as shown: 1004.5 hPa; Temp/ T01820159 dew-point in tenths °C, as shown: temp. 18.2°C, dew-point 15.9°C FM1930 FroM and 2-digit hour and 2-digit minute **beginning** time: indicates significant change. Each FM starts on new line, indented 5 spaces. **TEMPO 2022** TEMPOrary: changes expected for < 1 hour and in total, < half of 2-digit hour **beginning** and 2-digit hour **ending** time period PROB40 0407 PROBability and 2-digit percent (30 or 40); probable condition during 2-digit hour **beginning** and 2-digit hour **ending** time period

Table of Significant Present, Forecast and Recent Weather - Grouped in categories and used in the order listed below; or as needed in TAF, No Significant Weather. **QUALIFIER**

+ Heavy

PR Partial

SN Snow

FU Smoke

PY Sprav

GR Hail

TS Thunderstorm

SG Snow grains

VA Volcanic ash

DU Widespread dust

PO Well developed

UNITED STATES DEPARTMENT OF COMMERCE

GS Small hail/snow pellets

BECoMinG: change expected during 2-digit hour beginning and

Intensity or Proximity - Liaht

BECMG 1315

- VC Vicinity: but not at aerodrome; in U.S. METAR, between 5 and 10SM of the point(s) of
- observation; in U.S. TAF, 5 to 10SM from center of runway complex (elsewhere within 8000m) Descriptor MI Shallow

2-digit hour ending time period

"no sign" Moderate

BC Patches

BL Blowing SH Showers FZ Freezing DR Drifting WEATHER PHENOMENA

Precipitation

- DZ Drizzle RA Rain PL Ice pellets IC Ice crystals
- UP Unknown precipitation in automated observations
- Obscuration
- BR Mist (≥5/8SM) FG Fog (<5/8SM)
- SA Sand HZ Haze

NOAA/PA 96052

- Other SQ Squall SS Sandstorm DS Duststorm FC Funnel cloud +FC tornado/waterspout
 - dust/sand whirls Explanations in parentheses "()" indicate different worldwide practices. Ceiling is not specified; defined as the lowest broken or overcast layer, or the vertical visibility.
 - NWS **TAFs** exclude turbulence, icing & temperature forecasts; NWS **METARs** exclude trend fcsts Although not used in US, Ceiling And Visibility OK replaces visibility, weather and clouds if: visibility ≥10 km; no cloud below 5000 ft (1500 m) or below the highest minimum sector altitude, which-
 - ever is greater and no CB; and no precipitation, TS, DS, SS, MIFG, DRDU, DRSA or DRSN.

National Oceanic and Atmospheric Administration—National Weather Service

FAA AND NWS

Air Traffic Control System Command Center

Main Number......703-904-4400

RGNL AIR TRAFFIC DIVISIONS		
REGION	TELEPHONE	
Alaskan	907-271-5464	
Central	816-329-2500	
Eastern	718-553-4502	
Great Lakes	847-294-7202	
New England	781-238-7500	
Northwest Mountain	425-227-2500	
Southern	404-305-5500	
Southwest	817-222-5500	
Western Pacific	310-725-6500	

AIR ROUTE TRAFFIC CONTROL CENTERS (ARTCCs)

ARTCC NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS Hours	BUSINESS TELEPHONE #
Albuquerque	817-222-5006	7:30 a.m4:00 p.m.	505-856-4300
Anchorage	907-271-5936	7:30 a.m4:00 p.m.	907-269-1137
Atlanta	404-305-5180	7:30 a.m5:00 p.m.	770-210-7601
Boston	617-238-7001	7:30 a.m4:00 p.m.	603-879-6633
Chicago	847-294-8400	8:00 a.m4:00 p.m.	630-906-8221
Cleveland	847-294-8400	8:00 a.m4:00 p.m.	440-774-0310
Denver	425-227-1389	7:30 a.m4:00 p.m.	303-651-4100
Ft. Worth	817-222-5006	7:30 a.m4:00 p.m.	817-858-7300
Houston	817-222-5006	7:30 a.m4:00 p.m.	281-230-5300
Indianapolis	847-294-8400	8:00 a.m4:00 p.m.	317-247-2231
Jacksonville	404-305-5180	8:00 a.m4:30 p.m.	904-549-1501
Kansas City	816-329-3000	7:30 a.m4:00 p.m.	913-254-8500
Los Angeles	661-265-8200	7:30 a.m4:00 p.m.	661-265-8200
Memphis	404-305-5180	7:30 a.m4:00 p.m.	901-368-8103
Miami	404-305-5180	7:00 a.m3:30 p.m.	305-716-1500
Minneapolis	847-294-8400	8:00 a.m4:00 p.m.	651-463-5580
New York	718-995-5426	8:00 a.m4:40 p.m.	516-468-1001
Oakland	310-725-3300	6:30 a.m3:00 p.m.	510-745-3331
Salt Lake City	425-227-1389	7:30 a.m4:00 p.m.	801-320-2500
Seattle	425-227-1389	7:30 a.m4:00 p.m.	253-351-3500
Washington	718-995-5426	8:00 a.m4:30 p.m.	703-771-3401

MAJOR TERMINAL RADAR APPROACH CONTROLS (TRACONS)

TRACON NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Atlanta	404-305-5180	7:00 a.m3:30 p.m.	404-669-1200
Chicago	847-294-8400	8:00 a.m4:00 p.m.	847-608-5509
Dallas/Ft. Worth	817-222-5006	7:30 a.m4:00 p.m.	972-615-2500
Denver	425-227-1389	7:30 a.m4:00 p.m.	303-342-1500
Houston	817-222-5006	7:30 a.m4:00 p.m.	281-230-8400
New York	718-995-5426	8:00 a.m4:30 p.m.	516-683-2901
Northern CA	310-725-3300	7:00 a.m3:30 p.m.	916-366-4001
Potomac	718-995-5426	8:00 a.m4:30 p.m.	540-349-7500
Southern CA	310-725-3300	7:30 a.m4:00 p.m.	858-537-5800

^{*}Facilities can be contacted through the Rgnl Duty Officer during non-business hours.

BUSINESS **TELEPHONE #**

505-842-4366

301-735-2380

410-962-3555

617-455-3100

203-627-3428

818-567-4806

704-344-6487

773-884-3670

773-601-7600

216-898-2020

606-767-1006

972-615-2531

937-454-7300

303-342-1600

734-955-5000

907-474-0050

305-356-7932

713-230-8400

404-669-1200

808-840-6100

713-847-1400

317-484-6600

808-877-0725

816-329-2700

702-262-5978

310-342-4900

504-471-4300

901-322-3350

305-869-5400

612-713-4000

615-781-5460

718-656-0335

718-335-5461

973-565-5000

408-982-0750

909-983-7518

407-850-7000 215-492-4100

602-379-4226

412-269-9237

503-493-7500

919-840-5544

703-413-1535

801-325-9600

210-805-5507

619-299-0677

650-876-2883

809-253-8663

206-214-4600

314-890-1000

813-371-7700

907-271-2700

201-288-1889

571-323-6372

561-683-1867

914-948-6520

8:00 a.m.-4:30 p.m.

8:00 a.m.-4:00 p.m.

8:00 a.m.-4:00 p.m.

8:00 a.m.-4:00 p.m.

8:00 a.m.-4:30 p.m.

8:30 a.m.-5:00 p.m.

7:30 a.m.-4:00 p.m.

7:30 a.m.-4:00 p.m.

8:00 a.m.-4:00 p.m.

7:30 a.m.-4:00 p.m.

7:00 a.m.-3:30 p.m.

7:30 a.m.-4:00 p.m.

7:00 a.m.-3:30 p.m.

7:30 a.m.-4:00 p.m.

8:00 a.m.-5:00 p.m.

8:00 a.m.-4:00 p.m.

7:30 a.m.-4:00 p.m.

7:30 a.m.-4:00 p.m.

7:30 a.m.-4:00 p.m.

7:00 a.m.-3:30 p.m.

7:00 a.m.-4:30 p.m.

7:30 a.m.-4:00 p.m.

7:00 a.m.-4:00 p.m.

8:00 a.m.-4:00 p.m.

7:00 a.m.-3:30 p.m.

8:00 a.m.-4:30 p.m.

8:00 a.m.-4:30 p.m.

7:30 a.m.-4:00 p.m.

7:30 a.m.-4:00 p.m.

7:30 a.m.-4:00 p.m.

7:30 a.m.-5:00 p.m.

8:00 a.m.-4:30 p.m.

7:30 a.m.-4:00 p.m.

8:00 a.m.-4:30 p.m.

7:30 a.m.-4:00 p.m.

8:00 a.m.-4:30 p.m.

8:00 a.m.-4:30 p.m.

7:30 a.m.-4:00 p.m.

8:00 a.m.-4:30 p.m.

8:00 a.m.-4:30 p.m.

7:00 a.m.-3:30 p.m.

7:30 a.m.-5:00 p.m.

7:30 a.m.-4:00 p.m.

7:30 a.m.-4:00 p.m.

7:30 a.m.-4:00 p.m.

7:30 a.m.-4:00 p.m.

8:00 a.m.-4:30 p.m.

8:00 a.m.-4:30 p.m.

8:00 a.m.-4:30 p.m.

8:00 a.m.-4:30 p.m.

KEY AIR TRAFFIC FACILITIES

404-305-5180

847-294-8400

847-294-8400

847-294-8400

708-294-7401

817-222-5006

847-294-8400

425-227-1389

847-294-8400

907-271-5936

404-305-5180

817-222-5006

404-305-5180

310-725-3300

817-222-5006

847-294-8400

310-725-3300

816-329-3000

310-725-3300

310-725-3300

817-222-5006

404-305-5180

404-305-5180

847-294-8400

404-305-5180

718-995-5426

718-995-5426

718-995-5426

310-725-3300

310-725-3300

404-305-5180

718-995-5426

310-725-3300

718-995-5426

425-227-1389

404-305-5180

718-995-5426

425-227-1389

817-222-5006

310-725-3300

310-725-3300

404-305-5180

425-227-1389

816-329-3000

404-305-5180

907-271-5936

718-995-5426

718-995-5426

404-305-5180

718-995-5426

NW. 23 SEP 2010 to 18 NOV 2010

*Facilities can be contacted through the Rgnl Duty Officer during non-business hours.

	DAILY NAS REPORTAB	REPORTABLE AIRPORTS	
AIRPORT NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	
Albuquerque Intl Sunport, NM	817-222-5006	8:00 a.m5:00 p.m.	
Andrews AFB, MD	718-995-5426	8:00 a.m4:30 p.m.	
Baltimore/Washington			
Intl Thurgood Marshall, MD	718-995-5426	8:00 a.m4:30 p.m.	
Boston Logan Intl, MA	781-238-7001	7:30 a.m4:00 p.m.	
Bradley Intl, CT	617-238-7001	7:30 a.m4:00 p.m.	
Burbank/Bob Hope, CA	310-725-3300	7:00 a.m5:30 p.m.	

Charlotte Douglas Intl. NC

Cleveland Hopkins Intl, OH

Intercontinental/Houston, TX

Hartsfield-Jackson Atlanta Intl. GA

Louis Armstrong New Orleans Intl, LA

Norman Y. Mineta San Jose Intl, CA

Covington/Cincinnati, OH

Dallas/Ft. Worth Intl, TX

Dayton Cox Intl. OH

Denver Intl. CO

Detroit Metro, MI

Fairbanks Intl, AK Fort Lauderdale Intl, FL

George Bush

Honolulu Intl. HI

Houston Hobby, TX

Indianapolis Intl, IN

Kansas City Intl, MO

Las Vegas McCarran, NV Los Angeles Intl, CA

Minneapolis/St. Paul, MN

New York Kennedy Intl, NY

New York La Guardia, NY

Newark Liberty Intl, NJ

Kahului/Maui, HI

Memphis Intl, TN

Nashville Intl, TN

Ontario Intl, CA

Orlando Intl. FL

Philadelphia Intl, PA

Pittsburgh Intl, PA

Raleigh-Durham, NC

Salt Lake City, UT

San Juan Intl PR

Tampa Intl. FL

Teterboro, NJ

San Antonio Intl, TX

San Francisco Intl, CA

Seattle-Tacoma Intl, WA

St. Louis Lambert, MO

Portland Intl, OR

Phoenix Sky Harbor Intl, AZ

Ronald Reagan Washington National, DC

San Diego Lindbergh Intl, CA

Ted Stevens Anchorage Intl, AK

Washington Dulles Intl. DC

West Palm Beach, FL

Westchester Co, NY

Miami Intl, FL

Chicago Midway, IL

Chicago O'Hare Intl, IL

Air Route Traffic Control Center frequencies and their remoted transmitter sites are listed below for the coverage of this volume. Bold face type indicates high altitude frequencies, light face type indicates low altitude frequencies. To insure unrestricted IFR operations within the high altitude enroute sectors, the use of 720 channel communications equipment (25 kHz channel spacing) is required.

```
RDENVER CENTER - 125.9
                                                                     H-1-2-3-4-5-6, L-8-9-10-11-12-13-14-15
            Casper - 135.6 118.925
            Cherokee - 132.1
            Cheyenne - 134.575 133.175 132.1 125.9
            Laramie - 125.9
            Lusk - 135.6
           Medicine Bow - 133.175 132.1 126.5
           Rock Springs - 128.5
            Sundance - 135.6 133.675
         RSALT LAKE CITY CENTER
                                                                                     H-1-2-3, L-9-11-12-13-14
                                                                                                         (KZLC)
ı
            Ashton - 132.4 128.35 128.35
            Baker - 128.05
           Big Piney - 128.35 128.35
           Billings - 127.75 127.75
           Blackfoot - 128.35 128.35
           Bliss - 128.55 121.15 118.05
١
           Boise - 118.05
           Boysen - 133.25 133.25
            Bozeman - 132.4 132.4
           Burley - 118.05
           Butte - 133.4 132.4 132.4
            Cascade - 121.15
           Francis Peak - 127.7
            Glasgow - 126.85 126.85
            Great Falls - 133.4 119.75
           Green River - 124.35 124.35
           Jackson - 133.25 133.25
```

Ontario - 128.05 Rome - 128.05 121.15 Salmon - 132.4 132.4 Sheridan - 127.75 127.75 Squaw Butte - 128.05 121.15

Lakeside - 133.4 119.75 Lovell - 133.25 133.25 Malad City - 133.8 127.7 125.925 Miles City - 126.85 126.85 Miller Peak - 133.4 119.75 119.75

Judith Mountain - 133.4 126.85 126.85

R SEATTLE CENTER Antelope Mountain - 124.85

Arcata - 124.85 Badger Mountain - 127.05 127.05 134.95 134.95

Dallesport - 126.6 126.6 Fort Lawton - 127.05 127.05 Hoquiam - 128.3

Horton - 132.075 125.8 121.4 Kimberly - 135.45 Klamath Falls - 134.9 127.6

Lakeside - 123.95 Lakeview - 135.35 127.6 Larch Mountain - 128.3 128.3 126.6 126.6 Marlin - 126.1

Beacon Hill - 127.05 127.05 120.3 120.3 Cottonwood - 123.95 118.55

Medford - 135.15 124.85 121.4 Mohler - 128.45 Mullan Pass - 128.45 Nassel - 124.2

Neah Bay - 125.1 125.1 Redmond - 121.35 134.9 135.35 128.15 Rex-Parrett - 121.35

Scappoose - 124.2 128.15 **Spokane -** 123.95 119.225

Stampede Pass - 134.95 134.95 The Dalles - 135.45 119.65 Wallula - 132.6

Wenatchee - 126.1

Whidbev Island - 134.95 134.95 128.5 125.1 125.1 Yakima - 135.525 135.525 132.6 120.3 120.3 118.55

NW. 23 SEP 2010 to 18 NOV 2010

H-1-3, L-1-2-11-13

(KZSE)

VHF frequencies available at Flight Service Stations and at their remote communication outlets (RCO's) are listed below for the coverage of this volume. Frequencies in bold type are available all altitudes but recommended for use FL180 and above. "T" indicates transmit only and "R" indicates receive only. RCO's available at NAVAID's are listed after the NAVAID

BOISE AFSS ASHTON RCO 123.625

name. RCO's not at NAVAID's are listed by name.

BLISS RC0 122.4 BOISE RCO 122.2 122.6

CONNERS RCO 122.05 COEUR D'ALENE RCO 122.05 HAILEY RCO 122.4 IDAHO FALLS RCO 122.55 LEWISTON RCO 122.35

CASCADE RCO 122.35

MALAD CITY RCO 122.65 MOUNTAIN HOME RCO 122.6 MULLAN PASS RCO 122.15 POCATELLO RCO 122.35

ROME RCO 122.65 SALMON RCO 122.55 SQUAW BUTTE RCO 122.45 STANLEY RCO 122.6 TWIN FALLS RCO 122.25

CASPER AFSS ANTELOPE GAP RCO 122.2

BIG PINEY RCO 122.3 BOYSEN RESERVOIR RCO 122.3 CASPER RCO 122.2 122.4 CHEROKEE RCO 122.4

CHEYENNE RCO 122.3 CODY RCO 122.3 CONVERSE RCO 121.975

CRAZY WOMAN RCO 122.025 **DUNIOR RCO 122.6**

FORT BRIDGER RCO 122.3 GILLETTE RCO 122.3

JACKSON RCO 122.05

LARAMIE RCO 122.6

NEWCASTLE RCO 122.5

RAWLINS RCO 122.2 RIVERTON RCO 122.2

ROCK SPRINGS RCO 122.6 SHERIDAN RCO 122.5 WORLAND RCO 122.4

MEDICINE BOW RCO 122.5

GREAT FALLS AFSS BILLINGS RCO 122.55

BOZEMAN RCO 122.5 BUTTE RCO 122.2 122.4

COPPERTOWN RCO 122.65 CUT BANK RCO 122.2

DILLON RCO 122.15 DRUMMOND RCO 122.25 GLASGOW RCO 122.25 GLENDIVE RCO 122.55

GREAT FALLS RCO 122.6 HARLOWTON RCO 122.4 **HAVRE RCO 123.65**

HELENA RCO 122.55 JUDITH MOUNTAIN RCO 122.2 LAKESIDE RCO 122.5

LEWISTOWN RCO 122.35 LIVINGSTON RCO 122.2

MILES CITY RCO 122.2 MILLER PEAK RCO 122.45 **SIDNEY RCO 123.65** TOWER HILL RCO 122.3 WOLF POINT RCO 122.45

YELLOWSTONE RCO 119.4 Mc MINNVILLE AFSS

ASTORIA RCO 122.3 AUGSPURGER RCO 122.3

BEAVER MOUNTAIN RCO 122.4 **BURNS RCO 122.5** CAPE BLANCO RCO 122.4

ENTERPRISE RCO 122.5 EUGENE RCO 122.3

KIMBERLY RCO 122.6 KLAMATH FALLS RCO 122.6 LA GRANDE RCO 122.5 LAKEVIEW RCO 122.3

MC MINNVILLE RCO 122.45 MEDFORD RCO 122.65 NEWBERG RCO 122.45

NEWPORT RCO 122.5 NORTH BEND RCO 122.4 ONTARIO RCO 122.3

PENDLETON RCO 122.2 PORTLAND RCO 122.6 REDMOND RCO 122.5

ROSEBURG RCO 122.55 SALEM RCO 122.6 SEXTON SUMMIT RCO 122.5

SUNRIVER RCO 122.3

WALLULA RCO 122.6

236 FSD0

FLIGHT STANDARDS DISTRICT OFFICES (FSDO)

Below is a list of FSDO's in the area of coverage of this directory. These offices serve the aviation industry and general public on matters relating to certification and operation of general aviation aircraft. Address letters to Manag Flight Standards District Office–Federal Aviation Administration.

IDAHO

3295 Elder Street, Suite 350 Airport Plaza Boise, ID 83705

Telephone: 208-334-1238

MONTANA

Helena Airport 2725 Skyway Drive Helena, MT 59601

Telephone: 406-449-5270

1-800-457-9917

OREGON

Portland Flight Standards District Office 3180 NW 229th Avenue

Hillsboro, Oregon 97124 Telephone: 503–615–3200 FAX 503–615–3300

WASHINGTON

Seattle FSD0 1601 Lind Ave. S. W. Renton, WA 98057

Telephone: 425-227-2813

Telephone: 509-532-2340

Spokane FSDO Felts Field 6133 E. Rutter Avenue Spokane, WA 99212

PREFERRED IFR ROUTES

A system of preferred routes has been established to guide pilots in planning their route of flight, to minimize route

changes during the operational phase of flight, and to aid in the efficient orderly management of the air traffic using federal

airways. The preferred IFR routes which follow are designed to serve the needs of airspace users and to provide for a

systematic flow of air traffic in the major terminal and en route flight environments. Cooperation by all pilots in filing

preferred routes will result in fewer traffic delays and will better provide for efficient departure, en route and arrival air traffic service

The following lists contain preferred IFR routes for the low altitude stratum and the high altitude stratum. The high altitude list is in two sections; the first section showing terminal to terminal routes and the second section showing single direction route segments. Also, on some high altitude routes low altitude airways are included as transition routes. The following will explain the terms/abbreviations used in the listing:

1. Preferred routes beginning/ending with an airway number indicate that the airway essentially overlies the airport and

flight are normally cleared directly on the airway. 2. Preferred IFR routes beginning/ending with a fix indicate that aircraft may be routed to/from these fixes via a Standard Instrument Departure (SID) route, radar vectors (RV), or a Standard Terminal Arrival Route (STAR).

- 3. Preferred IFR routes for major terminals selected are listed alphabetically under the name of the departure airport. Where several airports are in proximity they are listed under the principal airport and categorized as a metropolitan area; e.g., New York Metro Area.
- 4. Preferred IFR routes used in one direction only for selected segments, irrespective of point of departure or destination, are listed numerically showing the segment fixes and the direction and times effective.
 - 5. Where more than one route is listed the routes have equal priority for use. 6. Official location identifiers are used in the route description for VOR/VORTAC navaids.

intersection names will be assigned as soon as routine processing can be accomplished. Navaid radial (no distance

- 7. Intersection names are spelled out.
- 8. Navaid radial and distance fixes (e.g., ARD201113) have been used in the route description in an expediency and
- stated) may be used to describe a route to intercept a specified airway (e.g., MIV MIV101 V39); another navaid radial (e.g., UIM UIM255 GSW081); or an intersection (e.g., GSW081 FITCH). 9. Where two navaids, an intersection and a navaid, a navaid and a navaid radial and distance point, or any navigable combination of these route descriptions follow in succession, the route is direct.
- 10. The effective times for the routes are in UTC. During periods of daylight saving time effective times will be one hour earlier than indicated. All states observe daylight saving time except Arizona, Puerto Rico and the Virgin Islands. Pilots planning flight between the terminals or route segments listed should file for the appropriate preferred IFR route.
- 11. (90-170 incl) altitude flight level assignment in hundred of feet.
- 12. The notations "pressurized" and "unpressurized" for certain low altitude preferred routes to Kennedy Airport indicate the preferred route based on aircraft performance.
 - 13. High Altitude Preferred IFR Routes are in effect during the following time periods unless otherwise noted.

 - 14. Use current SIDs and STARSs for flight planning.

 - 15. For high altitude routes, the portion of the routes contained in brackets [] is suggested but optional. The portion of
- the route outside the brackets will likely be required by the facilities involved.

SPECIAL LOW ALTITUDE DIRECTIONAL ROUTES

	Route	Effective Times (UTC)
Low altitude IFR traffic 13000 feet and below		(0.0)
	OLM V165 UBG	1400-0700
		1400-0700
Northbound	OBG A102 OFIN	1400-0700
Low Altitude IFR traffic 9000 feet and below o	verflying the Seattle, WA Area:	
Southbound/Southwestbound	V165	1400-0700
*	V165	1400-0700
Eastbound	V004 SEA V002	1400-0700
Lastodila	V004 SLA V002	1400-0700
Low Altitude IFR traffic 10000 to 15000 overf	lying the Seattle, WA Area:	
Southbound	V165 V495	1400-0700
Southbound	V023 V165 DIGGN V495	1400-0700
Eastbound	V004 SEA V2	1400-0700
2401004114	700 1 027 72	1.00 0.00
Low Altitude IFR traffic 10000 to 15000 overf	ying the Seattle, WA Area landing in PDX area:	
Southbound	V165 V495 SEA HELNS-STAR	1400-0700
Southbound	V023 V165 DIGGN V495 SEA HELNS-STAR	1400-0700
	TOZO TIGO DIGGIT TIGO GENTIELNO GININININI	1.00 0.00
Low Altitude IFR traffic from the North termina	ting at McMinnville, OR, Aurora State, OR, or Hillsboro,	OR:
Southbound	V165 UBG	1400-0700

PREFERRED IFR ROUTES

SPECIAL LOW ALTITUDE DIRECTIONAL ROUTES

Terminals	Route	Effective Times (UTC)
From the Eugene, OR Area: (props and turbop		4 400 070
Northbound	V481 CVO V495 UBG V448 OED	1400-070 1400-070
	HIGH ALTITUDE	1100 010
	HIGH ALTHODE	Effective
Terminals	Route	Times (UTC)
PORTLAND (PDX)		
Burbank (BUR)	J67 LIN J189 AVE FIM	1300-060
Chicago O'Hare (ORD)	J16 MCW JVL-STAR	0000-235
Detroit Metro-Wayne Co (DTW) Houston (HOU)	ODI J34 BAE MKG POLAR-STAR(Turbojets-non-advanced NAV only) PNH MQP	
	ELLVR TEXXN-STARor	
	(Turbojets-GPS or DME/DME-IRU equipped) PNH	
	MQP ELLVR COACH (RNAV)—STAR	
Houston (IAH)	(Non-advanced NAV only) PNH MQP RIICE-STAR or	
	(GPS or DME/DME/IRU-equipped) PNH MQP	
	BAZBL (RNAV)-STAR	
Long Beach (LGB)	J67 LIN J189 AVE FIM.	1300-060
Los Angeles (LAX)	J67 LIN J189 AVE FIM	1300-060
Ontario (ONT)	J67 LKV J5 EHF PMD	1300-060
Santa Ana (SNA)	J67 LIN J189 AVE FIM	1300-060
EEATTLE BOEING FLD (BFI)	30. E. (3100 / (E) IIII.	1000-000
Burbank (BUR)	SEA J5 LKV J67 LIN J189 AVE FIM	1300-060
Long Beach (LGB)	SEA J5 LKV J67 LIN J189 AVE FIM	1300-060
Los Angeles (LAX)	SEA J5 LKV J67 LIN J189 AVE FIM	1300-060
Ontario (ONT)	SEA J5 EHF ZIGGY-STAR	1300-060
Santa Ana (SNA)EATTLE/TACOMA (SEA)	SEA J5 LKV J67 LIN J189 AVE FIM	1300-060
Anchorage (ANC)	(RNAV only) SQUIM AKWAY AKHOG LAIRE AKZOO	
Burbonk (BUD)	JOHSUMMA-DP SUMMA J5 LKV J67 LIN J189 AVE	
Burbank (BUR)	FIM	1300-060
Cleveland Metro Area (CLE) (CGF) (BKL)		
(LNN) (LPR)	BAE J34 GRR HIMEZ-STAR	
Detroit Metro-Wayne Co. (DTW)	J90 HLN J34 BAE MKG POLAR-STAR	
Houston (HOU)	(Turbojets-non-advanced NAV only) PNH MQP ELLVR TEXXN-STAR	
	or	
	(Turbojets-GPS or DME/DME-IRU equipped) PNH	
	MQP ELLVR COACH (RNAV)-STAR	
Houston (IAH)	(Non-advanced NAV only) PNH MQP RIICE-STAR or	
	(GPS or DME/DME/IRU-equipped) PNH MQP BAZBL (RNAV)-STAR	
Kennedy (JFK)	J90 HLN J34 ODI J30 J90 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	
Long Beach (LGB)	SUMMA-DP SUMMA J5 LKV J67 LIN J189 AVE	
Los Angeles (LAX)	FIM SUMMA-DP SUMMA J5 LKV J67 LIN J189 AVE	1300-060
Newark (EWR)	FIM J90 ABR J70 GEP DLL J34 CRL J584 SLT	1300-060
0.4.1.4017	FQM-STAR	100
Ontario (ONT)	SUMMA-DP SUMMA J5 EHF PMD	1300-060
Santa Ana (SNA)	SUMMA-DP SUMMA J5 LKV J67 LIN J189 AVE FIM	1300-060
SPOKANE (GEG)		1000 000
Chicago O'Hare (ORD)	(FL240 and above, Turbojets) to join DPR J16	0000 005
	MCW JVL-STAR	0000-235

O routes are RNAV routes that require the use of GNSS or DME/DME/IRU RNAV, unless otherwise indicated. Please note that this section does not apply to Q routes in the Gulf of Mexico. Gulf of Mexico Q routes are explained in the Southeast

and South Central A/FD volumes. O routes listed in this A/FD volume have at least part of one of their leg segments within this volume's area of coverage.

Route

Q1

02

03

05

Q7

09

Q11

013

015

019

Q20

021

Q22

023

Segment

ELMAA-ERAVE

ERAVE-EASON EASON-EBINY

EBINY-ENVIE

ENVIE-ETCHY

BOILE-HEDVI

HEDVI-HOBOL HOBOL-ITUCO

ITUCO-NEWMAN

FEPOT-FAMUK

FAMUK-FRFLY

FRFLY-FINER

FINER-FOWND FOWND-POINT REYES

BOILE-HEDVI

HEDVI-SCOLE

SCOLE-SPTFR

SPTFR-ZEBOL ZEBOL-SKTTR

SKTTR-EL PASO

HAROB-HISKU

HISKU-HARPR

HARPR-HOMEG

HOMEG-HUPTU HUPTU-STIKM

JINMO-JOGEN

IOGEN-IUNEI

JUNEJ-JAGWA

JAGWA-AVENAL

SUMMA-SMIGE

SMIGE-SUNBE

SUNBE-REBRG REBRG-DERBB

PAAGE-PAWLI

PAWLI-PITVE

PITVE-PUSHH PUSHH-LOS ANGELES

All segments

All segments

PLESS-NASHVILLE

CORONA-HONDS HONDS-UNNOS

UNNOS-FUSCO

GUSTI-OYSTY

OYSTY-ACMES ACMES-CATLN

FUSCO-JUNCTION

JONEZ-RAZORBACK

FORT SMITH-RAZORBACK OKM, RZC, EOS, TUL

FTCHY-POINT REYES

GNSS and DME/DME/IRU RNAV operations are authorized along Q routes at FL 180 and above. GNSS and DME/DME/IRU RNAV MEAs will only be published if above FL 180.

DMF

CVO, DSD, OED, BTG, UBG, ONP, EUG, LMT

OED, PYE, OAK, LIN, ECA, LMT, RBL, ENI, SAC, FJS

OLM, TOU, HOM, CVO, BTG, DSD, LTJ, UBG, ONP, EUG BTG, DSD, OED, CVO, EUG, ONP, UBG, RBL, LMT

OED, PYE, ECA, LIN, OAK, ENI, RBL, LMT, SAC, FJS

PXR, BLH, BZA, GBN, TFD, TUS, SSO, CIE, SVC, TCS

OLM, ONP, CVO, EUG, HQM, UBG, BTG, LTJ, DSD, HUH

ONP, CVO, EUG, LTJ, DSD, UBG, BTG, RBL, OED, LMT, FJS, LKV

LTJ, IMB, UBG, EUG, CVO, RBL, LMT, FMG, DSD, LKV, OED, BTG RBL, LMT, FMG, LIN, SAC, ECA, ENI, MOD, SWR, OAK, LKV, CZQ, AVE, SNS

EUG, FMG, SAC, IMB, LKV, OED, DSD, RBL, LMT, CVO, REO FMG, SAC, LIN, SWR, MOD, OAL, RBL, LKV, LMT, MVA, CZQ

CVO, HQM, LTJ, UBG, BTG, ONP, IMB, EUG, OLM, DSD, YKM, PDT, SEA

IMB, UBG, EUG, IMB, RBL, LMT, FMG, SAC, OED, CVO, LKV, DSD, BTG RBL, LMT, FMG, SAC, ECA, MVA, CZQ, OAK, EHF, PMD, LKV, LIN, MOD, AVE, OED,

OLM, UBG, SEA, YKM, BTG, ONP, IMB, HQM, PDT, EUG, LTJ, CVO, DSD, OED,

EPH, UBG, CVO, EUG, HQM, YKM, OLM, PDT, BTG, ONP, IMB, LTJ, DSD, LKV,

SAC, ECA, FMG, LIN, OAL, MOD, EHF, LAX, PMD, PDZ, HEC, OCN, CZQ, AVE, RZS

EWM, CUS, SVC, TCS, SSO, CIE, ELP, DMN, CME

CVO, EUG, OED, RBL, LMT, ENI, FJS, LKV SAC, PYE, LIN, OAK, ECA, LMT, RBL, ENI, OED, FJS

OAK, MOD, ECA, EHF, PRB, AVE, SNS, CZQ

CZO, PMD, EHF, LAX, RZS, AVE, MOD, ECA

ENL, GOO, PXV, BNA, IIU, FAM, BWG, CSX CNX, ABQ, ACH, ONM, TXO, LVS, TCC, CME

ABI, CWK, CSI, INK, LZZ, JCT, SJT, STV, FST

AEX, DAS, MCB, LLA, BTR, LCH, HRV, LFT, LEV

RQR, GCV, MCB, BTR, PCU, GPT, HRV, LEV, SJI

SJI, MGM, MCB, BFM, GPT, GCV, HRV, CEW, MVC, PCU, MEI

FST, ACH, INK, CME, SJT, TXO, TCC

BYP, EOS, TUL, TXK, ADM, RZC, OKM

NW. 23 SEP 2010 to 18 NOV 2010

OAK, ECA, PYE, LIN, SAC, ENI, RBL

EPH, MWH

OED, SEA

None: GNSS required None; GNSS required

CNX, INK, CME, TXO, TCC

BZA, GBN, BLH, EED, PXR, IPL, TFD, DRK, TUS

CVO. OED. EUG. LMT. RBL. ENI. ONP. FJS

BTG, OLM, HQM, HUH, UBG

LIN. ECA. RBL. ENI. SAC. OAK

TFD, GBN, BLH, PXR, TUS, CIE, SSO

EWM, TFD, PXR, CIE, SSO, TUS, TCS

OED, EUG, RBL, LMT, ENI, CVO, FJS

EED. BLH. BZA. GBN. TRM. IPL. TFD

EED, BLH, BZA, GBN, TRM, IPL, TFD EED, IPL, BZA, GBN, TFD, PXR, BLH

LIN. ECA. PYE. RBL. SAC. ENI

Q-ROUTES

HEC, PDZ, OCN, PMD, LAX, RZS, IPL, TRM, PKE, BLH, EED, BZA, GBN, PXR

HEC, PDZ, OCN, PMD, LAX, RZS, IPL, TRM, PKE, BLH, EED, BZA, GBN, PXR

BTG, OLM, HQM, HUH, LTJ, CVO, DSD, OED, UBG, ONP, EUG

DME facilities that have been assessed for RNAV operations are listed below. Q routes with no DME facilities listed are

limited to GNSS RNAV operations only. Those routes will have an enroute chart note "GNSS REQUIRED".

239

MEEOW-WALNUT RIDGE ELD, MEM, LIT, FAM, RZC

AEX. DAS. LCH. MCB. LFT. BTR

WALNUT RIDGE-WLSUN MEM, STL, BWG, PXV, ENL, FAM, ARG, BNA, CSX, TTH

BWG, PXV, ENL, BNA, TTH

WALNUT RIDGE-DEVAC LIT, JKS,GQO, MEM, BNA, FAM, ARG, DYR, VUZ, RMG

OKM, SGF, RZC, EOS, TUL

EIC, LIT, ELD, OKM, TXK

ARG, LIT, FAM, SGF, MEM

PXV, TTH, BWG, ENL

MEM. ARG. LIT. JAN. ELD. SOS

MEM, PXV, BNA, BWG, ARG, ENL

GCV, MCB, JYU, PCU, MEI, HRV, CEW, SJI

ARG, LIT, FAM, ELD, SGF, RZC, MEM, TXK

ARG, CSX, FAM, PXV, ENL, MEM, STL, BWG, TTH, BNA

AEX. LEV. MCB. LCH. ROR. HRV. BTR. GCV. MCB. PCU. SJI. LBY

LAKE CHARLES-BATON

BATON ROUGE-IRUBE IRUBE-PAYTN

WLSUN-POCKET CITY

FORT SMITH-ZALDA

ESTEE-POCKET CITY

HARES-MEMPHIS

MEMPHIS-SIDAE SIDAE-POCKET CITY

GRAZN-PYRMD

PYRMD-HAKAT

HAKAT-ESTEE

ROUGE

024

Q25

Q26

Q27

Q28

Q29

	SIDAE-POCKET CITY	PXV, TTH, BWG, ENL
Q30	SIDON-VULCAN	GLH, MEM, VUZ, JAN, JYU, MEI, MGM, SQS, RMG
Q31	DHART-JODOX	SQS, LIT, TXK
	JODOX-MARVELL	SQS, LIT, ELD, MEM, ARG
	MARVELL-TIIDE	ARG, BWG, PXV, FAM, LIT, MEM, ENL, TTH
	TIIDE-POCKET CITY	BWG, PXV, ENL, TTH
Q32	EL DORADO-GAGLE	AEX, JAN, MEM, SQS, SWB, ELD, LIT, TXK
	GAGLE-CRAMM	JAN, SQS, MEM, ARG, VUZ, BNA, LIT
	CRAMM-NASHVILLE	BWG, MEM, VUZ, BNA, GQO
	NASHVILLE-SWAPP	BWG, IIU, PXV, VXV, BNA, GQO
Q33	DHART-LITTLE ROCK	AEX, ELD, LIT, TXK, SWB, ARG, MEM, SQS
	LITTLE ROCK-PROWL	ELD, SGF, FAM, LIT, ARG, MEM, RZC, CSX, STL
Q34	TEXARKANA-MATIE	LIT, SWB, TXK, BYP, EIC, ELD, SQS
	MATIE-MEMPHIS	LIT, ARG, MEM, ELD, SQS
	MEMPHIS-SWAPP	BWG, ARG, MEM, MKL, SQS,PXV, BNA, GQO, IIU, VXV
Q35	KIMBERLY-NEERO	LTJ, PDT, DSD, IMB, LKV, BOI, REO, BAM, SDO
	NEERO-WINEN	BQU, SDO, BAM, REO, BVL, ILC, DTA, ELY, CDC, MLF, BCE
	WINEN-CORKR	CDC, BCE, BLD, ILC, MLF, TBC, PGS, INW, DRK
	CORKR-DRAKE	TBC, BCE, BLD, DRK, PGS, FLG, GCN, INW, TFD
Q36	RAZORBACK-TWITS	RZC, MEM, SGF, BUM, TUL, EOS, FAM, ARG, LIT
	TWITS-DEPEC	MEM, GQO, BNA, BWG, FAM, ARG, PXV, IIU
	DEPEC-NASHVILLE	GQO, BWG, BNA, PXV, IIU
	NASHVILLE-SWAPP	VXV, BWG, BNA, GQO, PXV, IIU
Q38	ROKIT-INCIN	DAS, LCH, SWB, IAH, LFK, HUB, AEX
	INCIN-LAREY	JAN, MCB, SWB, AEX
	LAREY-BESOM	JAN, JYU, MEI, SQS, VUZ
Q40	ALEXANDRIA-DOOMS	AEX, SWB, LCH, JAN, HEZ, MCB
	DOOMS-WINAP	JAN, SQS, MEI, MCB
	WINAP-MISLE	MEI, VUZ, JYU
Q42	KIRKSVILLE-STRUK	CID, IOW, UIN, LMN, IRK, BDF, STL, DEC, ENL, CSX
	STRUK-DANVILLE	ENL, IOW, UIN, BDF, DEC, STL, CSX, SPI, TTH, BVT, JOT, VHP, OXI, ENL, OKK,
		OBK, GIJ, FWA, GSH, IRK
	DANVILLE-MUNCIE	GIJ, SPI, BDF, OBK, OKK, VHP, BVT, DEC, GSH, FWA, JOT, TTH, OXI, ROD, FLM
	MUNCIE-HIDON	FLM, VHP, GSH, TTH, GIJ, OKK, FWA, ROD, OXI, CRL, GSH, APE, DJB, DXO, HNN
		AIR, HVQ, CXR, EWC
	HIDON-BUBAA	AIR, APE, HNN, CXR, HVQ, EWC, DJB
	BUBAA-PSYKO	AIR, APE, DJB, CXR, HNN, EWC, SLT, CSN, JHW, ETG, PSB
	PSYKO-BRNAN	PSB, JHW, EWC, AIR, ETG, CSN, EMI, SLT
	BRNAN-MAALS	EMI, SLT, CSN, EWC, PSB, ETG, SAX, RBV, HNK, HUO, SIE
	MAALS-SUZIE	ETG, EMI, CSN, HUO, SIE, JFK, PSB, SLT, HNK
	SUZIE-EAST TEXAS	JFK, EMI, PSB, SLT, HNK, SIE, RBV, SAX, HUO, CYN
0104	EAST TEXAS-ELIOT	HUO, RBV, EMI, CYN, SAX, JFK, PSB, HNK
Q104	DEFUN-HEVVN	PIE, PZD, CRG, SZW, TAY, JYU, CEW, MGM, OTK, CRG
	HEVVN-PLYER	PIE, ORL, OMN, SRQ, TAY, LAL, CRG, SZW, PZD
	PLYER-SWABE	PIE, ORL, OMN, SRQ, TAY
	SWABE-ST PETERSBURG	LAL, ORL, OMN, SRQ, PHK, PIE
	ST PETERSBURG-	PHK, PBI, SRQ, PIE, VRB, ORL, FLL, LAL, OMN
	CYPRESS	
	NW	23 SEP 2010 to 18 NOV 2010
	INVV.	<u> </u>

OMN, PIE, PBI, SRQ, ORL, LAL

Q-ROUTES

MGM, PZD, OTK, JYU, SZW, CEW, SJI

SRQ, VRB, PHK, PIE, LAL, VKZ, ORL, PBI

OMN, AMG, CRG, SZW, PIE, TAY, PZD, OTK

PIE, OTK, CRG, OMN, LAL, SZW, SRQ, ORL, VRB

OMN, AMG, CRG, TAY, LAL, PZD, SZW, OTK, MCN

DLH, GEP, BRD, MCW, MSP, ASP, TVC, GRB, RWF FGT, BRD, MCW, GEP, ABR, FAR, DLH, ODI, RWF, FSD

MSP, MNM, ASP, TVC, GEP, RWF, BRD

SAW, GRB, BRD

SSM, TVC, ASP, SAW, GRB

LAL, ORL, OMN, PHK, PIE, CRG, VRB, TAY, OTK, PZD, AMG, SZW

SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG

SRO, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG

FGT, DLH, ODI, MCW, ABR, FAR, MSP, GEP, RWF, FSD, BRD

ODI, GEP, DLH, FGT, RWF, FAR, AXN, FSD, ABR, DLL, BRD

SSM, RHI, DLL, DLH, GEP, FGT, TVC, SAW, GRB, BRD, ODI

GEP, DLH, FGT, RWF, FAR, AXN, FSD, ABR, BRD, ODI, GRB

ECK, FNT, APN, SSM, GRR, MBL, SAW, BAE, MNM, DLL, AUW, ODI, STE, FGT, EAU

SSM, ECK, APN, GLR, PLN, ISO, MNM, DLL, RHI, DLH, GEP, FGT, ODI, ASP, TVC,

SSM, FNT, ECK, APN, SAW, GRB, BAE, DLL, AUW, ODI, FGT, DLH, EAU, MCW,

CEW. JYU. MGM. SZW. RRS. PZD. MAI. OTK. GEF. MGR. TAY. AMG. CRG

AMG, PZD, TAY, CRG, SZW, MGM, OTK, JYU, CEW, SJI

VKZ, VRB, PHK, PIE, LAL, SRQ, ORL, OMN, PBI, DHP

TAY, MCN, PZD, CRG, OTK, SZW, AMG, MCN, ATL, MGM

JYU, PZD, CEW, SZW, MGM, OTK, TAY, AMG, PIE, CRG

DME

Route

0106

0108

0110

0112

Q116

0118

Q501

0502

Q504

Q505

Segment

SMELZ-BULZI

BULZI-DRABK

DRABK-GADAY

GADAY-HKUNA

THNDR-JAYMC

JAYMC-RVERO

RVERO-KPASA

KPASA-BRUTS

BRUTS-GULFR GULFR-FEONA

DEFUN-HEVVN

HEVVN-INPIN

GULFR-CEEYA

KPASA-BRUTS

BRUTS-LENIE

VIXIS-GOPHER

GOPHER-SOBME

KENPA-GOPHER

GOPHER-SOBME

NOTAP-CESNA

CESNA-HEMDI

OMAGA-RIMBE

RIMBE-CESNA

CESNA-HEMDI

241

preferred IFR routes.

HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING

RNAV Routing Pitch and Catch Points

The purpose of this section of the Special High Altitude Routes is to present user routing options for flight within the initial HAR Phase I expansion airspace. Users are able to fly user-preferred routes, referred to as non-restrictive routing (NRR), between specific fixes described by pitch (entry into) and catch (exit out of) fixes in the HAR airspace. Pitch points indicate an end of departure procedures, preferred IFR routings, or other established routing programs where a flight can begin a segment of NRR. The catch point indicates where a flight ends a segment of NRR and joins published arrival procedures,

preferred IFR routing, or other established routing programs. The HAR Phase I expansion airspace is defined as that airspace at and above FL 350 in fourteen of the western and southern Air Route Traffic Control Centers (ARTCCs). The airspace includes Minneapolis (ZMP), Chicago (ZAU), Kansas City

(ZKC), Denver (ZDV), Salt Lake City (ZLC), Oakland (ZOA), Seattle Centers (ZSE), Los Angeles (ZLA), Albuquerque (ZAB), Fort Worth (ZFW), Memphis (ZME), and Houston (ZHU), Jacksonville (ZJX) and Miami (ZMA) are included for east-west routes

To develop a flight plan, select pitch and catch points based upon your desired route across the Phase I airspace. Filing requirements to pitch points, and from catch points, remain unchanged from current procedures. For the portion of the route between the pitch and catch points, non-restrictive routing is permitted. Where pitch points for a specific airport are not identified, aircraft should file an appropriate departure procedure (DP), or any other user preferred routing prior to the NRR portion of their routing. Where catch points for a specific airport are not

identified aircraft should file, after the NRR portion of their routing, an appropriate arrival procedure or other user preferred routing to their destination.


Additionally, information concerning the location and schedule of Special Use Airspace (SUA) and Air Traffic Control Assigned Airspace (ATCAA) can be found on the Web Site: http://sua.faa.gov/sua/Welcome.do. ATCAA refers to airspace in the high altitude structure supporting military and other special operations. Users are encouraged to file around these

In conjunction with the HAR program RNAV routes have been established to provide for a systematic flow of air traffic in specific portions of the enroute flight environment. The designator for these RNAV routes begin with the letter Q, for example, Q-501. Where those routes aid in the efficient orderly management of air traffic they will be published as

areas when they are scheduled to be active, thereby avoiding unplanned reroutes around them.

HAR expansion airspace may pitch vertical pitch line, or at the fixes

Except as noted, flights entering at the airspace boundary, at the

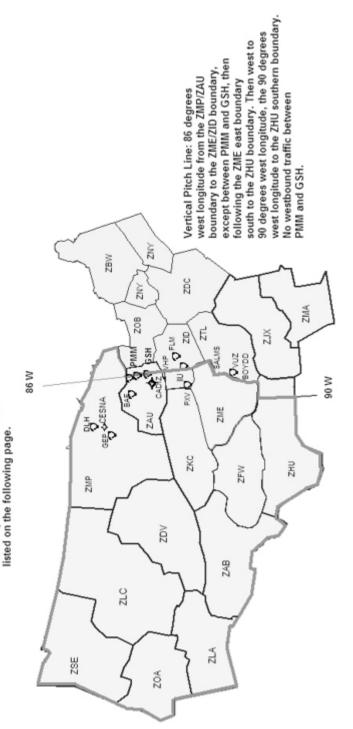

23 SEP 2010 to 18

244 HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING

HAR Special High Altitude Pitch (entry) Points for Nonrestrictive Routing for Airports

Located Outside HAR Phase I Expansion Airspace

HAR Phase I Expansion Airspace

Westbound traffic originating outside of HAR airspace entering ZMP, ZAU, ZKC and ZME can begin non-restrictive routing

over any of the following pitch points (listed from north to south): DLH, CESNA, GEP, BAE, MKG, GRR, PMM, GSH, CADIZ, FWA, VHP, FLM, IIU, PXV, SGF, RZC, BNA, SALMS, VUZ, BOYDD,

MIE.

Traffic originating outside of HAR airspace may also begin Nonrestrictive Routing upon crossing the pitch line depicted on the associated graphic. HAR Special High Altitude Pitch Points for Airports Located Within (below)

This section lists pitch points for airports within the HAR Phase I expansion airspace. ABQ, GUP, HANOS or ZUN

Albuquerque

ABI, FUZ, JCT, MQP, NAVYS, SJT or TNV Austin

Boca Raton. FL TBIRD KPASA Q118 LENIE

TBIRD KPASA Q116 CEEYA

TBIRD KPASA Q110 FEONA

TBIRD SMELZ Q106 BULZI

TBIRD SMELZ Q106 GADAY

Burbank includes GMN. MARKS Santa Monica

and Van Nuys DAG LAS or HEC EED

or PMD BLH

Chicago Terminal Area IOW, PLL275065, MZV or BAE Dallas/Fort Worth Terminal Area ABI, LBB, GTH, CDS, MRMAC, IRW, TUL, MLC, TXK

ELD, SWB or

Aircraft destined the Chicago terminal area Except MDW

EAKER MIDEE BDF BRADFORD-STAR

MLC J105 SGF BDF BRADFORD-STAR PUB, DVC, DBL, RLG, EKR, LAR, MBW, CYS, BFF, HANKI, NATTI, ASHBY, BELKE,

Denver Terminal Area CABET, WEEDS, OR BINKE Fort Lauderdale (or) THNDR KPASA 0118 LENIE Fort Lauderdale Executive

THNDR KPASA Q116 CEEYA THNDR KPASA Q110 FEONA

THNDR SMELZ Q106 GADAY

THNDR SMELZ 0106 BULZI LIT, ELD, MLC, JCT

Houston Bush Aircraft destined Atlanta Terminal Area LCH 024 PAYTN HONIE-RNAV STAR

NW. 23 SEP 2010 to 18 NOV 2010

Aircraft joining J37 to the northeast, GUSTI SID GUSTI Q22 CATLN

Aircraft joining J42 to the northeast, EL DORADO SID ELD Q32 J42

Aircraft joining J42 to the northeast, EL DORADO SID ELD Q32 J42

HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING LIT, ELD, MLC, JCT,

TIFTO, CATTS or KENTN

GMN SNS, EHF, LANDO

BNA, HAAWK, SALMS or SQS

WINCO KPASA Q118 LENIE WINCO KPASA Q116 CEEYA

WINCO KPASA Q110 FEONA WINCO SMELZ Q106 GADAY

DOBNE, MOSBI, NICLE, TRALR or ZELOT

TAY

or DAG LAS or TRM EED TRM PKE

or TRM PKE or TRM EED

or

GMN, RZS

Houston Hobby

Jacksonville. FL

Ontario

Las Vegas

Memphis

Kansas City Terminal Area

Los Angeles, includes

Long Beach includes

Miami Terminal Area

Orange County

	WINCO SMELZ Q106 BULZI
Milwaukee	GREAS
Minneapolis Terminal Area*	ONL, ABR, FAR, OBH, OVR, FOD
New Orleans Terminal Area	AEX, MEI, SQS, KAPLN
Orlando Terminal Area	WEBBS BRUTS Q118 LENIE or WEBBS GULFR Q116 CEEYA or WEBBS BULZI Q106 GADAY or WEBBS FEONA or WEBBS BULZI
Palm Beach, FL	TBIRD KPASA Q118 LENIE or TBIRD KPASA Q116 CEEYA or TBIRD KPASA Q110 FEONA or TBIRD SMELZ Q106 BULZI or TBIRD SMELZ Q106 GADAY
Palm Springs	TRM JOTNU BLD or TRM EED or TRM PKE
Phoenix	CHILY, CIE, CULTS, RSK, DOVEE, GCN, MESSI, SJN, DRYHT or MOHAK
Portland, OR	PDT, TIMEE
	IW. 23 SEP 2010 to 18 NOV 2010

HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING Salt Lake City HVE, DTA, MLF, BCE, OAL, MTU, BVL, OCS, TWF, DBS, BPI

> TCH J56 CHE TCH J173 EKR

FUZ. SJT. MOP. ABI

Saint Louis VIH, MAP, MYERZ, MCM HLV MCI

or

TRM JOTNU BLD

GALLI or INSLO

Aircraft North of LFK, LFK Aircraft South of HUB, ELA Aircraft South of LFK and North of HUB LCH

San Diego TRM FFD or TRM PKE

San Antonio Terminal Area

246

San Francisco Bay Area Oakland San Jose Seattle Southwest Florida Airports

(RSW/FMY)

Atlanta Terminal Area

BI UIT

Tampa Terminal Area

Catch Points for Airports Located Outside HAR Phase I Expansion Airspace

*MSP area departures with destinations east of 93 degrees west longitude via preferred IFR routing.

BULZI Q106 GADAY

BRUTS Q118 LENIE GULFR Q116 CEEYA

FEONA, BULZI

MFM

BWG, BWG

MEI HONIE (RNAV)-STAR PATYN HONIE (RNAV)-STAR

NW. 23 SEP 2010 to 18 NOV 2010

JOCKS KPASA Q118 LENIE JOCKS KPASA Q116 CEEYA JOCKS KPASA Q110 FEONA JOCKS SMELZ Q106 GADAY

GALLI, INSLO, HAROL JSICA

GALLI, INSLO, HAROL JSICA

JOCKS SMELZ Q106 BULZI

Aircraft through ZME airspace from ZKC airspace east of FAM, Pless Q19 BNA Aircraft through ZME airspace from ZKC airspace west of FAM, ARG Q26 DEVA

Aircraft through ZME airspace from ZID airspace west of a line from VHP to

Aircraft through ZME airspace from ZID airspace east of a line from VHP to

Aircraft through ZME airspace from ZFW airspace, MEM

This section lists exit points for aircraft destined to specific destinations which are outside the HAR Phase I airspace.

Baltimore-Washington*	GIJ, GEP, FLM, IIU, BAE, VHP, WHETT, BNA or VUZ
Boston*	GEP, CRL, ECK, IIU, BNA or VUZ
Buffalo*	GEP, CRL

GEP, CRL

BNA. VUZ

BNA. PXV

GIJ. VHP. GEP

Hartford Bradley*

Cincinnati Terminal Area

Cleveland Terminal Area*

Indianapolis Terminal Area

New York Kennedy*

New York LaGuardia*

Philadelphia Terminal Area*

Pittsburgh Terminal Area*

Detroit Terminal Area

Detroit Young

Louisville

Newark*

Pontiac Providence

Raleigh-Durham

Teterboro*

White Plains*

Willow Run*

Toronto Terminal Area

Washington Dulles/National*

Q505, Q504, Q502, Q501

Canton-Akron*

Charlotte

Aircraft north of SLC, JOT Aircraft over or south of SLC, ENL

SLC or SFO departures, ENL, JOT OBK BAE MKG POLAR-STAR

VHP FWA or

VHP FWA MIZAR-STAR LAN SPRTN-STAR BIB, SPI, JOT ENL, MEM GEP, VHP, FLM, IIU, BNA, VUZ

IOW GIJ J554 CRL J584 SLT FQM

GEP, VHP, FLM, IIU, BNA, VUZ

DBQ J94 PMM J70 LVZ LENDY-STAR GIJ, GEP, VHP, BAE, FLM, IIU, BNA, VUZ GIJ, GEP, VHP, BAE, WHETT, BNA, VUZ VHP, GIJ, BAE, GEP

LFD, LAN, VHP, FWA, GEP JHW, HEMDI, CESNA, GEP, GRB, TVC, ASP, VHP, IIU, BNA, VUZ FLM, IIU, BNA, VUZ ECK, SVM, SSM, GEP

GEP, VHP, CRL, BNA, VUZ GIJ, GEP, FLM, IIU, BAE, VHP, WHETT, BNA, VUZ GEP. VHP. CRL. FLM. IIU. BNA. VUZ LAN, LFD, VHP, FWA, GEP *Eastbound aircraft over flying ZMP center airspace entering Toronto center airspace, file direct SSM or via J63, J522

Entering ZAU or ZOB airspace from north of DPR J16 MCW, GEP Entering ZAU or ZOB airspace from or south of DPR J16 MCW, CRL.

HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING Catch Points for Airports Located Within (below) HAR Phase I Expansion Airspace

248

This section lists exit points for aircraft destined to airports which are below HAR Phase I airspace.

Albuquerque Terminal Area CURLY CURLY-STAR

> ESPAN FRIHO-STAR LAVAN LAVAN-STAR

FTI FRIHO-STAR

or MIERA MIERA-STAR

Austin Terminal Area Aircraft west of a north-south line at LFK, BLEWE

Aircraft east of a north-south line at LFK.IDU

Boca Raton, FL CEW DEFUN Q112 INPIN SHDAY (RNAV)-STAR

Aircraft through ZHU remain south of ZME and ZTL airspace

DEFUN Q112 INPIN SHDAY (RNAV)-STAR Aircraft through ZHU remain south of ZME and ZTL airspace

SZW INPIN SHDAY (RNAV)-STAR

Chicago Midway CVA MOTIF-STAR or

PIA MOTIF-STAR

DBO CVA MOTIF-STAR

LMN MOTIF-STAR

Chicago O'Hare Terminal Area GEP DLL MSN JVL JANESVILLE-STAR

TVC PULLMAN-STAR

FOD DBQ JVL JANESVILLE-STAR

MCW JANESVILLE-STAR GCK IRK BRADFORD-STAR

IRW, LOSZY, FSM, LIT, SQS, MLU, AEX, JUMBO, TQA, TURKI, HEATR

NW. 23 SEP 2010 to 18 NOV 2010

Dallas/Fort Worth Terminal Area Aircraft through ZME airspace from north and west of PXV, RZC, O23 FSM

Aircraft through ZME airspace from east of PXV, PXV Q25 MEEOW

Aircraft through ZME airspace from J52 and south of J52, SQS

Aircraft through ZME airspace from J6 down to, but not including J52, LIT, SQS

HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING OATHE DANDD-STAR

HGO QUAIL-STAR LOPEC-STAR or

Denver Terminal Area

Ft Lauderdale or

Houston Bush

Houston Hobby

Jacksonville

Ft Lauderdale Executive

or

ALS LARKS-STAR HBU POWDR-STAR or EKR TOMSN-STAR CHE TOMSN-STAR or BFF LANDR-STAR or LBF SAYGE-STAR HCT SAYGE-STAR RSK LARKS-STAR LAA QUAIL-STAR GCK J154 RYLIE DANDD-STAR airspace ٥r **ZOOSS TAY**

OCS J154 ALPOE RAMMS-STAR YANKI J114 SNY LANDR-STAR Aircraft filed BIL or east, MBW RAMMS-STAR CEW DEFUN Q104 PIE SWAGS (RNAV)-STAR Aircraft through ZHU airspace remain south ZME and ZTL airspace SZW HEVVN Q104 PIE SWAGS (RNAV)-STAR CRP, CVE, LLO, LUKIY, SAT Aircraft south and east of LLA, JEPEG

MISLE Q40 AEX Aircraft north and east of SJI, SJI Aircraft east of PXV, PXV Q31 DHART SWB Aircraft north and west of PXV, PROWL Q33 DHART SWB CRP, ELLVR, SAT, SWB or Aircraft south and east of GIRLY, KCEEE Aircraft north and east of SJI, SJI BESOM Q38 ROKIT ROKIT-STAR Aircraft east of PXV, PXV Q29 HARES SWB Aircraft north and west of PXV, PROWL Q33 DHART SWB **GADAY ZOOSS TAY** Aircraft through ZHU airspace remain south of ZME and ZTL

HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING 250 John Wayne-Orange County HEC. PGS. BLD Aircraft south of TBC from ZAB airspace, HIPPI

> LMN BRAYMER-STAR PWE ROBINSON-STAR EMP JHAWK-STAR

FAR GOPHER-STAR RWF SKETR-STAR

ALO KASPR-STAR BRD GOPHER-STAR BAE EAU CLAIRE-STAR FOD TWOLF-STAR

or

airspace or

Las Vegas DILCO, LIDAT, IGM Aircraft over PGA or north of PGA KSINO Aircraft south of PGA PGS LYNSY Los Angeles Terminal Area Aircraft North of TBC, HEC, PGS

Kansas City Terminal Area

MESSI

Miami Terminal Area

Minneapolis Terminal Area

Memphis Terminal Area Naples, FL

Nashville New Orleans Terminal Area

Oakland

II A KATTS PAMMY

Orlando Terminal Area

airspace

Aircraft through ZHU airspace remain south of ZME/ZTL

REANA KATTS PAMMY Aircraft from north of ILC, JOPER PAMMY KATTS PAMMY Aircraft over or south of ILC, REANA KATTS PAMMY GADAY Q108 CLAWZ LEESE-STAR

OTK LEESE-STAR

NW. 23 SEP 2010 to 18 NOV 2010

CCT, GHM, GUITR, TINGS, VOLLS BLUEZ, GPT, LCH, MCB, TBD, FATSO Aircraft over or south of a line ILC J16 DVC

CEW DEFUN Q104 PLYER PIKKR (RNAV)-STAR

Aircraft from north, west, south,

CEW DEFUN Q104 CYY DEEDS (RNAV)-STAR SZW HEVVN Q104 CYY DEEDS (RNAV)-STAR

Aircraft South of TBC from ZAB airspace, HIPPI,

Aircraft through ZHU airspace remain south ZME and ZTL a

ARG, BWG, FSM, PXV, LIT, RZC, SQS, VUZ, BNA, GQO, ELD Aircraft through ZHU AIRSPACE remain south of ZME and Z

SZW HEVVN Q104 PLYER PIKKR (RNAV)-STAR

HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING

airspace

CORKR DRK

GUP ٥r

or

or

CEW DEFUN Q112 INPIN GULLO (RNAV)-STAR

SZW INPIN GULLO (RNAV)-STAR

Aircraft from ZDV airspace.

Aircraft from ZAB airspace, ZUN, MOHAK, SSO **VYLLA TUS**

FLG. SSO. MOHAK VYLLA, TUS

ARNIT BONVL-STAR

LARNO BONVL-STAR

MOXEE MOXEE-STAR

Aircraft through ZHU airspace remain south of ZME and ZTL

Palm Beach, FL

Phoenix Satellites

Portland, OR Terminal Area

Phoenix

St. Louis Terminal Area SGF TRAKE-STAR BUM TRAKE-STAR or ANX TRAKE-STAR LMN IRK RIVRS-STAR RBS VANDALIA-STAR Salt Lake City Terminal Area JNC J12 HELPR SPANE-STAR EKR MTU SPANE-STAR BCE DTA-TCH ٥r MLF DTA-TCH BVL BONNEVILLE-STAR BYI BEARR-STAR or PIH BEARR-STAR DBS BRIGHAM CITY-STAR JAC BRIGHAM CITY-STAR or BPI BRIGHAM CITY-STAR OCS BRIGHAM CITY-STAR San Diego Terminal Area EED. LAX. GBN HEC. PGS. BLD. HIPPI Santa Ana San Antonio Terminal Area IDU, CSI, JCT, LLO, CRP, LRD or West of a north-south line at LFK, BLEWE East of a north-south line at LFK, IDU NW. 23 SEP 2010 to 18 NOV 2010

252	HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING
San Francisco	FMG GOLDEN GATE-STAR
	or
	MVA MODESTO-STAR
	or
	ENI GOLDEN GATE-STAR
	or
	OAL MODESTO-STAR
	or
	South of a line ILC to DVC.

REANA KATTS OAL MODESTO-STAR

FMG HYP EL NIDO-STAR OAL HYP EL NIDO-STAR ENLIGOLDEN GATE-STAR

S

San Jose

Seattle Terminal Area

Southwest Florida Airports

Tampa Terminal Area

RSW and FMY

Tucson

South of a line ILC to DVC, REANA KATTS KICHI CANDA EL NIDO-STAR Aircraft From northeast, southeast, south,

TEMPL GLASR-STAR or SUNED CHINS-STAR or BTG OLMYPIA-STAR

airspace

or or or

airspace SZW DARBS-STAR DRK PXR MOHAK GBN

CEW DEFUN 0104 SWABE JOSFF-STAR Aircraft through ZHU airspace remain south of ZME and Z SZW HEVVN Q104 SWABE JOSFF-STAR CEW DEFUN Q104 HEVVN DARBS-STAR Aircraft through ZHU airspace remain south of ZME and Z

VISUAL FLIGHT RULES (VFR) WAYPOINTS VFR Waypoint names consist of five letters beginning with "VP". Stand-alone VFR Waypoints are portrayed on VFR Charts

using the same four-point star symbol currently used for Instrument Flight Rules (IFR) Waypoints.

VFR Waypoints collocated with Visual Checkpoints (Visual Reporting Points) are portrayed with a Visual Check Point flag The VFR Waypoint name is shown in parentheses adjacent to the Visual Check Point name.

VFR Waypoint names are not intended to be pronounceable and shall not be used in ATC communications.

CAUTION: GPS accuracy necessitates extra vigilance for other aircraft when navigating near any fix retrieved from a GPS database. BALTIMORE-WASHINGTON TERMINAL AREA CHART/FLYWAY CHART

OOLLOOATED VED OUTOVDOINT

WATFUINT IDENT	COLLOGATED VFK CHECKFOINT	LUCATION
VPAXI		N38°34.57′/W076°20.38′
VPONX		N39°06.65′/W076°55.92′
VPOOP		N38°56.32′/W076°36.90′
	BOSTON HELICOPTER CHART	
VPBAY		N42°16.17′/W070°49.48′
VPBLT		N42°19.67'/W070°53.40'
VPCGS		N/12°22 08' /W071°03 13'

N42°22.08′/W071°03.13

VPCGS **VPEVS** VPFFN

VPFRF

VPGVI VPHΔM **VPPIK**

VPOUA VPOUB VPSPF VPTOR

VPWAN **BOSTON TERMINAL AREA CHART**

COHASSET CLITTYHLINK HARROR

VPCOH

FRAMINGHAM SHOPPING CENTER

VPCHT WOODS HOLE HIIII

VPFRA **VPHOL** VPHIII VPLPT NANTUCKET GREAT POINT

WAYDOINT IDENT

VPNFD NEEDHAM TOWERS \/DDFA **VPROC**

PEABODY SHOPPING CENTER ROCKINGHAM RACE TRACK SCITUATE NANTUCKET THIRD POINT

VPSCI VPTPT VPTUC TUCKERNUCK WAKEFIELD WANG TOWERS

VPWΔK VPWAN CHARLOTTE SECTIONAL CHART

VPATO VPAVA **VPRFF** VPRRA

VPGCF **VPGHI**

VPMAR

VPGIO VPK III **VPLMN**

VPNIPO

VPOKY

VPREP

VPRRS

VPUMO

VPWZO

VP7IF

ISLE OF DALMS

N42°23.52'/W071°04.10' N42°12.58'/W071°08.88' N42°25.03'/W071°12.32' N42°21.88'/W070°52.18' N42°30.13′/W071°07.15′ N42°20.37'/W071°15.93' N42°12.10′/W071°04.78′

N42°12.60'/W070°59.83' N42°24.20'/W071°09.47' N42°31.42′/W070°59.82′ N42°36.88'/W071°19.45'

N42°13.58'/W070°48.94' N41°25.50'/W070°55.03' N42°18.16'/W071°23.65' N41°31.06'/W070°40.60' N42°18.20′/W070°55.30′ N41°23.41'/W070°02.78' N42°18.51'/W071°14.64'

N42°32.52'/W070°56.69' N42°46.29'/W071°13.57' N42°11.89'/W070°43.69' N41°18.51'/W070°03.37' N41°18.31'/W070°15.43' N42°30.72′/W071°05.24′ N42°36.88'/W071°19.45'

N34°37.37'/W076°31.47'

N34°57.00′/W077°16.50′

N32°16.38'/W080°47.50' N36°13.75'/W076°08.08'

N36°03.90'/W076°36.42'

N35°15.30'/W075°31.25'

N35°32.50'/W076°37.33'

N35°26.58'/W076°10.22'

N34°55.43'/W077°46.42'

N34°42.20'/W077°03.50' N32°47.78′/W079°46.45′

N35°06.53'/W075°59.17'

N32°33.98'/W080°21.82'

N33°25.45'/W079°07.60'

N35°35.63'/W075°28.08'

N36°00.87'/W075°40.07'

N32°01.62'/W080°53.42'

254

WAYPOINT IDENT

VPBEN

VPFTG

VPNIC

VPRWY

VPDTN

VPGI A **VPGLB**

VPKTY

VPPI N

VPRSN

VPKER

VPLEV

VPLJA

VPMAI

VPTLH

VPXZY

VPYIW

VPZIE

VPAGO

VPDEN

VPENE

VPESS

VPFMF

VPGXY

VPMRF

VPMKF **VPROV**

VPUTT

DENVER TERMINAL AREA CHART/FLYWAY CHART

NORTH INTERCHANGE N39°58.90′/W104°59.27

VFR WAYPOINTS

HOUSTON TERMINAL AREA CHART/FLYWAY CHART COLLOCATED VFR CHECKPOINT LOCATION

N29°46 25'/W095°09 24 N29°46.59'/W095°22.01 N30°08.32'/W095°06.62

N30°07.80'/W094°55.70 N29°47.05'/W095°44.92

N30°08.80'/W095°50.42 N29°30.00′/W095°41.00

VPSND N29°23.13'/W095°28.86 N29°49.29'/W094°53.94 VPSNT N29°47.48′/W095°03.34 **VPTNE**

VPTNW N29°47.06′/W095°33.81

N29°24.06′/W095°10.44 JACKSONVILLE SECTIONAL CHART

VPAFI N31°49.35'/W081°51.07 N30°07.00′/W081°21.33 VPBEC N29°46.25'/W081°15.10

N29°30.00′/W081°06.00 **VPCJA** N28°46.50'/W082°34.00 N28°30.00′/W080°45.00

VPCKY VPCNY **VPDAD** DADE CITY N28°22.57'/W082°11.25 N31°22.38'/W081°24.13 N29°00.17'/W081°20.85

VPDAR VPDFI VPDIJT CLEARWATER BEACH **VPEAR**

VPEGV VPFFU

ST PETE BEACH

VPHUC **VPIWA** MIDWAY **VPJMY**

LAKE PARKER

KANSAS CITY SECTIONAL CHART

N37°50.33'/W090°29.03 N37°15.07'/W092°30.67 N37°46.75′/W092°19.20 N37°44.75′/W091°55.78

N30°42.28'/W081°27.25 N32°01.62'/W080°53.42

N27°37.70′/W082°09.10

N27°58.67'/W082°49.83

N29°39.97'/W081°24.87

N28°57.08'/W081°00.33

N27°43.50′/W082°44.67 N30°04.02′/W083°40.02

N28°19.87'/W082°43.77 N31°48.33′/W081°25.85

N29°26.92'/W081°18.27

N28°04.00'/W081°56.00

N28°48.00'/W080°52.00

N29°00.00'/W080°51.00

N30°50.02'/W084°56.63

N30°32.70′/W083°52.22

N29°35.00′/W083°10.00

N38°01.72′/W091°12.81

N37°52.05′/W092°01.20

N39°44.28'/W104°26.00

N39°44.35'/W104°32.75

N36°59.48'/W091°00.88 N37°41.00′/W092°38.33

N37°15.50′/W091°40.17 N37°11.08′/W090°27.92 N37°24.47'/W092°40.00

255

WAYPOINT IDENT VPWOC	COLLOCATED VFR CHECKPOINT	LOCATION N37°18.03'/W092°18.63'
VPWRO		N37°39.12′/W091°45.68′
VPXIZ		N37°26.60′/W092°05.42′
	KANSAS CITY TERMINAL ARE	A CHART
VPATN	ATCHISON	N39°33.62′/W095°07.65′
VPBGS	BLUE SPRINGS	N39°01.82′/W094°16.32′
VPBSP	BONNER SPRINGS	N39°03.78′/W094°53.10′
VPCHB	CHOUTEAU BRIDGE	N39°08.77′/W094°32.03′
VPDS0	DE SOTO	N38°58.68'/W094°58.48'
VPESG	EXCELSIOR SPRINGS	N39°20.68′/W094°13.77′
VPGTB	GARRETSBURG	N39°40.92′/W094°41.45′
VPLAT	LATHROP WATER TANK	N39°32.87'/W094°20.00'
VPLEN	LENEXA	N38°57.77′/W094°43.68′
VPLVL	LONGVIEW LAKE	N38°54.63′/W094°28.28′
VPMCL	MC LOUTH	N39°11.65′/W095°12.50′
VPNHA	NASHUA	N39°17.83′/W094°34.80′
VPSCX	SPORTS COMPLEX	N39°03.00′/W094°29.02′
VPSKR	SUGAR CREEK REFINERY	N39°07.00′/W094°27.02′
VPSPK	SWOPE PARK	N39°00.47′/W094°31.93′
VPTSK	TWIN STACKS	N39°09.05′/W094°38.22′
VPWOF	WORLDS OF FUN	N39°10.42′/W094°29.12′
	KLAMATH FALLS SECTIONAL	CHART
VPORO		N43°57.38′/W123°02.22′
	LOS ANGELES HELICOPTER	CHART
VPANA	LOS ANGLES HELIOOFTEN	N33°44.43′/W117°50.03′
VPART	MAGNOLIA	N33°51.45′/W117°58.92′
VPAUT	HWY 91 & 55	N33°50.63′/W117°49.57′
VPBOB	11111 31 4 33	N33°59.60′/W117°21.45′
VPCAR		N33°49.90′/W118°17.23′
VPCNG	CONEJO GRADE US HWY 101	N34°12.54′/W118°59.61′
VPCOR	0011230 divide 00 1111 101	N33°52.90′/W117°32.95′
VPCRX		N34°01.40′/W117°44.88′
VPCSU	CSU CHANNEL ISLANDS	N34°09.76′/W119°02.53′
VPDOW		N33°56.47′/W118°05.80′
VPELA		N34°00.98′/W118°10.35′
VPETY		N33°38.70′/W117°44.12′
VPFCB		N34°02.03′/W118°01.63′
VPFPL	OXNARD FINANCIAL PLAZA	N34°13.71′/W119°10.39′
VPGOL		N34°09.33′/W118°17.37′
VPIMP		N33°55.85′/W118°16.85′
VPKAT		N33°48.23′/W117°54.22′
VPKEL		N34°03.92′/W117°48.40′
VPLAC		N34°03.75′/W118°14.93′
VPLLU		N34°03.85′/W117°17.82′
VPLQM	QUEEN MARY	N33°45.17′/W118°11.37′
VPLRT	SANTA ANITA RACE TRACK	N34°08.45′/W118°02.65′
VPLVT	VINCENT THOMAS BRIDGE	N33°44.97′/W118°16.32′
VPMDR		N33°59.27′/W118°23.97′
VPNEW	NEWHALL PASS	N34°20.18′/W118°30.72′
VPNUY		N34°09.63′/W118°28.18′
VPPCH		N33°28.07'/W117°40.32'
VPPKC		N34°03.32′/W118°12.83′
VPPOR		N34°00.10′/W117°50.12′
VPRRT		N33°59.37′/W118°16.83′
VPSEP		N34°05.80′/W118°28.63′
VPSFR		N34°17.45′/W118°28.07′
VPSTC	SATICOY BRIDGE	N34°16.62′/W119°08.34′
VPSTK		N34°13.97′/W118°24.60′
		,

LOS ANGELES SECTIONAL CHART

256

VPCNG

VPCSU

VPGTY

VPLBP

VPLCC

VPI CP

VPLDL

VPI DP

VPI DS

VPLFX

VPLGP

VPLHF

VPLHP

VPI KH

VPLLC

VPLLM

VPLMM

VPLMS

VPI PD

VPI PP

VPLOM

VPI RR

VPLRT

VPLSF

VPI SP

VPLSR

VPI SS

VPLTW

VPLVT VPI WT

VPNFW

VPSTC

VPACH

VPBOV VPCLE

VPCTF

VPDAD

VPDIJT

VPDZE VPEAR

VPEDY

VPFAH

VPGPE

VPHRO

VPHUC

VPIBR

VPKER

VPKOE

VPLYY

VPMRO

VPOBA

VPRBI

VPRNL

VPWMO

COLLOCATED VFR CHECKPOINT

VFR WAYPOINTS

WAYPOINT IDENT CONEJO GRADE US HWY 101 VPCNG **VPCSU** CSU CHANNEL ISLANDS

VPFPL OXNARD FINANCIAL PLAZA

SATICOY BRIDGE LOS ANGELES TERMINAL AREA CHART/FLYWAY CHART

CONEJO GRADE US HWY 101

VPSTC

GETTY CENTER

BANNING PASS

CAJON PASS

DISNEYLAND

DANA POINT

CHAFFEY COLLEGE

DODGER STADIUM

110/405 FWYS

KING HARBOR

L.A. COLISEUM

LAKE MATHEWS

PRADO DAM

QUEEN MARY

ROSE BOWL

MAGIC MOUNTAIN

MILE SQUARE PARK

PACIFIC PALISADES

SANTA ANA CANYON

SANTA SUSANA PASS

STATE COLLEGE

SIGNAL PEAK

WATER TANK

DADE CITY

NEWHALL PASS

SATICOY BRIDGE

HOLLYWOOD BEACH

CLEARWATER BEACH

ANDYTOWN TOLLGATE

ST PETE BEACH

LAKE PARKER

GULFSTREAM PARK

PUMPING STATION

RANGER STATION

NW. 23 SEP 2010 to 18 NOV 2010

SANTA FE FLOOD BASIN

SANTA ANITA RACE TRACK

SAN FERNANDO RESERVOIR

HAWTHORNE & 405 FREEWAY

TUJUNGA WASH & FOOTHILL

MIAMI SECTIONAL CHART

VINCENT THOMAS BRIDGE

HUNTINGTON PIER

91/605 INTERCHANGE

GRIFFITH PARK OBSERVATORY

CSU CHANNEL ISLANDS

LOCATION

N34°09.76'/W119°02.53 N34°13.71′/W119°10.39 N34°16.62′/W119°08.34

N34°12.54′/W118°59.61

N34°09.76'/W119°02.53 N34°04.84'/W118°28.66

N34°12.54′/W118°59.61

N33°56.05'/W116°59.63

N34°08.87'/W117°34.33 N34°18.07'/W117°27.68 N33°48.72'/W117°55.13

N33°27.62'/W117°42.87 N34°04.42′/W118°14.42

N33°50.58'/W117°26.85

N34°26.20′/W118°36.28 N33°43.40′/W117°56.77

N33°53.40′/W117°38.48

N34°02.13'/W118°32.15 N33°45.17'/W118°11.37

N34°09.67'/W118°10.05

N34°08.45′/W118°02.65

N33°52.03'/W117°42.68

N34°07.72′/W117°57.30

N33°52.97'/W117°53.13

N34°17.87'/W118°29.00

N33°36.33'/W117°48.63

N33°53.07'/W118°21.13

N34°16.00′/W118°38.43

N34°16.40′/W118°20.30

N33°44.97'/W118°16.32

N34°10.82'/W118°46.27

N34°20.18'/W118°30.72

N34°16.62′/W119°08.34

N26°00.92'/W080°06.93 N27°57.00′/W080°46.75

N26°27.07'/W082°00.88

N26°09.28'/W081°20.70

N28°22.57'/W082°11.25

N27°37.70′/W082°09.10 N27°19.00′/W080°44.17

N27°58.67'/W082°49.83

N26°08.78'/W080°28.00

N26°25.40′/W081°29.67

N27°43.50′/W082°44.67

N27°05.97'/W082°12.20

N28°19.87'/W082°43.77

N27°12.47′/W081°40.22

N28°04.00'/W081°56.00

N24°40.08'/W081°20.55

N24°49.07'/W080°49.17

N25°58.57'/W080°08.17

N26°28.30'/W080°26.75

N25°50.67'/W080°55.18

N25°22.92'/W080°36.58

N27°03.00'/W080°35.00

N33°52.38'/W118°06.08 N34°07.10′/W118°18.02 N33°51.42′/W118°17.10

N33°39.32'/W118°00.25 N33°50.75′/W118°23.88 N34°00.83'/W118°17.27

N30°54.85'/W087°57.82'

N30°49.65'/W089°07.42'

N30°19.93'/W087°08.50'

N38°47.17'/W090°39.25'

257

MIAMI TERMINAL AREA CHART/FLYWAY CHART COLLOCATED VFR CHECKPOINT

HOLLYWOOD BEACH N26°00.92'/W080°06.93'

VPACH VPFDY ANDYTOWN TOLLGATE N26°08 78' /W080°28 00'

WAYPOINT IDENT

VPRNL

VPGPT

VPLIP

VPMAI

VPMOR

VPR AM

VPRER VPRIV

VPSAW

VPTHR

VPJAY

VPI YD VPROK

VPALL

VPAOU

VPAZM

VPRAR

VPCCC

VPOTR

VPRVC

VPSMC

VPSOP

VPSSS

VPSTN

VPSTT

VPZZZ

VPAGN

VPBPE

VPCJY

VPCOJ

VPDFA

VPFA7

VPEDZ

VPEGR

VPEOX

VPMRO GIII ESTREAM PARK N25°58.57′W080°08.17′ PUMPING STATION VPORA N26°28.30'/W080°26.75' VPRRI N25°50.67'/W080°55.18'

> RANGER STATION N25°22.92'/W080°36.58'

NEW ORLEANS SECTIONAL CHART

N30°25.95'/W089°05.62' PHILLIPS INLET N30°16.23'/W085°59.25'

N30°50.02'/W084°56.63'

N30°23.00′/W088°31.72′ N30°18.95′/W089°35.88′

N30°13.87′/W085°20.67′

NEW YORK HELICOPTER CHART

N40°59.00'/W073°07.00' N40°57.37'/W073°29.59'

N40°52.70′/W073°44.24′

PHOENIX TERMINAL AREA CHART/FLYWAY CHART

N33°20.97'/W112°35.20'

AQUEDUCT PUMPING STATION N33°40.05'/W112°41.38'

ARROWHFAD MALL

VPARM N33°38.52'/W112°13.48' VPAWG AHWATUKEE GOLF COURSE N33°19.98'/W111°59.08'

ARIZONA MILLS N33°23.43'/W111°57.88'

BARTLETT DAM N33°49.10'/W111°37.92'

COUNTRY CLUB & CANAL N33°30.73'/W111°50.37' N33°33.23'/W111°46.89° CANAL

VPCNL **VPFRB** FIREBIRD LAKE N33°16.35'/W111°58.10'

VPFTN FOUNTAIN HILLS N33°36.12'/W111°42.72'

VPGLX GILA CROSSING N33°16.55'/W112°10.08'

VPGPP GLENDALE POWER PLANT N33°33.27'/W112°13.00'

VPMAR MARICOPA N33°03.42'/W112°02.88' **VPMHS** MESOUITE HIGH SCHOOL N33°20.53'/W111°49.58'

VPNRV N33°55.08'/W112°08.45' NFW RIVER VPNITT NORTH TEST TRACK N33°03.50'/W111°55.83' **VPPIR**

N33°22.52'/W112°18.90' **OUINTERO GOLF COURSE** N33°49.53'/W112°23.58'

RIO VERDE COMMUNITY N33°44.37'/W111°39.62' SOUTH MOUNTAIN COLLEGE N33°23.02'/W112°02.12'

SOLIAW PEAK N33°32.83'/W112°01.27' SUPERSTITION SPRINGS MALL N33°23.50'/W111°41.37'

N33°09.23'/W111°40.92' SANTAN MOUNTAINS SOUTH TEST TRACK N32°56.25'/W111°59.67'

N33°20.18'/W111°26.53'

ST LOUIS TERMINAL AREA CHART/FLYWAY CHART

TV ANTENNA N38°32.08'/W090°22.42'

N38°23.80'/W090°20.38'

HOLIDAY SHORES N38°55.00'/W089°56.00'

N39°00.28'/W090°41.23'

WINFIELD DAM IFFFFRSON BARRACKS BRIDGE N38°29.18'/W090°16.47'

N38°37.43'/W090°11.55' BUSCH STADIUM

WATER TANKS N38°45.30'/W090°34.87' **GAS TANKS** N38°35.80'/W090°19.32'

ST PETERS

258 VFR WAYPOINTS WAYPOINT IDENT COLLOCATED VER CHECKPOINT VPFAI HOWELL ISLAND

> WATERLOO N38°20.00′/W090°09.00 HORSESHOE LAKE N38°41.00′/W090°05.00 N38°29.00′/W090°44.00 PACIFIC ST CHARLES N38°47.00′/W090°30.00 N38°30.67'/W090°40.47

WOOD RIVER REFINERIES WENTZVILLE **IFRSFYVILLE** FOREST PARK COLLIMBIA MILLSTADT MOSENTHEIN ISLAND

SALTAIR BARN

SOUTH INTERCHANGE STATE CAPITOL

CAUSEWAY

BINGHAM COPPER MINE

PARLEYS CANYON

FRANCIS PEAK

KSI ANTENNA

GARFIELD STACK

SPAGHETTI BOWL

JORDAN RIVER TEMPLE

MCKAY DEE HOSPITAL

MICROWAVE TOWERS

GRAIN FLEVATOR

POWER STATION

PROVO CANYON

WEBER CANYON

SOUTH TIP

BARN

PROMONTORY POINT

POINT OF THE MOUNTAIN

I-15/I-80 INTERCHANGE

SOUTH INTERCHANGE

BINGHAM COPPER MINE

CENTERVILLE INTERCHANGE

NW. 23 SEP 2010 to 18 NOV 2010

STATE CAPITOL

CAUSEWAY

PARLEYS CANYON

FRANCIS PEAK

GARFIELD STACK

FREE PORT CENTER

STATE PRISON

LAGOON AMUSEMENT PARK

FREE PORT CENTER

CHAIN OF ROCKS BRIDGE

SALT LAKE CITY HELICOPTER CHART

N38°27.50′/W090°05.68 N38°43.00′/W090°12.25

N40°44.85'/W112°11.22 N40°38.18'/W111°54.23 N40°54.28'/W112°10.15 N40°46.67'/W111°53.25 N40°42.28'/W112°05.92

LOCATION

N38°40.00′/W090°43.00 N38°55.37′/W090°17.30

N38°35.60′/W090°26.92

N38°32.30′/W090°27.80

N38°45.88'/W090°10.42

N38°37.50′/W090°11.00

N38°50.00′/W090°05.00

N38°48.83'/W090°50.98

N39°07.00′/W090°20.00

N38°38.00′/W090°17.00

N38°27.00′/W090°12.00

N40°31.38'/W112°09.00 N41°05.37'/W112°07.17

N40°42.67'/W111°48.10 N41°05.92′/W112°02.27 N41°01.98'/W111°50.30 N40°43.28'/W112°11.88 N40°43.50′/W111°54.22 N40°35.02'/W111°55.58 N40°46.80'/W112°05.80 N40°59.08'/W111°53.57

N41°11.50′/W111°57.08 N40°48.50′/W111°53.37 N41°01.67'/W112°02.47 N40°50.15'/W111°54.90

N41°03.57'/W112°14.23 N41°13.13′/W112°00.45 N41°20.38'/W112°02.78 N40°29.88'/W111°53.62 N41°12.28′/W112°25.73

N40°27.42′/W111°54.83 N40°18.77'/W111°39.45 N40°48.48′/W112°00.33 N40°45.83'/W111°54.85

N40°50.93'/W112°10.92 N41°08.17'/W111°54.83 N40°38.00′/W112°03.33

SALT LAKE CITY TERMINAL AREA CHART/FLYWAY CHART N40°44.85'/W112°11.22 N40°38.18'/W111°54.23 N40°54.28'/W112°10.15

N40°46.67'/W111°53.25

N40°42.28'/W112°05.92

N40°31.38′/W112°09.00

N40°55.30′/W111°53.43

SIX FLAGS GATEWAY ARCH

VPKNY **VPLES** VPNSY VPN7Y

VPFFY **VPGPF**

VPGVI

VPHRO

VPIRO

VP IMII

VPRA7

VPRMO

VPWKO

VPXXI

VPYID

VPAIR

VPBEE

VPRRN

VPCAP

VPCHS

VPCOP

VPFPK

VPGFS

VPHVF

VPJRT

VPKSL

VPLGN

VPMDH

VPMMT

VPMSH

VPNTP

VPOGE

VPOPS

VPPFN

VPPPT

VPPTM

VPPVO

VPRWY

VPSLC

VPTIP

VPWBR

VPAIR

VPRFF

VPBRN

VPCAP

VPCHS

VPCOP

VPCVI

VPCYN

VPFPC.

VPFPK

VPGFS

JORDAN RIVER TEMPLE

MCKAY DEE HOSPITAL

MICROWAVE TOWERS

LAGOON AMUSEMENT PARK

SPAGHETTI BOWL

KSL ANTENNA

VPHVE

VPIRT

VPKSL

VPLGN

VPMDH

VPMMT

VPMSH

VPNSI

VPNTP

VPOGE

VPPFN V/PPPT

VPPTM

VPPV0

VPRWY

VPSBC

VPSRI

VPSRM

VPSCF

VPSCM

VPSCR

VPSFR

VPSLI

VPSMB

VPSMP

VPSMS

VPSMV

VPSMW

VPSOP

VPSOT

VPSPL

VPSPP

VPSOS

VPSRT

VPSSM

VPSSV

VPSTP

VPSVA

VPKBG

VPALT **VPANT**

VPRRR

VPCAL

VPCRT

VPCOY **VPCOZ**

VPCRL

VPCRY

GRAIN ELEVATOR POWER STATION STATE PRISON

PROMONTORY POINT POINT OF THE MOUNTAIN PROVO CANYON

VPSLC VPTIP

VPHOH VPWRR **VPWBT** VP700 VPLDP **VPLSP** VPOCN

I-15/I-80 INTERCHANGE

SOUTH TIP

HOGLE ZOO DANA POINT SIGNAL PEAK

SAN DIEGO TERMINAL AREA CHART/FLYWAY CHART BARONA CASINO BLACK MOUNTAIN

COWLES MOUNTAIN

CRYSTAL PIER

IRON MOUNTAIN

LAKE JENNINGS

MOUNT SOLEDAD

MOUNT WOODSON

OTAY MESA PRISON LOWER OTAY LAKE

SOUTH POINT LOMA

OUALCOMM STADIUM

DEL MAR RACE TRACK

SAN VICENTE ISLAND

KINGSBURY GRADE

ALTAMONT PASS

ANTIOCH BRIDGE

BENICIA BRIDGE

LAKE CHAROT

COYOTE HILLS

CAROUINEZ BRIDGE

CALAVERAS RESERVOIR

CRYSTAL SPRINGS CAUSEWAY

SAN MIGUEL MOUNTAIN

TORREY PINES GOLF COURSE

SAN FRANCISCO SECTIONAL CHART

NW. 23 SEP 2010 to 18 NOV 2010

POWER PLANT

U OF U EVENTS CENTER WEBER CANYON

N40°45.83'/W111°54.85'

N40°50.93'/W112°10.92' N40°45.73'/W111°50.28' N41°08.17'/W111°54.83'

N32°58.87'/W117°07.00'

N32°48.55'/W117°09.17'

N32°48.72'/W117°01.97'

N32°41.78'/W116°56.18'

N32°55.53'/W116°55.00'

N32°54.17'/W117°14.68'

N33°11.48'/W117°16.38'

N38°58.75'/W119°53.20'

N38°03.66'/W122°13.52'

N37°11.00′/W121°41.06′

N37°30.56'/W122°21.10'

N40°43.50′/W111°54.22′

N40°35.02'/W111°55.58'

N40°46.80'/W112°05.80'

N40°59.08'/W111°53.57'

N41°11.50′/W111°57.08′

N40°48.50′/W111°53.37′

N41°01.67'/W112°02.47'

N40°50.15'/W111°54.90'

N41°03.57'/W112°14.23'

N41°13.13'/W112°00.45'

N41°20.38'/W112°02.78'

N40°29.88'/W111°53.62'

N41°12.28'/W112°25.73'

N40°27.42'/W111°54.83' N40°18.77'/W111°39.45'

N40°48.48'/W112°00.33'

N40°38.00'/W112°03.33' N40°45.00'/W111°48.95' N33°27.62'/W117°42.87' N33°36.33'/W117°48.63' N33°14.15'/W117°26.63' N32°56.25'/W116°52.60' N33°05.18'/W117°18.55'

N32°47.77'/W117°15.42' N32°39.37'/W117°07.30' N32°58.25'/W116°57.33'

N32°51.53'/W116°53.28' N32°45.57'/W117°12.22' N33°22.70'/W117°36.75'

N32°50.40'/W117°15.10' N32°45.75'/W117°09.80' N33°00.52'/W116°58.23' N32°35.82'/W116°55.28' N32°37.73'/W116°55.38' N32°39.90'/W117°14.55' N33°08.25'/W117°20.23'

N32°46.98'/W117°07.23' N32°58.58'/W117°15.95'

SAN FRANCISCO TERMINAL AREA CHART/FLYWAY CHART N37°44.35'/W121°35.42' N38°01.45'/W121°45.02' N38°02.50'/W122°07.45' N37°28.16'/W121°48.93' N37°43.68'/W122°06.94' N37°32.50'/W122°05.06'

260 VFR WAYPOINTS WAYPOINT IDENT COLLOCATED VER CHECKPOINT LOCATION **VPCSH** CAL STATE UNIVERSITY N37°39.52′/W122°03.52 VPDΔM DEL VALLE DAM N37°36.91'/W121°44.78 **VPDLR** N37°07.00'/W121°47.06 **VPDUB** DUBLIN N37°42.06'/W121°55.36 **VPEMB** EMBASSY SUITES N37°26.05'/W121°53.83 VPGGF GOLDEN GATE FIELDS N37°53.07'/W122°18.71 VPGII N37°01.37'/W121°33.99 GILROY N38°03.58'/W122°30.66 **VPHHH** HAMII TON **VPKGO** KGO N37°31.58'/W122°06.10 VPLEX LEXINGTON RESERVOIR N37°11.66′/W121°59.18 **VPMID** MID-SPAN SAN MATEO BRIDGE N37°36.28'/W122°11.81 N37°48.46′/W122°11.95 VPMOR MORMON TEMPLE VPNIIM NUMMI PLANT N37°29.56'/W121°56.58 **VPPAC** N37°38.00′/W122°32.07 **VPPRU PRUNEYARD** N37°17.33'/W121°56.01 VPSAR N37°15.26′/W122°02.33 SARATOGA **VPSLA** SLAC/LINEAR ACCELERATOR N37°24.75'/W122°14.35 **VPSTB** STINSON BEACH N37°54.45′/W122°40.41 VPSUN SUNOL GOLF COURSE N37°34.85'/W121°53.23 **VPUTC** UTC N37°13.93'/W121°41.35 **VPWAL** WALNUT CREEK N37°53.78'/W122°04.30 VPWAM N37°30.28'/W122°10.00 **VPWFR** CEMENT PLANT N37°30.88'/W122°12.26 TAMPA/ORLANDO TERMINAL AREA CHART/FLYWAY CHART N27°57.00′/W080°46.75 N28°30.00′/W080°45.00 DADE CITY N28°22.57'/W082°11.25

VPBOV VPCNY VPDAD N29°00.17'/W081°20.85 VPDFI VPDIJT N27°37.70′/W082°09.10 **VPEAR** CLEARWATER BEACH N27°58.67'/W082°49.83 **VPFFU** N28°57.08'/W081°00.33 ST PETE BEACH **VPGPE** N27°43.50'/W082°44.67 N28°19.87'/W082°43.77 VPHLIC **VPKER** LAKE PARKER N28°04.00'/W081°56.00 **VPLEV** N28°48.00'/W080°52.00 **VPLJA** N29°00.00'/W080°51.00

WASHINGTON SECTIONAL CHART

 VPACE
 N38°07.82′/W076°48.75

 VPAXI
 N38°34.57′/W076°20.38

 VPBRA
 N36°13.75′/W076°08.08

 VPGCE
 N36°03.90′/W076°36.42

 VPWZO
 N36°00.87′/W075°40.07

VOR RECEIVER CHECKPOINTS **AND VOR TEST FACILITIES (VOT)**

The use of VOR airborne and ground checkpoints is explained in Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

Pocatello (Pocatello Rgnl)

Facility Name

(Airport Name)

Facility Name (Arpt Name)

Twin Falls (Joslin Fld-Magic Valley Rgnl) 115.8/TWF

Boise (Boise Air Terminal-Gowen Field).... 116.7

Billings.....

Bozeman (Gallatin Fld)

Coppertown (Bert Mooney).....

Great Falls (Great Falls Intl)

Havre.....

Helena (Helena Rgnl).....

Kalispell (Glacier Park Intl).....

NOTE: Under columns headed "Type of Checkpoint" & "Type of VOT Facility" G stands for ground, A/ stands for airborne followed by figures (2300) or (1000-3000) indicating the altitudes above mean sea level at which the check should be conducted. Facilities are listed in alphabetical order, in the state where the checkpoints or VOTs are located.

IDAHO

Type Check

VOR RECEIVER CHECKPOINTS

		Pt. Gnd.	from Fac.	from Fac.	
Facility Name (Arpt Name)	Freq/Ident	AB/ALT	Mag	N.M.	Checkpoint Description
Boise	113.3/BOI	A/5000	090	6.2	Over dam outlet S end Lucky Peak Reservoir
Boise (Boise Air Terminal-Gowen Field)	113.3/BOI	G	275	1.0	On twy C adjacent to the

Coeur D'Alene..... 108 8/C0F A/4000 011 Idaho Falls (Idaho Falls Rgnl)..... 113.85/IDA 208 G Nez Perce (Lewiston-Nez Perce County)..... 108.2/MQG

A/3000 247 112.6/PIH A/5800 034

Type VOT

Facility

Type Check

Pt

Gnd

AB/ALT

A/5000

G

G

A/6600

A/7000

G

G

A/4000

G

A/4000

NW. 23 SEP 2010 to 18 NOV 2010

MONTANA

Frea.

Freq/Ident

114.5/BIL

112.4/BZN

112.4/BZN

111.6/CPN

113.0/DLN

115.1/GTF

115.1/GTF

111.8/HVR

117.7/HLN

108.4/FCA

065

VOR TEST FACILITIES (VOT)

intersection of Twv B at apch end Rwy 28L.

Over amusement park.

and A3.

base.

Rwy 25.

At intersection of Twys A

Over tetrahedron on arpt.

On runup area at apch end

Remarks

Checkpoint Description

Over refinery at Laurel.

Twy at apch end Rwy 12.

On runup as at apch end Rwy 30.

Over intersection of Rwys 11-29 and 15-33.

On Twy A between A5 and

On Twy E on South side of

Over apch end Rwy 30.

Over letter 'B' on bluff.

At intersection of Twy A and A3.

Over S end of dam.

Rwv 27.

A6.

Over radio antenna with white storage tanks at

Dist.

from Fac

N.M.

10.5

0.5

1.0

11.5

5.0

2.3

29

8.0

0.7

64

VOR RECEIVER CHECKPOINTS

from

Fac

Mag

199

272

137

098

245

030

0.30

278

238

316

Azimuth

Dist.

9.0

6.2

8.7

0.8

Azimuth

Facility Name (Arpt Name)

Facility Name (Arpt Name)

Lewistown (Lewistown Muni)

Livingston.....

Astoria (Astoria Regional)

Baker.....

Corvallis (Corvallis Muni)

Eugene (Mahlon Sweet Field)

Klamath Falls (Klamath Falls).....

North Bend (North Bend Muni).....

Pendleton) Rogue Valley (Rogue Valley Intl)

Pendleton (Eastern Oregon Rgnl At

Miles City (Frank Wiley Field) 112.1/MLS

VOR RECEIVER CHECK

Azimuth

from

Fac.

Mag

075

237

036

344

Azimuth

from

Fac.

Mag

153

136

Dist

from

Fac.

N.M.

5.6

5.5

42

0.6

Dist.

from

Fac

N.M.

.5

6.7

Type Check

Pt

Gnd.

AB/ALT

A/5200

A/6500

G

G

Pt.

Gnd

AB/ALT

G

A/6000

G

G

G

G

G

A/3000

OREGON VOR RECEIVER CHECKPOINTS Type Check

Freq/Ident

112.0/LWT

116.1/LVM

Freq/Ident

114.0/AST

115.3/BKE

115.4/CVO

112.9/EUG

115.9/LMT

112.1/0TH

114.7/PDT

113.6/0ED

Roseburg (Roseburg Rgnl)		A/2500	337	3.0				
Wildhorse		A/6500	225	6.0				
V	OR TEST F	ACILITIES	(VOT)					
Facility Name		Type VOT						
(Airport Name)	Freq.	Facility						
Portland Intl	111.0	G						
Portland Hillsboro	115.2	G						
Rogue Valley Intl-Medford	117.2	G						
	WASHINGTON VOR RECEIVER CHECKPOINTS							
VC								
		Туре						
		Check	Azimuth	Dist.				
		Pt.	from	from				
	- "	Gnd.	Fac.	Fac.				
Facility Name (Arpt Name)	Freq/Ident	AB/ALT	Mag	N.M.				
Ellensburg (Bowers Field)	117.9/ELN	A/2300	255	3.5				
Ephrata (Ephrata Muni)	112.6/EPH	A/2300	202	5.8				
Hoquiam (Bowerman)	117.7/HQM	A/1100	062	8.4				
Whatcom (Bellingham Intl)	113.0/HUH	A/1700	162	5.4				
NW. 23	SEP 2010 1	o 18 NOV	2010					

049 071 0.5 tower. 298 1.0

254 073 213

0.5 3 1 3.9

4.8

Checkpoint Description East edge of ramp in front of large hangar. Over microwave tower on bluff. ramp.

On S edge of terminal On ramp immediately W of On ramp N of Twy E. On Twy E at compass rose

Checkpoint Description

Over apch end Rwv 07. Over northern most radio

On twy leading to Rwy 30.

Terminal ramp east of Twy

twr NE of city.

On twv B. Over radio tower. Over S end of Rwy 16-34. Over smoke stack.

Remarks

Unusable on Twy A-6, hangar area W of Twy

A-6 and Twy A NW of Twv C.

Checkpoint Description

Over W end of Rwy 07-25

Over Rwy 03 thld. Over centerline on apch end Rwy 06. Over Nooksack River/Interstate 5

Bridge.

155

194

313

350

173

098

197

308

107

VOR RECEIVER CHECK

Freq/Ident

115.0/MWH

115.0/MWH

116.8/SEA

116.8/SEA

Type Check

Pt.

Gnd.

AB/ALT

G

G

G

G

G

G

A/2000

A/2500

A/2000

Type Check

Pt

Gnd.

AB/ALT

A/6500

G

A/6400

A/5500

A/7500

G

G

A/5000

Azimuth

from

Fac.

Mag

180

174

204

116

093

052

129

Dist

from

Fac.

N.M.

25

0.5

13.4

49

5.5

8.0

2.3

5.0

Dist

from

1.4

1.2

1.0

0.3

0.8

1.1

27.0

19.5

10.3

Checkpoint Description

On runup area Rwv 32R.

On runup area Rwv 04.

On runup area Rwv 14L.

On E runup area Rwv 17.

Twv H.

area

On Twv A-7.

Over Nisqually River/Interstate 5 bridge.

end Rwv 33.

Intersection of Rwy 11 and

Twy Echo at Rwy 30 run-up

Over NW end of bridge and Hwy 305.

Over centerline on apch

263

112.2/TOU	A/2500	077	12.4	Over AER 08.
116.4/ALW	A/1500	225	5.6	Over largest hangar.
116.4/ALW	G	035	0.5	At the intersection of Twys A and C.
111.0/EAT	G	105	0.6	On Twy at apch end of Rwy 30.
116.0/YKM	A/3500	210	4.1	Over single tower on ridge line.
VOR TEST FA	ACILITIES	(VOT)		
	Type VOT			
Freq.	Facility			Remarks
108.6	G			
117.5	G			
114.0	G			
109.6	G			
WYC	OMING			
OR RECEIVE	R CHECKP	POINTS		
	116.4/ALW 116.4/ALW 111.0/EAT 116.0/YKM VOR TEST F/ Freq. 108.6 117.5 114.0 109.6 WYC	116.4/ALW A/1500 116.4/ALW G 111.0/EAT G 116.0/YKM A/3500 VOR TEST FACILITIES Type VOT Facility 108.6 G 117.5 G 114.0 G 109.6 G WYOMING	116.4/ALW A/1500 225 116.4/ALW G 035 111.0/EAT G 105 116.0/YKM A/3500 210 VOR TEST FACILITIES (VOT) Type VOT Freq. Facility 108.6 G 117.5 G 114.0 G 109.6 G	116.4/ALW A/1500 225 5.6 116.4/ALW G 035 0.5 111.0/EAT G 105 0.6 116.0/YKM A/3500 210 4.1 VOR TEST FACILITIES (VOT) Type VOT Freq. Facility 108.6 G 117.5 G 114.0 G 109.6 G WYOMING

Freq/Ident

117.8/BOY

115.4/JAC

116.2/DDY

108.2 ECS

109.4/RWL

109.4/RWL

116.0/0CS

115.3/SHR

Facility Name (Arpt Name)

Facility Name (Arpt Name)

Boysen Reservoir

Jackson (Jackson Hole)

Muddy Mountain (Casper/Natrona Co Intl)..

Newcastle (Mondell Fld).....

Rawlins (Rawlins Muni)

Rock Springs (Rock Springs-Sweetwater County).....

Sheridan (Sheridan County).....

Moses Lake (Grant County Intl).................. 115.0/MWH

Paine (Snohomish Co (Paine Fld)) 110.6/PAE

Seattle

Seattle

Checkpoint Description Over Riverton VOR. On Twy A. approximately 1,000' S of AER 19. Over intersection Rwys 03-21, 08-26 and 12-30 Over radio towers with strobe lights. Bridge over railroad track east of refinery. Runup area Rwy 22. Intersection twy to Rwy 09-27.

Over centerline approach end Rwv 14.

PARACHUTE JUMPING AREAS

The following tabulation lists all reported parachute jumping sites in the area of coverage of this directory. Unle otherwise indicated, all activities are conducted during daylight hours and under VFR conditions. The busiest periods activity are normally on weekends and holidays, but jumps can be expected at anytime during the week at the locatic listed. Jumps within restricted airspace are not listed.

All times are local and altitudes MSL unless otherwise specified.

Contact facility and frequency is listed at the end of the remarks, when available, in bold face type.

Refer to Federal Aviation Regulations Part 105 for required procedures relating to parachute jumping.

Organizations desiring listing of their jumping activities in this publication should contact the nearest FSS, tower ARTCC.

Qualified parachute jumping sites will be depicted on the appropriate visual chart(s).

Note: (c) in this publication indicates that the parachute jump area is charted.

To qualify for charting, a jump area must meet the following criteria:

- (1) Been in operation for at least 1 year.
- (2) Operate year round (at least on weekends).
- (3) Log 4,000 or more jumps each year.

In addition, jump sites can be nominated by FAA Regions if special circumstances require charting.

m addition, jump once can se m	ominated by FAA Regions if special of		quie onarting.
LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC	MAXIMUM ALTITUDE	REMARKS
	IDAHO		
Burley		15,000	Daily SR-SS.
(c) Caldwell Industrial Arpt		17,500	5 NM radius. ¹ /2 hour before SF hour after SS.
Joslin Fld-Magic Valley Rgnl		14,500	2 NM radius May-Oct weekends
(c) Star Skydiving Center	17 NM; 289° Boise	16,000	5NM radius. SR-2 hrs after SS daily.
	MONTANA		
Bozeman Gallatin Fld Arpt	1 NM; 038° Bozeman	15,000	2 NM radius. SR-SS daily.
(c) Butler Creek	19 NM; 296° Missoula	2,000 AGL	0.5 NM radius. Occasional use.
Dornblaser Fld	5.2 NM; 120° Missoula	12,500 AGL	0.5 NM radius. Occasional use.
(c) Grant Creek	1.5 NM; 053° Missoula	12,500 AGL	0.5 NM radius. Occasional use.
(c) Helena, Ft Harrison	6 NM; 265° Helena	12,000	1 NM radius. Wed-Sun SR-SS.
Kalispell	6 NM; 227° Kalispell	14,000	1 NM radius. 0900-SS daily.
(c) Kalispell, Carson Fld Arpt	28 NM; 238° Kalispell	14,000	2 NM radius. 0800-SS daily.
Kalispell, City Arpt	6 NM; 230° Kalispell	14,000 AGL	2 NM radius. 0800-SS daily.
(c) Laurel Muni Arpt	9 NM; 208° Billings	14,500	2 NM radius. Daily SR-SS.
Livingston, MIssion Fld	1 NM; 010° Livingston	14,500	2 NM radius. Daily SR-SS.
(c) Missoula Intl Arpt	1.4 NM; 315° Missoula	1,500 AGL	0.5 NM radius. May-Sep daily SR-SS, Oct-Apr occasional use.
Nine Mile R.S	17 NM; 289° Missoula	2,000 AGL	0.5 NM radius. Occasional use.
(c) Raser Ranch	2 NM; 357° Missoula	3,000 AGL	0.5 NM radius Apr-Oct occasion use.
Roundup Arpt	40 NM; 351° Billings	14,500	Weekends SR-SS.
(c) Six Mile	15 NM; 300° Missoula	2,000 AGL	0.5 NM radius. Occasional use.
(c) Stevensville Arpt	25 NM; 162° Missoula	14,000	1 NM radius. Wed and weekend SR-SS.
Stoney Creek		2,000 AGL	0.5 NM radius. Occasional use.
Three Forks Arpt		14,500	2 NM radius. Daily SR-SS.
University Campus		12,500 AGL	0.5 NM radius. Occasional use.
West Yellowstone, Yellowstone Arpt	60 NM; 034° DuBois	1,500 AGL	June-Sep.
	OREGON		
(c) Albany, Northwest Parachute Club	18 NM; 032° Corvallis	13,000	2 NM radius. SR-1 hr after SS Wed-Sun. Occasional hours Mon-Tue.
(c) Creswell, Hobby Fld	15 NM; 120° Eugene	15,000	5 NM radius. SR-SS daily.
(c) Estacada, Beaver Oaks Arpt	25 NM; 076° Newberg	13,000 AGL	1.5 NM radius. 0800-2300 Dai
(c) Hermiston Muni Arpt	16 NM; 280° Pendleton	15,000	2 NM radius. SR-SS weekends. Occasional hours weekdays.
(c) Medford, Beagle Sky Ranch Arpt	5 NM; 350° Rogue Valley	14,000	Daily SR-2200.
(c) Mollala, Sky Dive Oregon Arpt	19 NM; 110° Newberg	14,500	5 NM radius. 0800–2200, Daily Portland Intl Tower 118.1
(c) Redmond, Cline Falls Air Park Arpt \ldots	3 NM; 010° Deschutes	13,000	3 NM radius. 0800-2100.

PARACHUTE JUMPING AREAS

LOCATION	NEAREST VOR/VORTAC	ALTITUDE	REMARKS
	WASHINGTON		
) Coupeville NOLF	5 NM; 110° Penn Cove	12,500 AGL	2 NM radius. Occasional use.
Fort Lewis, Abrams Drop Zone	7.5 NM; 200° McChord	10,000	1 NM radius. Occasional use.
Fort Lewis, Anzio Drop Zone	9 NM; 160° McChord	10,000	0.3 NM radius. Occasional use.
Fort Lewis, Dakto Drop Zone	7.5 NM; 175° McChord	10,000	0.3 NM radius. Occasional use.
Fort Lewis, Darby Drop Zone	8.5 NM; 097° Olympia	10,000	0.5 NM radius. Occasional use.
Fort Lewis, El Guettar Drop Zone	7.5 NM; 092° Olympia	10,000	0.3 NM radius. Occasional use.
Fort Lewis, Gray AAF (Joint Base			
Lewis-McChord) Drop Zone	6 NM; 210° McChord	10,000	1 NM radius. Occasional use.
Fort Lewis, Marion Drop Zone	11 NM; 190° McChord	10,000	1 NM radius. Occasional use.
Fort Lewis, Merrill Drop Zone	9 NM; 092° Olympia	10,000	0.5 NM radius. Occasional use.
Fort Lewis, Mytkina Drop Zone	10 NM; 065° Olympia	10,000	1 NM radius. Occsional use.
Fort Lewis, Point Salinas Drop Zone	7.5 NM; 201° McChord	10,000	1 NM radius. Occasional use.
Fort Lewis, Pointe De Hoc Drop Zone	11.5 NM; 192° McChord	10,000	0.25 NM radius. Occasional use.
Fort lewis, Rogers Drop Zone	7 NM; 155° McChord	10,000	0.5 NM radius. Occasional use.
Fort Lewis, Solo Drop Zone	6.5 NM; 245° McChord	10,000	1 NM radius. Occasional use.
Kennewick, Vista Field	5.1 NM; 217° Pasco	14,500	1 NM radius. SR-SS weekends, 1700-SS weekdays, Apr-Nov.
(c) Larson Drop Zone	17 NM; 217° Moses Lake	3,000	Continuous. Personnel and hvy equip. Grant Co Intl Tower 126.4
Monroe, Firstair Fld	14 NM; 091° Paine	12,500	0.5 mi radius. Daily SR-SS.
(c) Richland Arpt	8 NM; 270° Pasco	13,000	2 NM radius. Continuous.
(c) Ritzville, West Plains Skydiving			
Drop Zone	36.4 NM; 207° Spokane	15,000	2 NM radius. SR-SS weekends, 1700-SS weekdays. Heavy use Apr-Nov.
(c) Shelton, Sanderson Fld Arpt	19 NM; 309° Olympia	14,000	2 NM radius. Daily 0800-2300.
(c) Snohomish, Harvey Fld	7 NM; 078° Paine	15,000	2 NM radius. Continuous.
(c) Snohomish, Harvey Fld	8 NM; 075° Paine	15,000	1 NM radius. Continuous.
(c) Spokane, Hayford Drop Zone	12 NM; 340° Spokane	10,000	0.5 NM radius. Occasional use.
(c) Tacoma, McChord Field (Joint Base			
Lewis-McChord)	28 NM, 181° Seattle	15,000	Weekends and occasional

(c) Tekoa, Willard Fld

(c) Toledo, Ed Carlson Mem Fld-South

nights.

12,500 5 NM radius. Continuous.

AERONAUTICAL CHART BULLETIN

The purpose of this bulletin is to provide major changes in aeronautical information that have occurred since the last publication date of each Sectional Aeronautical, VFR Terminal Area, and Helicopter Route Charts listed. The general policy is to include only those changes to controlled airspace and special use airspace that present a hazardous condition or impose a restriction on the pilot, and major changes to airports and radio navigational facilities, thereby providing the VFR pilot with the essential data necessary to update and maintain chart currency. The data is grouped by type and then by effective date. When a new edition of the Aeronautical Chart is published, the corrective tabulation will be removed from this bulletin. Inasmuch as this Bulletin provides major changes only, pilots should consult the airport listing in this directory for all new information. Users of U.S. World Aeronautical Charts (WAC) and U.S. Gulf Coast VFR Aeronautical Charts should consult the appropriate Sectional and VFR Terminal Area Charts for revisions.

Military Training Routes (MTRs) are shown on Sectional Aeronautical Charts, VFR Terminal Area, and Helicopter Route Charts. Only the route centerline, direction of flight and the route designator are shown — route widths and altitudes are not shown. Since these routes are subject to change every 56 days and the charts are reissued generally every 6 months, routes with a change in the alignment of the charted route centerline will be listed in this Aeronautical Chart Bulletin below. You are advised to contact the nearest FSS for route dimensions and current status for those routes affecting your flight.

BILLINGS SECTIONAL 80th Edition, 26 Aug 2010

OBSTRUCTIONS
23 Sep 2010 Ad

23 Sep 2010 Add obst 2638'MSL (389'AGL), 47°57'08"N, 101°16'31"W. Add obst 2629'MSL (389'AGL), 47°56'37"N, 101°17'17"W. Add obst 2336'MSL (315'AGL), 47°29'22"N, 101°28'56"W.

AIRPORTS

23 Sep 2010 No Major Changes.

NAVAID

23 Sep 2010 No Major Changes.

AIRSPACE

23 Sep 2010 No Major Changes.

SPECIAL USE AIRSPACE

23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

23 Sep 2010 No Major Changes.

MISCELLANEOUS

23 Sep 2010 No Major Changes.

CHEYENNE SECTIONAL 82nd Edition, 29 Jul 2010

OBSTRUCTIONS

29 Jul 2010 No Major Changes.

23 Sep 2010 Add obst 2890'MSL (349'AGL), 44°04'38"N, 102°26'47"W.

AIRPORTS

29 Jul 2010 No Major Changes.

23 Sep 2010 Delete ARTHUR arpt, 41°33′42″N, 101°42′41″W.

Delete GRANBY SPORTS ultralight flight park, 40°02′55″N, 105°56′18″W.

NAVAIDs

29 Jul 2010 - 23 Sep 2010 No Major Changes.

AIRSPACE

29 Jul 2010 - 23 Sep 2010 No Major Changes.

SPECIAL USE AIRSPACE

29 Jul 2010 - 23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

29 Jul 2010 - 23 Sep 2010 No Major Changes.

MISCELLANEOUS

29 Jul 2010 - 23 Sep 2010 No Major Changes.

GREAT FALLS SECTIONAL

79th Edition. 1 Jul 2010 29 Jul 2010 - 23 Sep 2010 No Major Changes.

AIRPORTS 29 Jul 2010 No Major Changes.

OBSTRUCTIONS

of Gallatin Field Airport.

SPECIAL USE AIRSPACE

MISCELLANEOUS

MILITARY TRAINING ROUTES 29 Jul 2010 No Major Changes. 23 Sep 2010 IR 479 Revised.

Airport.

23 Sep 2010 Delete SPENCER arpt. 45°50′19"N.116°39′33"W. Delete BEACON STAR arpt. 46°58′20″N.109°36′49″W. 29 Jul 2010 - 23 Sep 2010 No Major Changes.

a 5-mile radius of Boundary County Airport, Bonners Ferry, ID.

29 Jul 2010 - 23 Sep 2010 No Major Changes.

29 Jul 2010 - 23 Sep 2010 No Major Changes.

29 Jul 2010 Revise WEST YELLOWSTONE, MT Class E: That airspace extending upward from 700 feet

above the surface within 4.3 miles west and 8.3 miles east of the 026° and 206° bearings of the Yellowstone Airport extending from 8.3 miles northeast to 23.3 miles southwest of the Yellowstone

Airport; that airspace extending upward from 1,200 feet above the surface within 4.3 miles each side of the 209° bearing from 44°34′32″N, 111°11′51″W extending to 36.2 miles southwest, and within 5 miles north and 4.3 miles south of the 304° bearing from 44°34′32″N, 111°11′51″W extending to the east

44°34′32″N, 111°11′51″W extending to the east edge of V-343; that airspace extending upward from 12,000 feet MSL within a 30.5-mile radius of $44^{\circ}34'32''N$, $111^{\circ}11'51''W$ extending clockwise from the 026° bearing from $44^{\circ}34'32''N$, $111^{\circ}11'51''W$ to the 081° bearing from $44^{\circ}34'32''N$, $111^{\circ}11'51''W$; that airspace extending upward from 12,500 feet MSL within 4.3 miles each side of the 293°, 329° and 043° bearing from 45°00′19″N, 110°53′49″W extending to 25.16 miles west to 30.57 miles northwest to 54.24 miles north, and within 4.3 miles each side of the 312° bearing from 44°31′10″N, 111°14′03″W extending to 25.20 miles northwest, excluding that portion that overlies the east edge of V-343 and south edge of V-2 and V-86; that airspace extending upward from 13,000 feet MSL, within a 30,5-mile radius of 44°34′32″N, 111°11′51″W extending clockwise from the 313° bearing to the 026° bearing from 44°34'32"N, 111°11'51"W excluding that portion that overlies V-298 and V-343. This Class E airspace area shall be effective during the specific dates and times established in advance by a Notice to Airmen. The effective date and time will thereafter be continuously published in the Airport/Facility Directory. Add BONNERS FERRY, ID Class E: That airspace extending upward from 700 feet above the surface within

23 Sep 2010 Revise BOZEMAN, MT Class E: That airspace extending upward from the surface within 3 miles each side of the 316° bearing of Gallatin Field Airport, extending from the 4.4-mile radius of the airport to 14 miles northwest of Gallatin Field Airport; and that airspace 2.4 miles each side of the 212° bearing of the Gallatin Field Airport, extending from the 4.4-mile radius of the airport to 7 miles northwest

Revise BOZEMAN, MT Class E: That airspace extending upward from 700 feet above the surface within a 13.5-mile radius of Gallatin Field Airport, and within 4.8 miles northeast and 13 miles southwest of the 316° bearing of the airport extending from the 13.5-mile radius to 24.4 miles northwest of Gallatin Field

edge of V-343; that airspace extending upward from 10,700 feet MSL within a 25.3-mile radius of 44°34′32″N, 111°11′51″W extending clockwise from the 081° bearing from 44°34′32″N, 111°11′51″W to 4.3 miles east of the 236° bearing from 44°34'32"N, 111°11'51"W, and within 4.3 miles each side of the 236° bearing from 44°34′32″N, 111°11′51″W extending to 43.5 miles southwest; that airspace extending upward from 10,700 feet MSL within 9 miles south and 5 miles north of the 304° bearing from

83rd Edition, 23 Sep 2010 OBSTRUCTIONS 23 Sep 2010 No Major Changes.

KLAMATH FALLS SECTIONAL

23 Sep 2010 No Major Changes. 23 Sep 2010 No Major Changes.

23 Sep 2010 No Major Changes.

268

AIRPORTS

AIRSPACE

NAVAIDs

AIRSPACE

MISCELLANEOUS

SPECIAL USE AIRSPACE 23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

23 Sep 2010 No Major Changes.

23 Sep 2010 No Major Changes.

SALT LAKE CITY HELICOPTER ROUTE CHART

3rd Edition, 26 Oct 2006

OBSTRUCTIONS 23 Nov 2006 - 23 Sep 2010 No Major Changes. **AIRPORTS**

23 Sep 2010 No Major Changes.

SPECIAL USE AIRSPACE

MILITARY TRAINING ROUTES

23 Nov 2006 - 10 Apr 2008 No Major Changes. **5 Jun 2008** Delete PAYNE arpt, 41°05′54″N, 112°06′56″W. Delete WARD heli, 40°35′59"N, 111°48′03"W.

31 Jul 2008 - 25 Sep 2008 No Major Changes. 20 Nov 2008 Delete CHANNEL 4 heli, 40°43′57″N, 111°57′20″W.

15 Jan 2009 - 3 Jun 2010 No Major Changes. 29 Jul 2010 CAMP WILLIAMS ANG arpt abandoned, 40°25′55″N, 111°55′51″W.

23 Nov 2006 - 23 Sep 2010 No Major Changes.

23 Nov 2006 - 23 Sep 2010 No Major Changes.

23 Nov 2006 - 23 Sep 2010 No Major Changes.

23 Nov 2006 - 23 Sep 2010 No Major Changes.

MISCELLANEOUS 23 Nov 2006 - 23 Sep 2010 No Major Changes.

83rd Edition, 8 Apr 2010

SALT LAKE CITY SECTIONAL

Delete LOGAN VOR-DME, 41°50′39″N, 111°51′55″W,

29 Jul 2010 - 23 Sep 2010 No Major Changes.

OBSTRUCTIONS

of designation.

SPECIAL USE AIRSPACE

MISCELLANEOUS

MILITARY TRAINING ROUTES

published in the Airport/Facility Directory.

8 Apr 2010 - 23 Sep 2010 No Major Changes.

8 Apr 2010 - 23 Sep 2010 No Major Changes.

8 Apr 2010 - 23 Sep 2010 No Major Changes.

AIRPORTS

AIRSPACE

8 Apr 2010 No Major Changes. 3 Jun 2010 Add BATTLE MOUNTAIN, NV Class E: Within a 4.2-mile radius of Battle Mountain Airport, and

within 1.4 miles each side of the 218° bearing extending from the 4.2- mile radius to 7.4 miles

southwest of the Battle Mountain Airport. This Class E airspace area is effective during the specific dates

and times established in advance by a Notice to Airmen. The effective date and time will thereafter be continuously published in the Airport/Facility Directory.

8 Apr 2010 No Major Changes. **3 Jun 2010** Delete ARCO NDB, 43°35′57″N, 113°20′32″W.

29 Jul 2010 Revise WEST YELLOWSTONE, MT Class E: That airspace extending upward from 700 feet above the surface within 4.3 miles west and 8.3 miles east of the 026° and 206° bearings of the Yellowstone Airport extending from 8.3 miles northeast to 23.3 miles southwest of the Yellowstone Airport; that airspace extending upward from 1,200 feet above the surface within 4.3 miles each side of the 209° bearing from 44°34′32″N, 111°11′51″W extending to 36.2 miles southwest, and within 5 miles north and 4.3 miles south of the 304° bearing from 44°34′32″N, 111°11′51″W extending to the east edge of V-343; that airspace extending upward from 10,700 feet MSL within a 25.3-mile radius of 44°34'32"N, 111°11'51"W extending clockwise from the 081° bearing from 44°34'32"N, 111°11'51"W to 4.3 miles east of the 236° bearing from 44°34'32"N, 111°11'51"W, and within 4.3 miles each side of the 236° bearing from 44°34′32″N. 111°11′51″W extending to 43.5 miles southwest: that airspace extending upward from 10,700 feet MSL within 9 miles south and 5 miles north of the 304° bearing from 44°34′32″N, 111°11′51″W extending to the east edge of V-343; that airspace extending upward from 12,000 feet MSL within a 30.5-mile radius of 44°34′32″N, 111°11′51″W extending clockwise from the 026° bearing from 44°34'32"N, 111°11'51"W to the 081° bearing from 44°34'32"N, 111°11'51"W; that airspace extending upward from 12,500 feet MSL within 4.3 miles each side of the 293°, 329° and 043° bearing from 45°00'19"N, 110°53'49"W extending to 25.16 miles west to 30.57 miles northwest to 54.24 miles north, and within 4.3 miles each side of the 312° bearing from 44°31′10″N, 111°14′03″W extending to 25.20 miles northwest, excluding that portion that overlies the east edge of V-343 and south edge of V-2 and V-86; that airspace extending upward from 13,000 feet MSL, within a 30.5-mile radius of 44°34′32″N, 111°11′51″W extending clockwise from the 313° bearing to the 026° bearing from 44°34'32"N, 111°11'51"W excluding that portion that overlies V-298 and V-343. This Class E airspace area shall be effective during the specific dates and times established in advance by a Notice to Airmen. The effective date and time will thereafter be continuously published in the Airport/Facility Directory. 23 Sep 2010 Revise LUCIN, UT Class E: That airspace extending upward from 1,200 feet above the surface bounded on the west by V-269; on the east by V-484; and on the south by V-32; excluding existing controlled airspace 8,500 feet MSL and above; excluding that airspace designated for federal airways; excluding the portions within Restricted Area R-6404 and Lucin MOA during their published hours

Establish KEMMERER, WY Class E: Within a 4.3-mile radius of the Kemmerer Municipal Airport, and within 1 mile each side of the 360° bearing from the airport, extending from the 4.3-mile radius to 7 miles north of the airport. This Class E airspace area is effective during the specific dates and times established in advance by a Notice to Airmen. The effective date and time will thereafter be continuously

NW. 23 SEP 2010 to 18 NOV 2010

8 Apr 2010 - 23 Sep 2010 No Major Changes.

269

8 Apr 2010 - 3 Jun 2010 No Major Changes. **29 Jul 2010** CAMP WILLIAMS ANG arpt abandoned, 40°25′55″N, 111°55′51″W. **23 Sep 2010** No Major Changes.

AERONAUTICAL CHART BULLETIN

SALT LAKE CITY TERMINAL AREA CHART 42nd Edition, 8 Apr 2010

OBSTRUCTIONS

AIRPORTS

NAVAIDs

8 Apr 2010 - 23 Sep 2010 No Major Changes.

8 Apr 2010 - 3 Jun 2010 No Major Changes.

29 Jul 2010 CAMP WILLIAMS ANG arpt abandoned, 40°25'55"N, 111°55'51"W. 23 Sep 2010 No Major Changes.

8 Apr 2010 - 23 Sep 2010 No Major Changes. AIRSPACE 8 Apr 2010 - 29 Jul 2010 No Major Changes.

23 Sep 2010 Revise LUCIN, UT Class E: That airspace extending upward from 1,200 feet above the

surface bounded on the west by V-269; on the east by V-484; and on the south by V-32; excluding

existing controlled airspace 8,500 feet MSL and above; excluding that airspace designated for federal airways; excluding the portions within Restricted Area R-6404 and Lucin MOA during their published hours

8 Apr 2010 - 23 Sep 2010 No Major Changes.

8 Apr 2010 - 23 Sep 2010 No Major Changes.

8 Apr 2010 - 23 Sep 2010 No Major Changes.

Change obst from 2816'MSL (255'AGL) to 2938'MSL (389'AGL), 46°57'13"N, 120°12'50"W.

SEATTLE SECTIONAL 79th Edition. 3 Jun 2010

OBSTRUCTIONS 3 Jun 2010 No Major Changes.

AIRSPACE

beginning.

of designation. SPECIAL USE AIRSPACE

MISCELLANEOUS

MILITARY TRAINING ROUTES

Add obst 760'MSL (389'AGL), 46°47'38"N, 124°04'07"W. 23 Sep 2010 Add obst 829'MSL (389'AGL), 46°47'29"N, 124°03'44"W. **AIRPORTS**

3 Jun 2010 No Major Changes. 29 Jul 2010 Delete KENT arpt, 46°52'24"N, 119°07'49"W.

29 Jul 2010 Add obst 2919'MSL (389'AGL)UC, 46°57'20"N, 120°12'56"W.

Delete COUGAR FLAT arpt, 46°17'33"N, 122°57'01"W. 23 Sep 2010 Delete SPENCER arpt, 45°50′20″N, 116°39′34″W. Delete BARRETT arpt, 45°49'16"N, 118°29'53"W

Add RP35 to TACOMA NARROWS arpt, 47°16'05"N, 122°34'41"W.

3 Jun 2010 No Major Changes.

29 Jul 2010 Change DEER PARK NDB freq from 216 to 365, 47°58'04"N, 117°25'35"W.

Add CANYON NDB, freq 388, ident (CRK) 47°40'37"N, 117°27'00"W.

23 Sep 2010 No Major Changes.

3 Jun 2010 No Major Changes.

48°17'48"N, 124°00'43"W Vancouver FIR boundary to 48°40'58"N, 124°00'43"W thence

CONTROL AREA EXTENSION: The airspace from 700 ' AGL within the area bounded by a line beginning at

124°00′43″W point of beginning.

29 Jul 2010 Add BONNERS FERRY, ID Class E: That airspace extending upward from 700 feet above the surface within a 5-mile radius of Boundary County Airport, Bonners Ferry, ID.

counter-clockwise along the arc of a circle of 45 miles radius centered on 49°11'42"N, 123°10'55"W to 48°30′45″N, 123°38′59″W to 48°22′19″N, 123°29′12″W thence counter-clockwise along the arc of a circle of 5 miles radius centered on 48°25'22"N. 123°23'15"W to 48°20'53"N. 123°26'34"W to 48°17′03″N, 123°14′54″W thence westerly along the Vancouver FIR boundary to 48°17′48″N,

Revise VANCOUVER FLIGHT INFORMATION REGION, SOUTH VANCOUVER ISLAND, BC CONTROL AREA EXTENSION: The airspace 1,600 ' AGL to 12,500 ' within the area bounded by a line beginning at 48°17′48″N, 124°00′43″W thence westerly along the Vancouver FIR boundary to 48°29′36″N, 124°43′38″W to 48°47′13″N, 125°12′39″W thence counter-clockwise along the arc of a circle of 25 miles radius centered on 49°02'49"N, 125°42'15"W to 49°10'45"N, 125°06'11"W thence

counter-clockwise along the arc of a circle of 35 miles radius centered on 49°45′14″N, 124°57′29″W to

23 Sep 2010 Revise VANCOUVER FLIGHT INFORMATION REGION, SOUTH VANCOUVER ISLAND, BC

 $49^{\circ}15'10''N,\,124^{\circ}30'06''W$ thence northeasterly along the Comox, BC MTCA boundary to $49^{\circ}19'04''N,\,124^{\circ}18'39''W$ thence counter-clockwise along the arc of a circle of 45 miles radius centered on 49°11′42″N, 123°10′55″W to 48°40′58″N, 124°00′43″W to 48°17′48″N, 124°00′43″W point of

CONTINUED ON NEXT PAGE

Revise KELSO, WA Class E: That airspace extending upward from 700 feet above the surface within a 6.4-mile radius of the Southwest Washington Regional Airport, and 2.4 miles each side of the 290° bearing of the airport extending 9.1 miles west, and 4.3 miles each side of the 337° bearing of the

airport extending 22.2 miles northwest, and 5.8 miles west and 3 miles east of the 012° bearing of the airport extending 18.2 miles north of the airport. SPECIAL USE AIRSPACE 3 Jun 2010 - 23 Sep 2010 No Major Changes.

3 Jun 2010 - 23 Sep 2010 No Major Changes.

MISCELLANEOUS 3 Jun 2010 - 23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

SEATTLE TERMINAL AREA CHART 74th Edition. 3 Jun 2010

OBSTRUCTIONS 3 Jun 2010 -23 Sep 2010 No Major Changes.

3 Jun 2010 - 29 Jul 2010 No Major Changes. 23 Sep 2010 Add RP35 to TACOMA NARROWS arpt, 47°16'05"N, 122°34'41"W.

3 Jun 2010 - 23 Sep 2010 No Major Changes.

AIRSPACE

3 Jun 2010 - 23 Sep 2010 No Major Changes.

SPECIAL USE AIRSPACE 3 Jun 2010 - 23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES 3 Jun 2010 - 23 Sep 2010 No Major Changes.

MISCELLANEOUS 3 Jun 2010 - 23 Sep 2010 No Major Changes.

SUPPLEMENTAL COMMUNICATION REFERENCE

Contained within this tabulation, and listed alphabetically by airport name, are all private—use airports charted on the U.S. IFR Enroute Low and High Altitude charts in the United States, having terminal approach and departure control facilities. Additionally, listed by country, are all Canadian and Mexican airports that appear on the U.S. IFR Enroute charts with approach and departure control services. All frequencies transmit and receive unless otherwise noted. Radials defining sectors are outbound from the facility.

UNITED STATES

UNITED STATES	
ACILITY NAME	CHART & PANEI
Frankfort, IL (LL4Ø)	L-28H
Chicago App/Dep Con 133.1 285.6	
Glasgow Industrial, MT (Ø7MT)	H-1E, 2F, L-13D
Salt Lake Center App/Dep Con 126.85 305.2	1 400
USAF Academy Bullseye Aux Airstrip, CO (CO9Ø)	L-10F
ASOS 118.325 West Kentucky Airpark, KY (5KY3)	L-16
Memphis Center App/Dep Con 133.65 292.15	L-10
William P Gwinn, FL (Ø6FA)	H-8I, L-230
Gwinn Tower 120.4 279.25 (Mon–Fri 1300–2100Z‡)	11 01, 2 200
Gnd Con 121.65 279.25	
CILITY NAME	CHART & PANEL
Abbotsford, BC (CYXX)	H-1B, L-12F
ATIS 119.8 (1500–0700Z‡)	H-1B, L-12F
Victoria Trml App/Dep Con 132.7 (Avbl on ground) 290.8	
Tower 119.4 (Inner) 121.0 (Outer) 295.0 (1500–0700Z‡) Gnd Con 121.8	
MF 119.4 295.0 (0700–1500Z‡) (Shape irregular to 4500')	
Amos/Magny, QC (CYEY)	H-11B
Montreal Center App/Dep Con 125.9	111
Atikokan Muni, ON (CYIB)	L-14
MF 122.3 (5 NM to 4500' No ground station)	
Barrie-Orillia (Lake Simcoe Rgnl), ON (CYLS)	H-11B, L-31C
AWOS 122.55 (Pvt)	
Toronto Center App/Dep Con 124.025	
Bar River, ON (CPF2)	L-310
Toronto Center App/Dep Con 132.65	
Bathurst, NB (CZBF)	L-32J
Moncton Center App/Dep Con 134.25	
Boundary Bay, BC (CZBB)	H-1B, L-1E
ATIS 125.5 (1500–0700Z‡)	
Vancouver App/Dep Con 132.3 363.8	
Tower 118.1 (Inner) 127.6 (Outer) (1500–0700Z‡) Gnd Con 124.3	
MF 118.1 (0700–1500Z‡ to 2000'. Vancouver Trml 125.2 above 2000'. Shape irregular to 2500'.)	
Brampton, ON (CNC3)	L-310
Toronto Trml App/Dep Con 119.3 253.1	L-310
Brandon Muni, MB (CYBR)	H-2H
Winnipeg Center App/Dep Con 132.25 285.4	
MF 122.1 (5 NM to 4000')	
Brantford, ON (CYFD)	L-310
Toronto Trml App/Dep Con 128.27	
Brockville-Thousand Islands Rgnl Tackaberry, ON (CNL3)	L-320
Montreal Center App/Dep Con 134.675	
Bromont, QC (CZBM)	L-320
Montreal Center App/Dep Con 132.35 MF 122.15 (5 NM to 3400')	
Burlington Airpark, ON (CZBA)	L-310
Toronto Center App/Dep Con 119.3 253.1	
Castlegar/West Kootenay Rgnl, BC (CYCG)	H-10
Vancouver Center App/Dep Con 134.2 227.3	
MF 122.1 (5 NM to 6500')	
Centralia/James T. Fld Muni, ON (CYCE)	H-10G, 11B, L-31D
Toronto Center App/Dep Con 135.30	
Charlottetown, PE (CYYG)	H-11E, L-32J
Moncton Center App/Dep Con 135.65 384.8 MF 118.0 (5 NM to 3200')	11 400 1 222
Chatham-Kent, ON (CNZ3)	H-10G, L-30G
Cleveland Center App/Dep Con 132.25	

SUPPLEMENTAL COMMUNICATION REFERENCE	273
FACILITY NAME	CHART & PANEL
Collingwood, ON (CNY3)	H-11B, L-31D
Toronto Center App/Dep Con 124.02	
Cornwall Rgnl, ON (CYCC)	L-32G
Boston Center App/Dep Con 135.25 377.1	
Cranbrook/Canadian Rockies Intl, BC (CYXC) Vancouver Center App/Dep Con 133.6 MF 122.3 (5 NM to 6100')	H-1C
Debert, NS (CCQ3)	H-11E, L-32J
Halifax Trml App/Dep Con 119.2	11 112, 2 025
Digby, NS (CYID)	L-32J
Moncton Center App/Dep Con 123.9	
Downsview, ON (CYZD)	H-11B, L-31E
Toronto Center App/Dep Con 133.4	
MF 126.2 (1300–2300Z‡, 3 NM to 1700′) Drummondville, QC (CSC3)	L-32H
Montreal Center App/Dep Con 132.35	L=3211
Earlton (Timiskaming Rgnl), ON (CYXR)	H-11B
MF 122.0 (5 NM to 3800')	
AWOS 128.6	
Elliot Lake Muni, ON (CYEL)	L-31C
Toronto Center App/Dep Con 135.4	
Fort Frances Muni, ON (CYAG)	L-14H
Minneapolis Center App/Dep Con 120.9	U 445 L 001
Fredericton Intl, NB (CYFC) ATIS 127.55 (1045–0245Z‡, OT AWOS)	H-11E, L-32I
Moncton Center App/Dep Con 124.3 135.5 270.8	
Tower 119.0 (1045–0245Z‡) Gnd Con 121.7 (1045–0245Z‡)	
MF 119.0 (0245–1045Z‡, 5 NM to 3500′)	
Goderich, ON (CYGD)	H-11B, L-31D
Toronto Center App/Dep 135.3 266.3	
Greenwood, NS (CYZX)	H-11E, L-32J
ATIS 128.85 244.3 (1100-0000Z‡)	
App/Dep Con 120.6 335.9 Tower 119.5 126.2 236.6 324.3	
Gnd Con 133.75 289.4 Clnc Del 128.025 283.9 Grimsby Air Park, ON (CNZ8)	L-31E
Toronto Trml App/Dep Con 128.27 268.75 Tower 125.0 308.475	L-31L
Halifax/Shearwater, NS (CYAW)	H-11E, L-32J
ATIS 129.175 (Ltd hrs)	,
App/Dep Con 119.2 MF Shearwater Advisory 119.0 126.2 340.2 360.2 (Ltd hrs)	
Gnd Con 121.7 250.1	
Halifax/Stanfield Intl, NS (CYHZ)	H-11E, L-32J
ATIS 121.0	
Moncton Center App/Dep Con 118.7 119.2 128.55 135.3 363.8	
Tower 118.4 236.6 Gnd Con 121.9 275.8 Clnc Del 123.95 Apron Advisory 122.125	
Hamilton, ON (CYHM)	H-10H, 11B, L-11B
ATIS 128.1	,,
Toronto Trml App/Dep Con 128.27 268.75 Tower 119.7 125.0	
Gnd Con 121.6	
Kingston, ON (CYGK)	H-11C, L-31E, 32F
Montreal Center App/Dep Con 135.05 398.4 (0400-1115Z‡)	
MF 122.5 (1115–0400Z‡ 5 NM to 3300′)	
Kitchener/Waterloo, ON (CYKF)	H-11B, L-31D
ATIS 125.1 (1200–04007‡) Toronto Trml App/Dep Con 128.275	
Waterloo Tower 126.0 118.55 (1200–0400Z‡) Gnd Con 121.8	
MF 126.0 (0400–1200Z‡ 5 NM to 4000′)	
Lachute, QC (CSE4)	L-32G
Montreal Center App Con 124.65 132.85 268.3	
Montreal Center Dep Con 132.85 268.3	
La Tuque, QC (CYLQ)	H-11C
Montreal Center App/Dep Con 134.5	
Langley, BC (CYNJ)	L-1E
ATIS 124.5 (1630–0230Z, DT 1530–0330Z)	
Victoria Trml App/Dep Con 132.7 290.8 Tower 119.0 (1630–0230Z, DT 1530–0330Z)	
Ord Con 121 0 ME 110 0 (0220 16207 DT 0220 15207 2 NM to 1000')	

Gnd Con 121.9 MF 119.0 (0230–1630Z, DT 0330–1530Z 3 NM to 1900')

CILITY NAME	CHART & PA
Leamington, ON (CLM2)	L=3
Cleveland Center App/Dep Con 132.45 Lethbridge, AB (CYQL)	H-
ATIS 124.4 (1300–0545Z‡)	**
Edmonton Center App/Dep Con 132.75 265.2 MF 121.0 (5 NM to 6000')	
Lindsay, ON (CNF4)	L-31E, L-3
Toronto Center App/Dep 134.25	
Liverpool/South Shore Rgnl, NS (CYAU)	L=3
Moncton Center App/Dep Con 123.9	U 10C 1
London, ON (CYXU) ATIS 127.8 (1120-0345Z‡)	H–10G, 1 L–30G, 3
ATIS 127.8 (1120–03452‡) Toronto Center App/Dep 135.3 135.625	L-00a, c
Tower 119.4 125.65 (1120–0345Z‡) Gnd Con 121.9	
MF 119.4 (0345–1120Z‡ 5 NM to 3000')	
Manitowaning/Manitoulin East Muni, ON (CYEM)	L=3
Toronto Center App/Dep 135.4 260.9	
Maniwaki, QC (CYMW)	L=3
Montreal Center App/Dep Con 126.57	
Mascouche, QC (CSK3)	L=3
MF 122.35 (5 NM to 2500'. No gnd station. Excluding the portion S of the	
N shore of Riviere des Milles-lles and 1 NM around Lac Agile Mascouche arpt.)	
Medicine Hat, AB (CYXH) AWOS 124.875 (0345–1245Z‡)	H-
AWOS 124.875 (0345-12452‡) MF 122.2 (1245-0345Z‡ 5 NM to 5400′)	
Midland/Huronia, ON (CYEE)	L=3
Toronto Center App/Dep 124.025	
Miramichi, NB (CYCH)	H-11E, L-
Moncton Center App/Dep Con 123.7	
Moncton/Greater Moncton Intl, NB (CYQM)	H-11E, L-
ATIS 128.65	
App/Dep 124.4 Tower 120.8 236.6 Gnd Con 121.8 275.8	
Apron Advisory 122.075	
Mont-Laurier, QC (CSD4) Montreal Center App/Dep Con 126.57	L=3
Montreal Center App/Dep Con 126.57 Montreal Intl (Mirabel), QC (CYMX)	H-11C, 12K, L-
ATIS 125.7	11 110,
Montreal Center App Con 124.65 132.85 268.3	
Montreal Dep Con 132.85 268.3	
MF 119.1 (7 NM shape irregular to 2000') VFR Advisory 134.15	_
Montreal/Pierre Elliott Trudeau Intl, QC (CYUL)	H-11C, 12K, L-
ATIS 133.7 Martical Trial Ann Can 118 0 124 65 126 0 122 95 269 2	
Montreal Trml App Con 118.9 124.65 126.9 132.85 268.3	
Tower 119.9 267.1 Gnd Con 121.9 275.8 Clnc Del 125.6 Apron 122.075 Montreal Trml Dep Con 118.9 (SE-S-SW) 124.65 (W-NW-NE) 268.3	
Wontreal Irmi Dep Con 118.9 (SE-S-SW) 124.05 (W-NW-NE) 268.3 VFR Advisory 134.15	
Montreal/St-Hubert, QC (CYHU)	H-11C, L-
ATIS 124.9 (Apr-Oct 1045–0500Z‡, Nov–Mar 1045–0400Z) AWOS 124.9	**
Montreal Center App/Dep Con 125.15 268.3	
St. Hubert Tower 118.4 (Apr-Oct 1045-0500Z‡, Nov-Mar 1045-0400Z)	
Gnd Con 126.4 MF 118.4 (Apr-Oct 0500-1045Z‡, Nov-Mar	
0400–1045Z 5 NM shape irregular to 2500') VFR Advisory 134.15	
Muskoka, ON (CYQA)	H-11B, L-
AWOS 124.575 Timmins Radio App/Dep Con 122.3	
MF 122.3 (5 NM to 3900')	U 1D I
Nanaimo, BC (CYCD) Victoria Trml App/Dep 120 8 133 95 252 3 ME 122 1 291 8 1330_05307† (5 NM to	H–1B, L
Victoria Trml App/Dep 120.8 133.95 252.3 MF 122.1 291.8 1330-0530Z‡ (5 NM to 2500')	
North Bay, ON (CYYB)	H-11B, L
ATIS 124.9 (1130–0330Z‡)	,
Toronto Center App/Dep 121.225 127.25	
MF 118.3 (1130–0330Z‡ 7 NM to 5000')	
Oshawa, ON (CYOO)	L-
ATIS 125.675 (1130-0330Z‡)	
Toronto Trml App/Dep Con 133.4	
Tower 120.1 (1130-0330Z‡) Gnd Con 118.4	
MF 120.1 (0330-1130Z‡ 5 NM to 3000')	

275

L-31D

L-30F

H-1R

H-1D

L-1E

H-11D, L-32H

H-11D

H-11B

H-11E, L-32J

H-2K, L-31B

H-11D, L-32H

L-31E, 32F

H-2H

H-10G, 11B, L-30F

H-11B, L-31E, 32F

ATIS 121.15 Ottawa App Con 135.15 Tower 118.8 (VFR South) 120.1 (VFR North) 118.8 341.3 Gnd Con 121.9 Clnc Del 119.4 Ottawa Dep Con 128.175 Toronto Center App/Dep 132.575 290.6

Owen Sound/Billy Bishop Rgnl, ON (CYOS) Pelee Island, ON (CYPT) Cleveland Center App/Dep Con 126.35 360.0 Pembroke, ON (CYTA)

Montreal Center App/Dep Con 135.2 Petawawa Advisory 126.4 250.1 (Mon-Fri 1300-2130Z‡, OT PPR)

Penticton, BC (CYYF)

FACILITY NAME

ATIS 121.15

Vancouver Center App/Dep Con 133.5 351.3 MF 118.5 (5 NM to 4100') Peterborough, ON (CYPQ)

AWOS 126.925

Toronto Center App/Dep 134.25 Pincher Creek, AB (CZPC)

Edmonton Center App/Dep Con 132.75 265.2 Pitt Meadows, BC (CYPK) ATIS 125.0 (1500-0700Z‡)

Vancouver Center App Con 128.6 352.7 (Outer) MF 126.3 (0700-1500Z‡) (3NM to 2500')

Pitt Tower 126.3 (1500-0700Z‡) Gnd Con 123.8 Quebec/Jean Lesage Intl, QC (CYQB) ATIS 134 6

Vancouver Center Dep Con 132.3 363.8 (South) AWOS 122.025 (Pvt)

Tower 118.65 236.6 Gnd Con 121.9 250.0

Montreal Center App/Dep Con 124.0 127.85 135.025 270.9 322.8 Riviere Du Loup, QC (CYRI) AWOS 122.025 (Pvt) Montreal Center App/Dep Con 125.1 299.6

Rouyn Noranda, QC (CYUY) Montreal Center App/Dep Con 125.9

MF 122.2 (5 NM to 4000') Saint John, NB (CYSJ)

Moncton Center App/Dep Con 124.3 135.5 270.8 MF 118.5 (5 NM to 3400') Sarnia (Chris Hadfield), ON (CYZR)

AWOS 119.125 Toronto Center App/Dep Con 134.375

Sault Ste Marie, ON (CYAM) ATIS 133.05 (1300-0100Z±)

Toronto Center App/Dep Con 132.65 344.5

Sherbrooke, QC (CYAM)

Tower 118.8 (1300-0100Z‡) Gnd Con 121.7 (1300-0100Z‡) MF 118.8 (0100-1300Z‡ 5 NM irregular shape to 3000')

ATIS 120.85 (Mon-Fri 1400-2300Z‡ except holidays) Tower 126.2 384.2 (Mon-Fri 1400-2300Z‡ except holidays)

Montreal Center App/Dep Con 132.55 MF 123.5 (Ltd hrs 5 NM to 3800')

NW. 23 SEP 2010 to 18 NOV 2010

Montreal Center App/Dep 124.275

AWOS 126.25

Southport, MB (CYPG)

South Renfrew Muni, ON (CNP3)

Gnd Con 121.7 275.8

CILITY NAME Springwater Barrie Air	park, ON (CNA3)	CHART & PA L-3
Toronto Center A	App/Dep Con 124.025	
St. Catherines/Niagara		H-10H, 11B, L-3
ATIS 128.525 (1	• • • • • • • • • • • • • • • • • • • •	
	p/Dep Con 133.4 253.1 L5–0200Z‡ 5 NM to 3300′)	
St. Frederic, QC (CSZ		L-3
Montreal Center	App/Dep Con 135.025 270.9	
St. Georges, QC (CYS		H-32H, L-1
Montreal Center MF 122.15 (5 N	App/Dep Con 132.35 M 3900' ASL)	
MF 122.15 (5 N St. Jean, QC (CYJN)	M 3900' ASL)	L-3
	App/Dep Con 125.15 268.3	
Tower 118.2 (Ap	or-Oct 1230-0230Z‡ Nov-Mar 1300-0200Z‡)	
Gnd Con 121.7		
Sudbury, ON (CYSB) ATIS 127 4		H-31B, 10G, L-3
ATIS 127.4 Toronto Center A	App/Dep Con 135.5	
MF 125.5 (7 NM		
Summerside, PE (CYS	SU)	H-11E, L-3
AWOS 122.55 (F	Pvt)	
	App/Dep Con 124.4 384.8	4 21 1-4
Thunder Bay, ON (CYC ATIS 128.8 (110	• /	H-2J, L-1
	r App/Dep Con 132.125	
	100-0400Z‡) Gnd Con 121.9 (1100-0400Z‡)	
App/Dep 119.2	MF 118.1 (0400-1100Z‡ 5 NM to 4000')	
Timmins/Victor M. Pow		H-1
ATIS 124.95 (10	000-0500Z‡) App/Dep Con 128.3 MF 122.3 (5 NM to 4000')	
Toronto Center A Toronto/Buttonville Mu	****	L=3
ATIS 127.1 (120		
Toronto Trml App	p/Dep Con 133.4	
Tower 124.8 11	9.9 (1200-0400Z‡) Gnd Con 121.8 (1200-0400Z‡)	
	D-1200Z‡ No gnd station. 5 NM shape irregular to below 2500')	1_3
Toronto/Billy Bishop To ATIS 133.6 (113	oronto City Airport, ON (CYTZ) 30-0400Z±)	L=3
App/Dep Con 13		
Tower 118.2 11	9.2 (1130-0400Z‡) Gnd Con 121.7	
Toronto/Lester B Pears		H-11B, L-3
ATIS 120.825	17 17 17 18 10 107 17 17 100 0	
	75 125.4 132.8 Dep Con 127.575 128.8	
Tower 118.35 1 Clnc Del 121.3 (.18.7 Gnd Con 119.1 121.65 121.9 (1200-0400Z±)	
Trenton, ON (CYTR)	1200-04002+1	H-11C, L-31E,
ATIS 135.45 25		
	28.4 324.3 Tower 128.7 236.6 Gnd Con 121.9 275.8	
Cinc Del 124.35 Trenton/Mountain View		H-11C. L-31E.
Trenton/Mountain View		11-110, 2 0,
Trois-Rivieres, QC (C)	•	H-11C, L-3
Montreal Center	App/Dep Con 128.225 229.2	
MF 123.0 (5 NN		ш
Val-D'or, QC (CYVO) Montreal Center	1 (0) 0 2 405 0 000 0	H-1
	^ App/Dep Con 125.9 308.3 D-0325Z‡ 5 NM to 4000')	
Vancouver Intl, BC (C)		H–1B, L-
ATIS 124.6 124	.75	
App Con 128.6	128.17 352.7 (Outer) 133.1 134.225 352.7 (Inner)	
	25 (north) 132.3 (south) 363.8	
Tower 118.7 (Sc	outh) 119.55 (north) VFR 124.0 125.65 226.5 236.6	
	(south) 127.15 (north) 275.8 Clnc Del 121.4	

SUPPLEMENTAL COMMUNICATION REFERENCE	277
FACILITY NAME	CHART & PANEL
Victoria Intl, BC (CYYJ)	H-1B, L-1E
ATIS 118.8 (1400–0800Z‡)	
App Con 125.95 Dep Con 133.85	
Tower 119.1 (Outer) 119.7 (Inner) 239.6	
Gnd Con 121.9 361.4 (1400–0800Z‡ 0T ctc Kamloops 119.7)	
Cinc Del 126.4 (1400–0800Z‡)	
Victoriaville, QC (CSR3)	L-32H
Montreal Center App Con 132.35	
Waterville/Kings Co Muni, NS (CCW3)	L-32J
Greenwood Trml App/Dep Con 120.6 335.9	
Greenwood Tower 119.5 324.3	
Wiarton, ON (CYVV)	H-11B, L-31D
Toronto Center App/Dep Con 132.575	
MF 122.2 (5 NM to 3700')	
Windsor, ON (CYQG)	H-10G, L-8J
ATIS 134.5 (1130-0330Z‡)	
Detroit App/Dep Con 126.85 127.5 134.3 348.3 363.2	
Tower 124.7 (1130–0330Z‡) Gnd Con 121.7 (1130–0330Z‡)	
MF 124.7 (0330–1130Z‡ 6 NM irregular shape to below 3000')	
VFR Advisory Detroit App Con 134.3	
Yarmouth, NS (CYQI)	H-11E, L-32I
Moncton Center App/Dep Con 123.9 368.5 MF 123.0 (5 NM to 3100')	
MEXICO	
FACILITY NAME	CHART & PANEL
Abraham Gonzalez Intl (MMCS)	H–4K, L–6F
Juarez App Con 119.9 Juarez Tower 118.9	•
Del Norte Intl (MMAN)	H-7B, L-20G
ATIS 127.55 (1300–0300Z‡)	
Monterrey App 119.75 120.4 Tower 118.6	
Durango Intl (MMDO)	H-7A
ATIS 132.1	
Tower 118.1 Durango Info 122.3	
General Abelardo L Rodriguez Intl (MMTJ)	H-4H, L-4H
ATIS 127.9	•
Tijuana App Con 119.5 120.3 Tijuana Tower 118.1 Tijuana Clnc Del 122.35	
Tijuana Info 132.1	
General Lucio Blanco Intl (MMRX)	H-7B, L-20H
Reynosa App Con 118.8 Reynosa Tower 118.8	•
General Mariano Escobedo Intl (MMMY)	H-7B, L-20G
ATIS 127.7	•
Monterrey App Con 119.75 120.4 Monterrey Tower 118.1 Gnd Con 121.9	
General R Fierro Villalobos Intl (MMCU)	L-6I
ATIS 127.9	
Chihuahua App Con 121.0 Chihuahua Tower 118.4	
General Rodolfo Sanchez Taboada Intl (MMML)	H-4H, L-4J, 5A
ATIS 127.6	
Mexicali App Con 118.2 Mexicali Tower 118.2 Mexicali Info 123.9 122.3	
General Servando Canales Intl (MMMA)	H-7C, L-21A
Matamoros App Con 118.0 Matamoros Tower 118.0	** **
Plan De Guadalupe Intl (MMIO)	H-7B
Saltillo App Con 127.4 Saltillo Tower 118.4	
Quetzalcoati Inti/Nuevo Laredo Inti (MMNL)	H-7B. L-20G
Nuevo Laredo Ann Con 118 3 Nuevo Laredo Tower 118 3	11 10, 2 200

Nuevo Laredo App Con 118.3 Nuevo Laredo Tower 118.3

Torreon Intl (MMTC)
App Con 119.6 Tower 118.5

H-7A

AIRPORT DIAGRAMS

In support of the Federal Aviation Administration's Runway Incursion Program, selected towered airport diagrams hav been published in the Airport Diagram section of the A/FD. Diagrams will be listed alphabetically by associated city an airport name. Airport diagrams, depicting runway and taxiway configurations, will assist both VFR and IFR pilots in groun taxi operations. The airport diagrams in this publication are the same as those published in the U.S. Terminal Procedure Publications. For additional airport diagram legend information see the U.S. Terminal Procedures Publication.

NOTE: Some text data published under the individual airport in the front portion of the A/FD may be more current tha the data published on the Airport Diagrams. The airport diagrams are updated only when significant changes occur.

GENERAL INFORMATION


PILOT CONTROLLED AIRPORT LIGHTING SYSTEMS

Available pilot controlled lighting (PCL) systems are indicated as follows:

- 1. Approach lighting systems that bear a system identification are symbolized using negative symbology, e.g., 🚳, 🔊, 😥 2. Approach lighting systems that do not bear a system identification are indicated with a negative "0" beside the name
- A star (*) indicates non-standard PCL, consult the individual airport in the front portion of the A/FD, e.g., **0***
 To activate lights use frequency indicated in the communication section of the chart with a **0** or the appropriate lighting system identification e.g., UNICOM 122.8 **0**, **a**, •

KEY MIKE	FUNCTION
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-off
3 times within 5 seconds	Lowest intensity available (Lower REII or REII-off)

CHART CURRENCY INFORMATION



The Chart Date indentifies the Julian date the chart was added to the volume or last revised for any reason. The first two digits indicate the year, the last three digits indicate the day of the year (001 to 365/6) in which the latest addition or change was first published.

The Procedure Amendment Number precedes the Chart Date, and changes any time instrument information (e.g., DH, MDA, approach routing, etc.) changes. Procedure changes also cause the Chart Date to change.

MISCELLANEOUS

- ★ Indicates a non-continuously operating facility, see the individual airport in the front portion of the A/FD.
- # Indicates control tower temporarily closed UFN.

10210 IFGFND

INSTRUMENT APPROACH PROCEDURES (CHARTS)

AIRPORT DIAGRAM/AIRPORT SKETCH

Runways			
Hard Surface	Other Than Hard Surface	Stopways,Taxiwa Parking Areas, Water Runways	ys, Displaced Threshold
× × Closed Runway	××× Closed Taxiway	Under Construction	Metal Surface
e.g., BAI not appli	<12, MA-1A etc	cific arresting gear , shown on airpor ilots. Military Pilots ations.	rt diagrams,
uni-d	irectional	bi-directional	Jet Barrier
ARRESTING	G SYSTEM		
REFERENC	E FEATURES		
Obstructio	ns		∧
Airport Be	acon #		☆
Runway			_
Control To	wer #		

When Control Tower and Rotating Beacon are co-located, Beacon symbol will be used and further identified as TWR.

Runway length depicted is the physical length of

Hot Spot(

Runway length depicted is the physical length of the runway (end-to-end, including displaced thresholds if any) but excluding areas designated as stopways.

A **D** symbol is shown to indicate runway declared distance information available, see appropriate A/FD, Alaska or Pacific Supplement for distance information.

Helicopter Alighting Areas ⊕ ⊕ ⊞ ♠ ⊞

Runway Threshold elevation......THRE 123
Runway TDZ elevation......TDZE 123

→ 0.3% DOWN

.....0.8% UP-

(shown when runway slope is greater than or equal to 0.3%) NOTE:

Runway Slope measured to midpoint on runways 8000 feet or longer.

U.S. Navy Optical Landing System (OLS) "OLS" location is shown because of its height of approximately 7 feet and proximity to edge of runway may create an obstruction for some types of aircraft.

Approach light symbols are shown in the Flight Information Handbook.

Airport diagram scales are variable.

True/magnetic North orientation may vary from diagram to diagram

Coordinate values are shown in 1 or ½ minute increments. They are further broken down into 6 second ticks, within each 1 minute increments.


Positional accuracy within ±600 feet unless otherwise noted on the chart.

NOTE:

All new and revised airport diagrams are shown referenced to the World Geodetic System (WGS) (noted on appropriate diagram), and may not be compatible with local coordinates published in FLIP. (Foreign Only)

Runway Weight Bearing Capacity/or PCN Pavement Classification Number is shown as a codified expression.

Refer to the appropriate Supplement/Directory for applicable codes e.g., RWY 14-32 PCN 80 F/D/X/U S-75, D-185, 2S-175, 2D-325



SCOPE

Airport diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations and provide information for updating Computer Based Navigation Systems (I.E., INS, GPS) aboard aircraft. Airport diagrams are not intended to be used for approach and landing or departure operations. For revisions to Airport Diagrams: Consult FAA Order 7910.4.

LEGEND

CITY/AIRPORT

FLD (BOI)

IDAHO FALLS

LEWISTON LEWISTON-NEZ

BILLINGS

GREAT FALLS

EUGENE

PORTLAND PORTLAND INTL (PDX)

SALEM MCNARY FLD (SLE)

PERCE CO (LWS)

BILLINGS LOGAN INTL (BIL)

GREAT FALLS INTL (GTF)

MAHLON SWEET FIELD (EUG)

BOISE

AIRPORT DIAGRAMS HOT SPOTS

runway incursion, and where heightened attention by pilots/drivers is necessary.

A "hot spot" is a runway safety related problem area on an airport that presents increased risk during surface operation:

HOT SPOT

HS₁

HS₁

HS₂

HS 3

HS₁

HS₂

HS₁

HS₂

HS₁

HS 2

HS₁

HS₁

HS₁

NW. 23 SEP 2010 to 18 NOV 2010

Typically it is a complex or confusing taxiway/taxiway or taxiway/runway intersection. The area of increased risk has either

a history of or potential for runway incursions or surface incidents, due to a variety of causes, such as but not limited to

increased risk has been reduced or eliminated.

BOISE AIR TERMINAL/GOWEN

IDAHO FALLS RGNL (IDA)

An "airport surface hot spot" is a location on an aerodrome movement area with a history or potential risk of collision of

IDAHO

MONTANA

OREGON

DESCRIPTION

Rwv 20

authorization.

distance between rwys.

Use extreme caution to stop.

wrong rwy departure risk.

departing on Rwy 13-31.

ATC.

Rwy 10L apch sign for Rwy 10L entrance.

Do not cross hold line for Rwv 17 without

hold line when using Twy C. Rwy 17-35 does not have rwy edge markings and can be mistaken for a

Acft departing Rwy 20 often miss left turn on A1 and taxi past A1 entrance. Do not mistake Rwy 20 apch hold line on Twy A for entrance to

Twy C and Twy G intersection close proximity to

Twy G between Rwy 08-26 and Rwy 30 thld. Short

Rwy 28R hold line is at east edge of run up area, more than 900' taxi distance from the rwy edge.

Twv H crosses Rwv 07 protected area, Do not proceed across Rwy 07 without an ATCT clearance

Acft departing Rwy 21 often miss left turn at Twy A1. There is no rwy access beyond Twy A1.

Twy A3 aligned with Rwy 25. Acft departing Rwy 21 at Twy A3 must verify heading prior to tkf due to

Acft taxiing to Rwy 34L often miss right turn at Twy A8 or Twy A9. Do not mistake Rwy 34L apch hold sign on Twy A south of Twy A9 for rwy entrance.

Limited wing-tip clearance at twy convergence poin Pilots taxiing eastbound on Twy B should hold at the twy holding position marking when directed by

When the ATCT is clsd the rwy holding position marking on the west side of Rwy 16-34 is inside the protected area for Rwy 13-31. Pilots should no hold at this position if other tfc is arriving or

airport layout, traffic flow, airport marking, signage and lighting, situational awareness, and training. Hot spots a depicted on airport diagrams as open circles or polygons designated as "HS 1", "HS 2", etc. and tabulated in the lis

below with a brief description of each hot spot. Hot spots will remain charted on airport diagrams until such time th

Pilots departing Rwy 10L often miss the left turn of

Twy A and continue taxi on Twy J. Do not mixtake Pilots should use caution and look carefully for rwy

MVCHINGLON

	WASHINGI
EVERETT	

/EREII	
SNOHOMISH COUNTY	HS 1
(PAINE FIELD) PAE	

Pilots holding short of Rwy 11-29 at Twy A4 or Twy A5 should use caution to stop prior to the rwy holding position marking. Rwy hold position signs

are located 230' to the right and 350' to the left of the Twy A5 centerline and may be difficult to locate Rwy 29 thld in close proximity to ramp areas. Twv A between Twv A8 and Twv A9 not visible from

ATCT.

Twy Z restricted access area.

Rwy 13R-31L and Twy A9. Wrong rwy departure

risk.

hold bar for Rwy 34R (34C-34R hold bar separation

Confusing twy configuration. Twy A transitions to

Twy B and back to Twy A when taxiing to and from

distance 189').

Rwv 13-31.

HS₂

HS 3

HS₁

HS 2

SEATTLE SEATTLE-TACOMA INTL (SEA) HS 1 Acft Idg Rwy 34C and exiting Twy H who turn right

on Twy J must clear the Rwy 34C hold bar completely, while using vigilance not to cross the

WYOMING

CHEYENNE CHEYENNE RGNL/JERRY OLSON


FIELD (CYS)


SEATTLE


BOEING FIELD/KING


COUNTY INTL (BFI)


HS 1

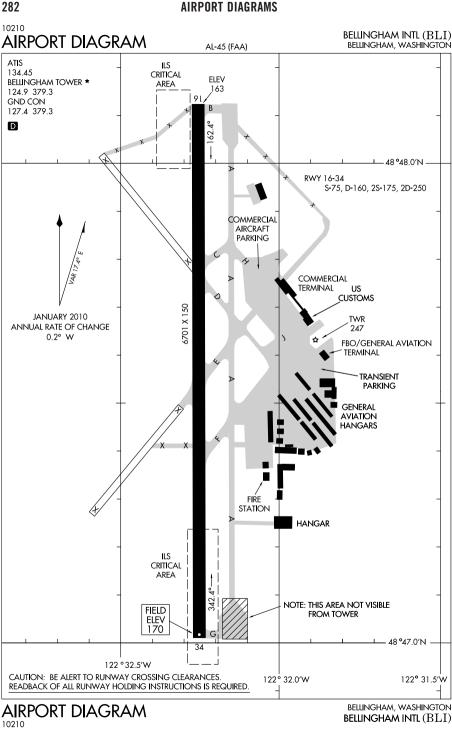


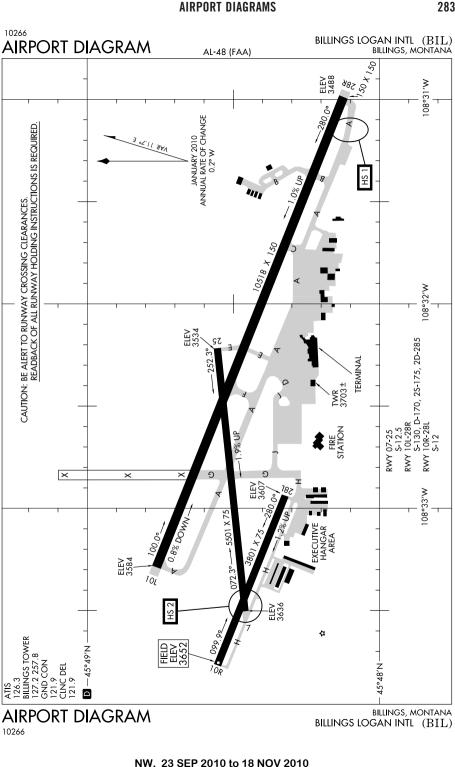


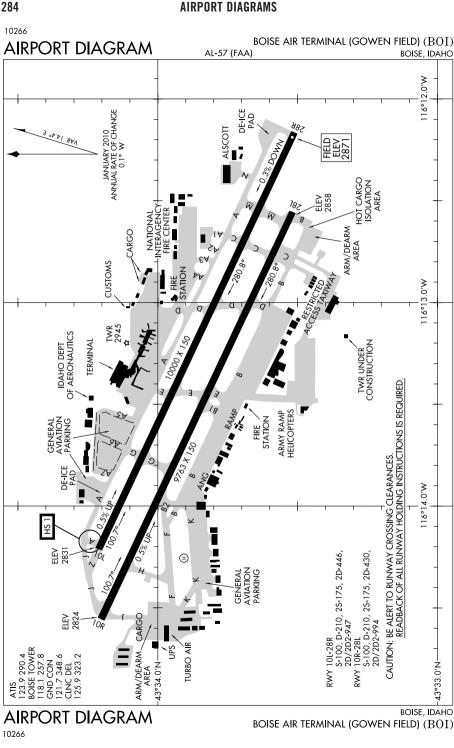

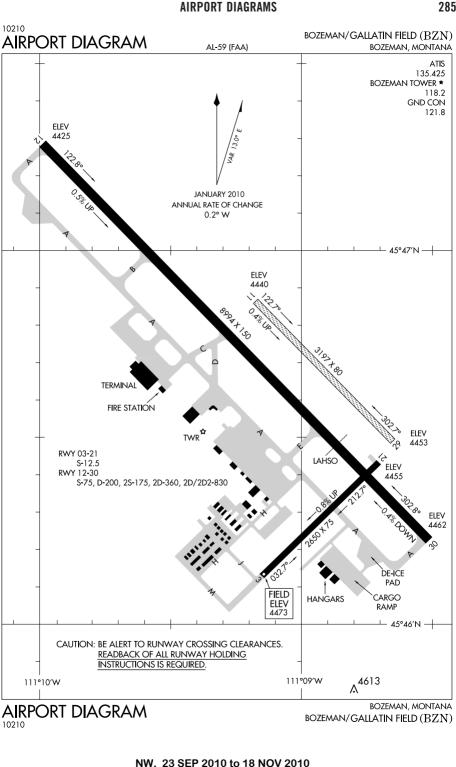

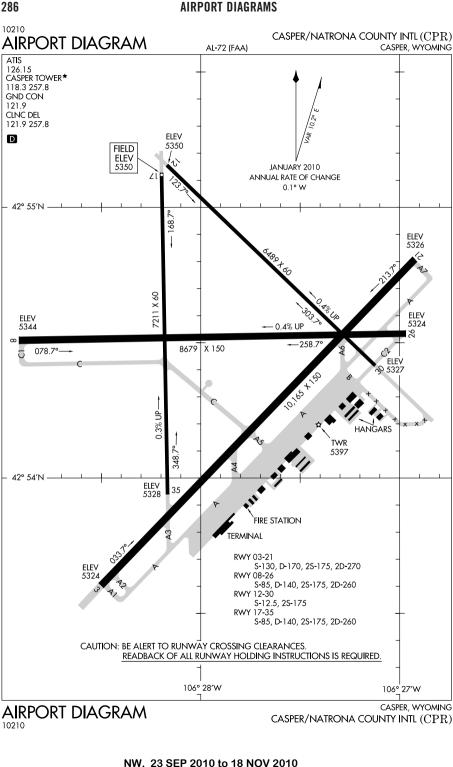


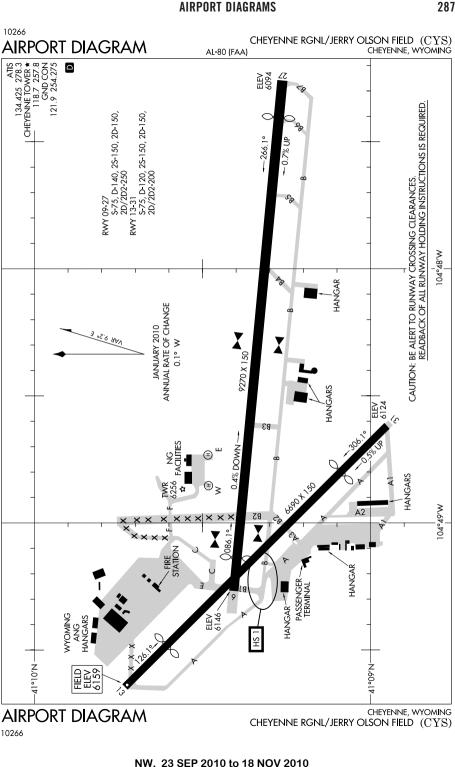


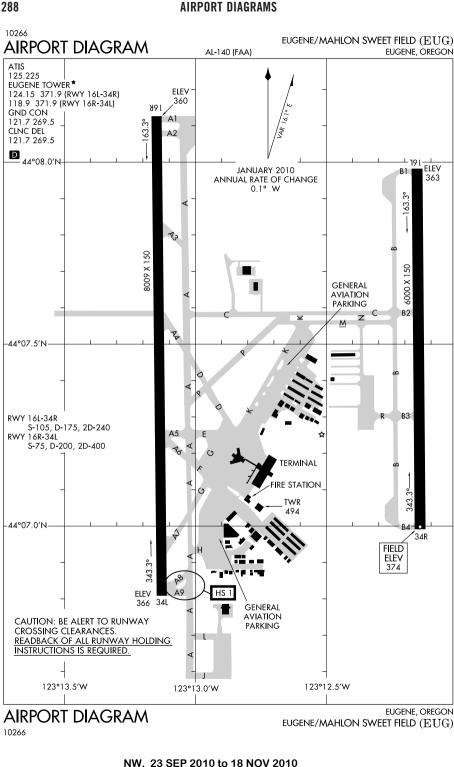






MS 289

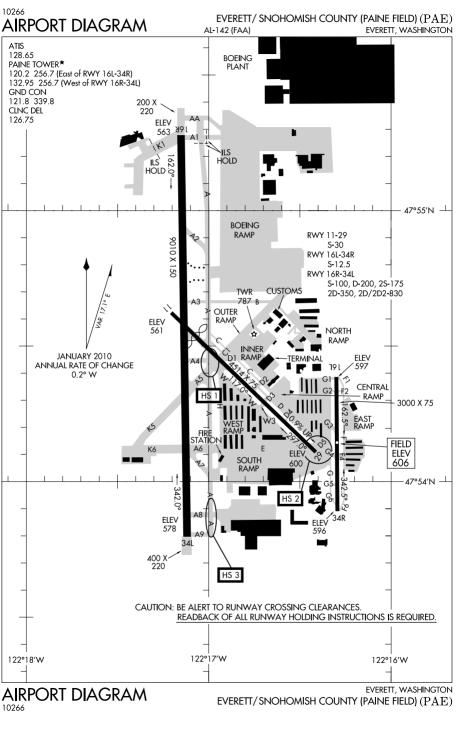


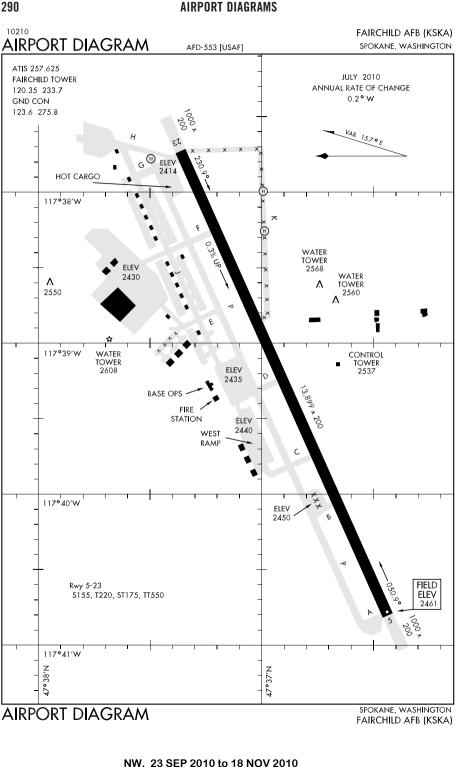


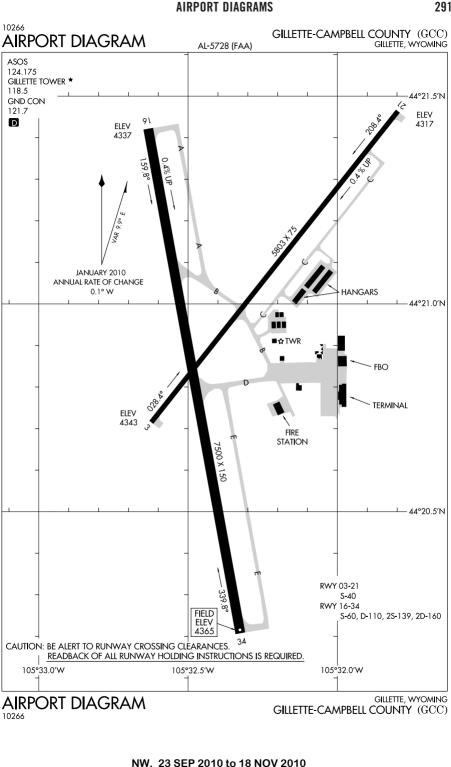


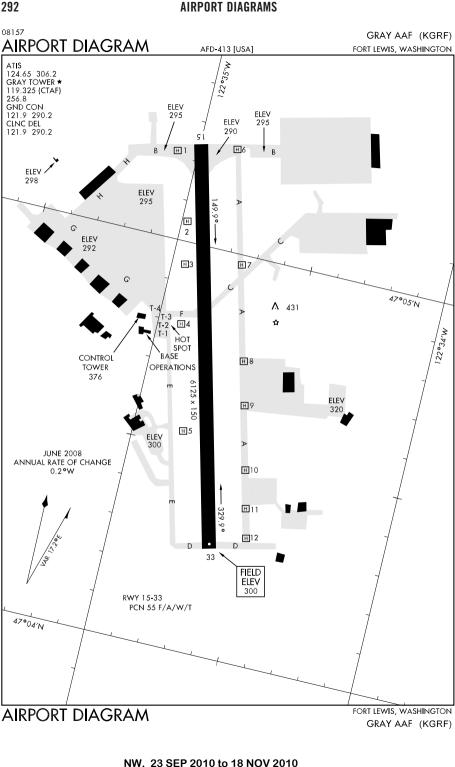


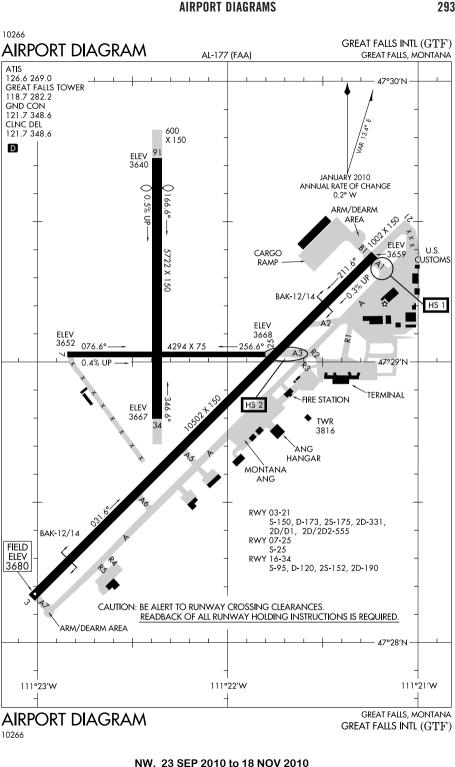


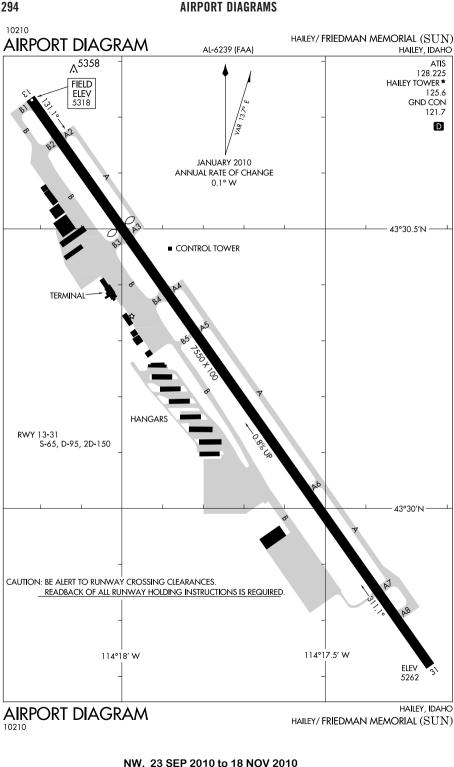


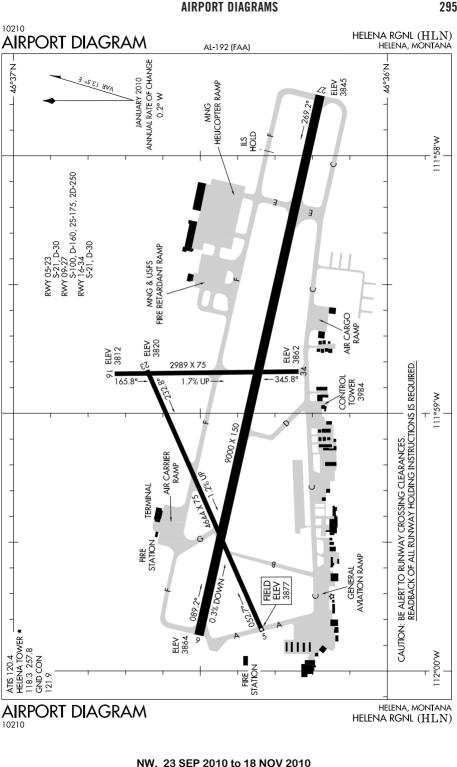


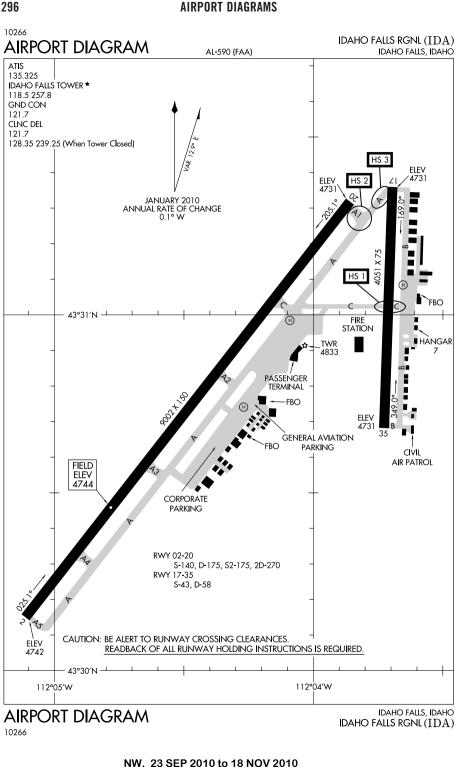


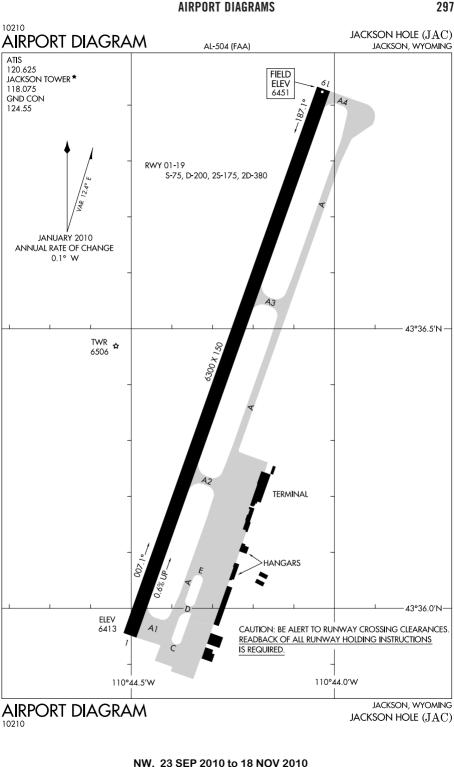


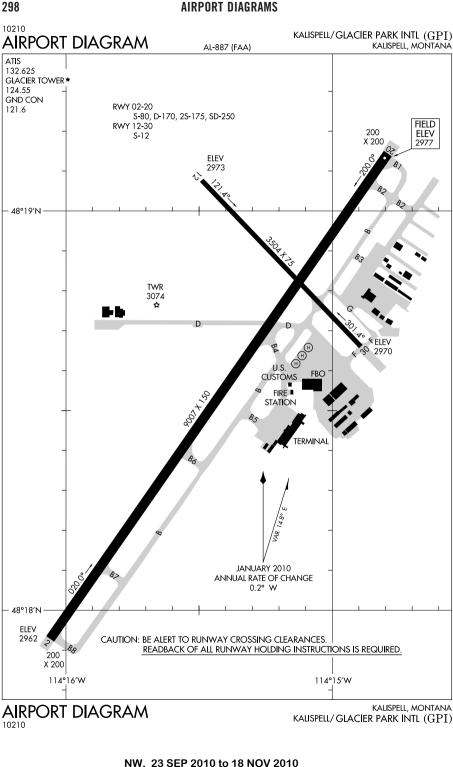


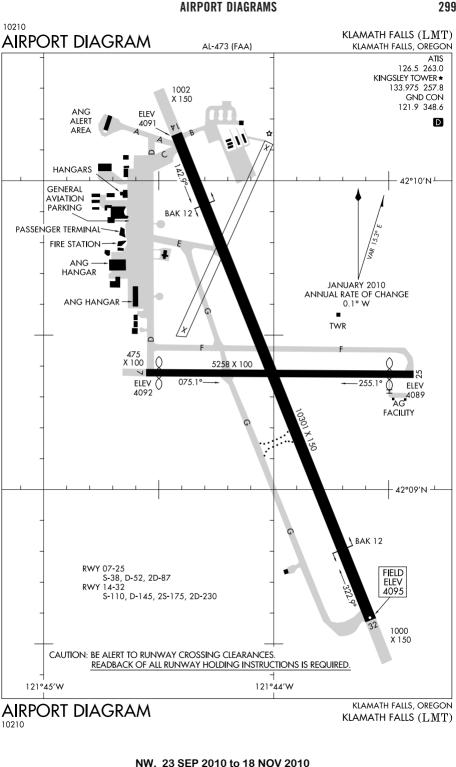


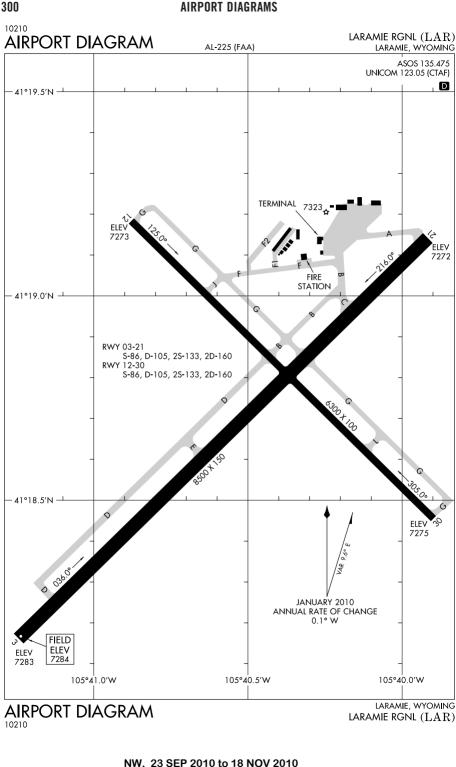


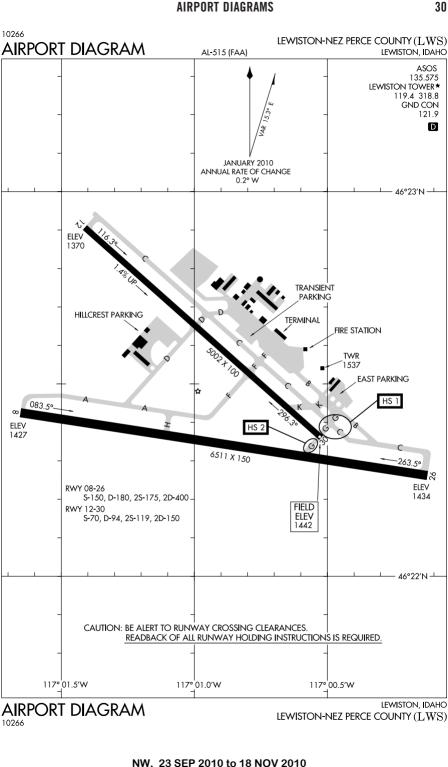


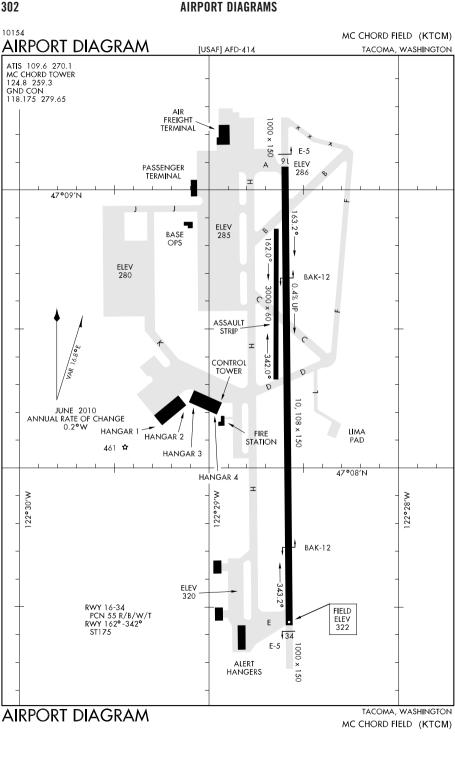


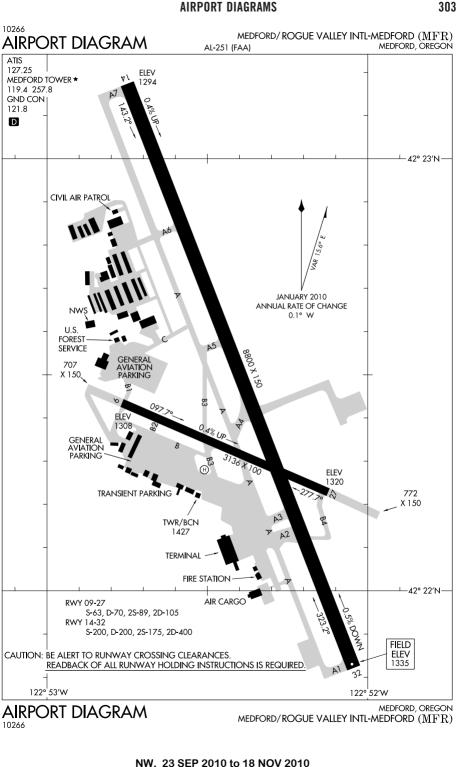


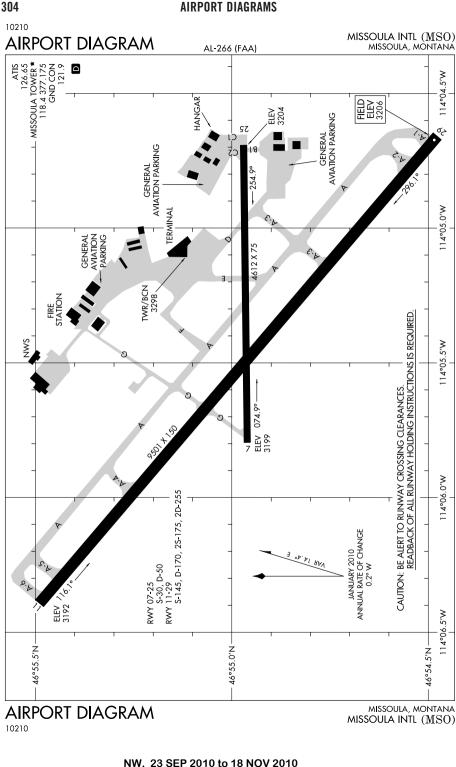


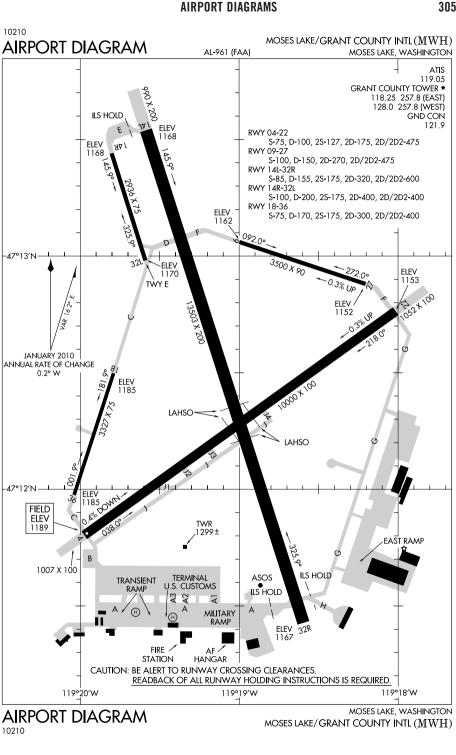


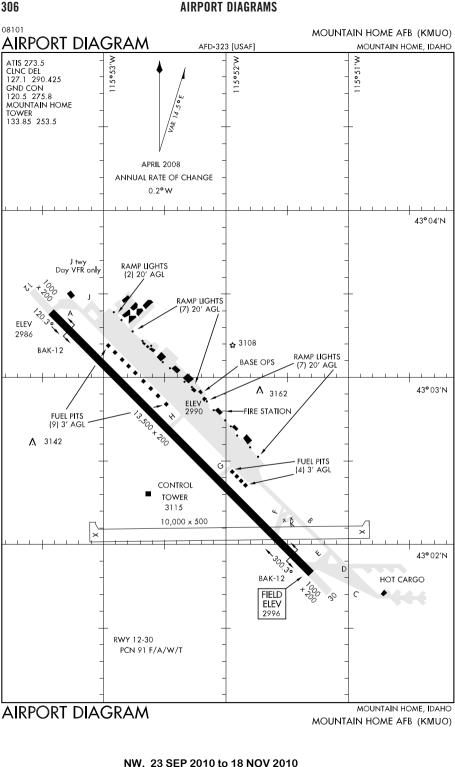


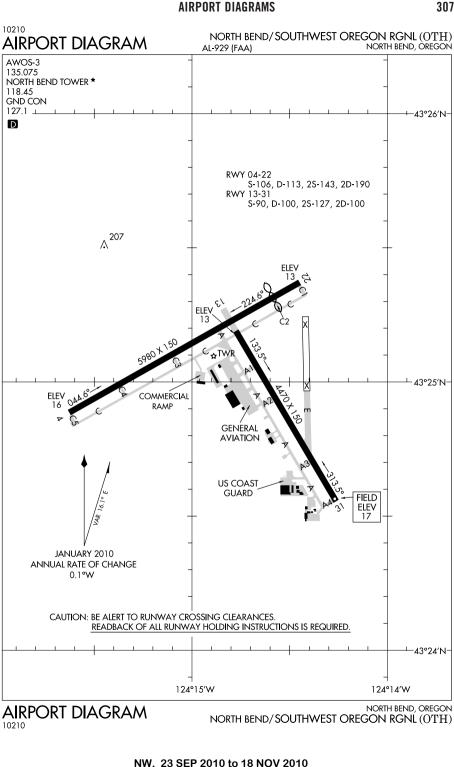


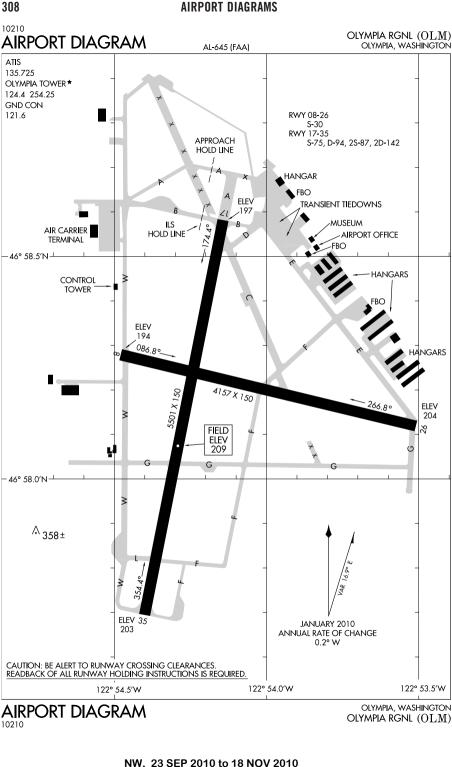


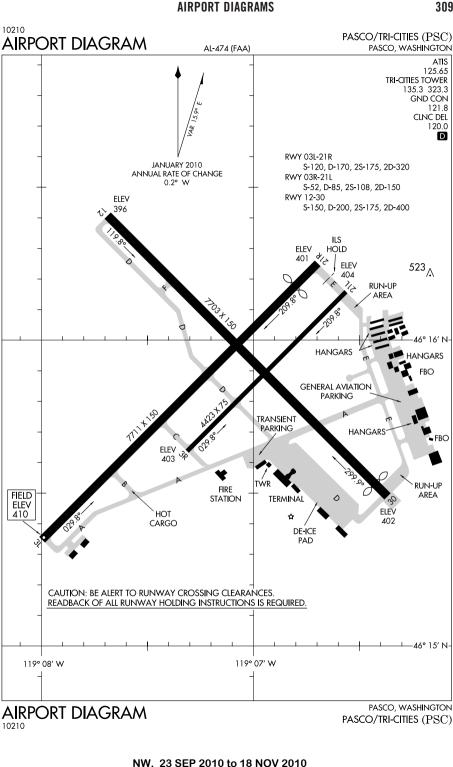


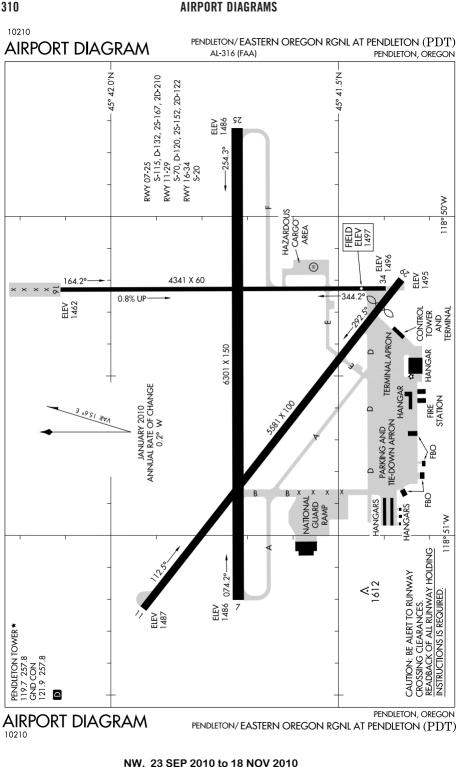


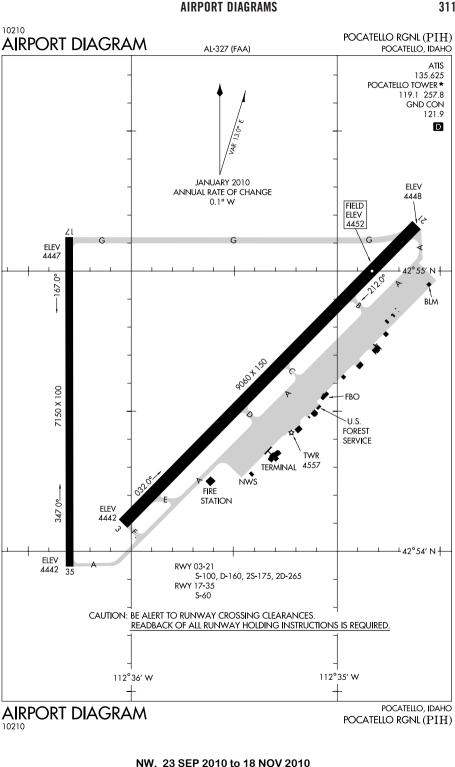


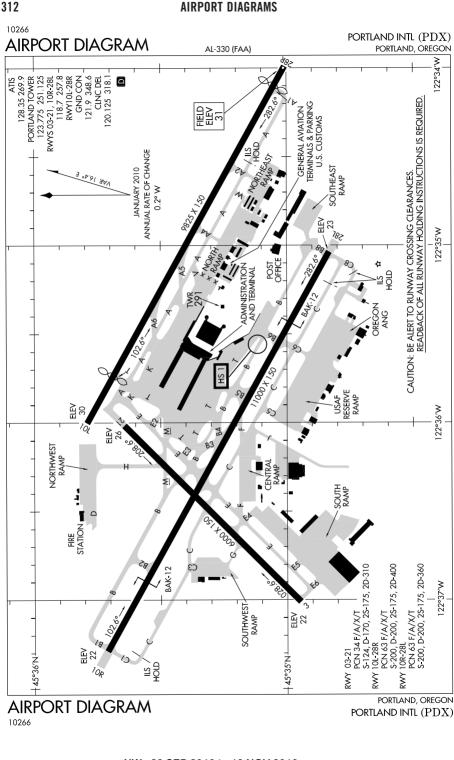


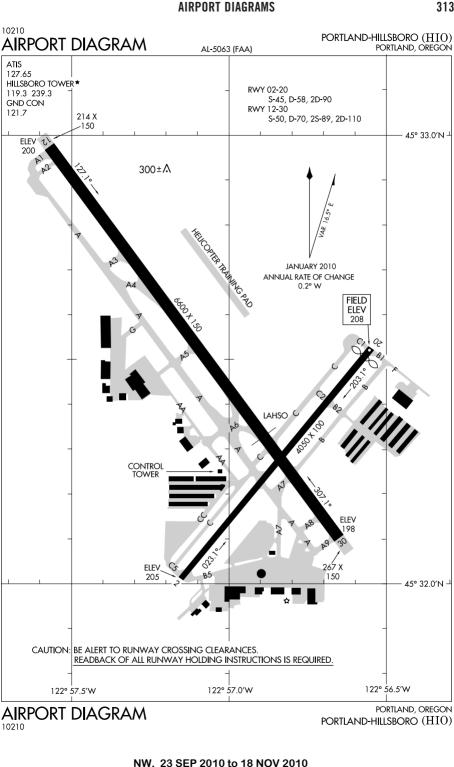


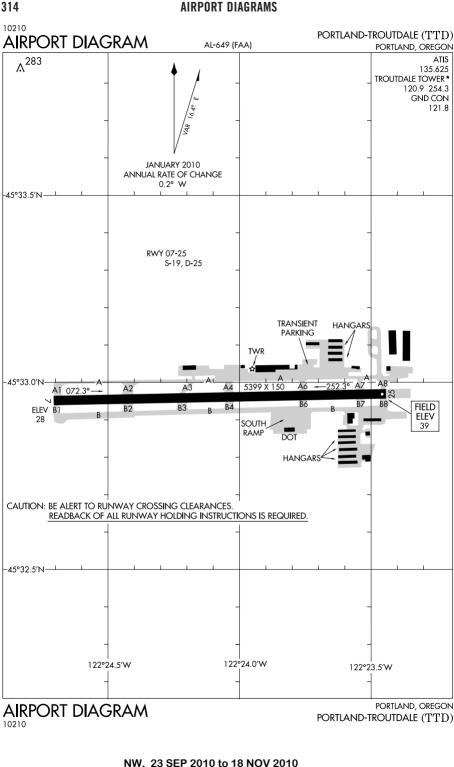


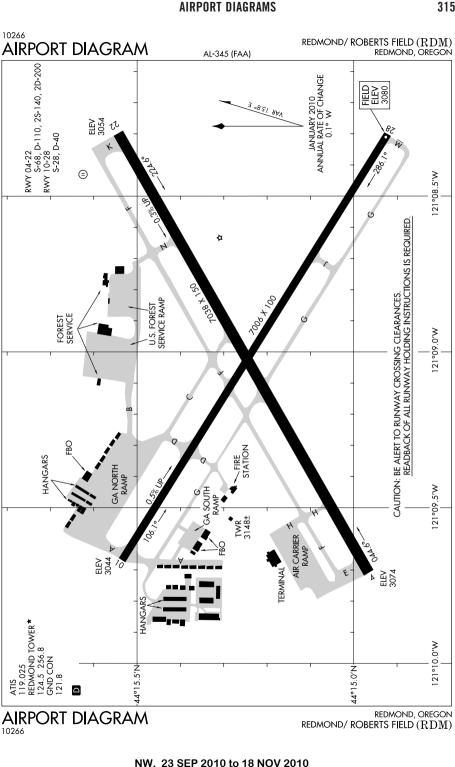

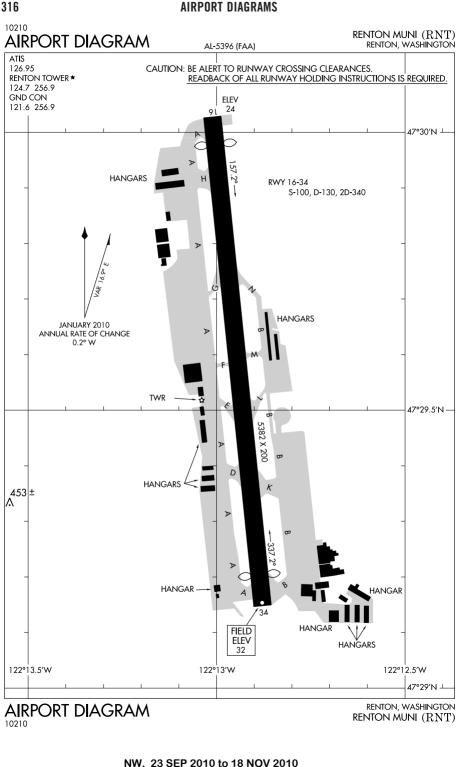

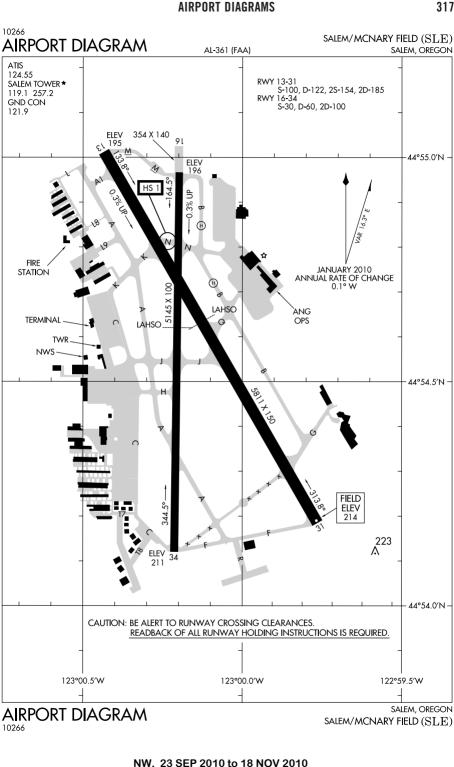


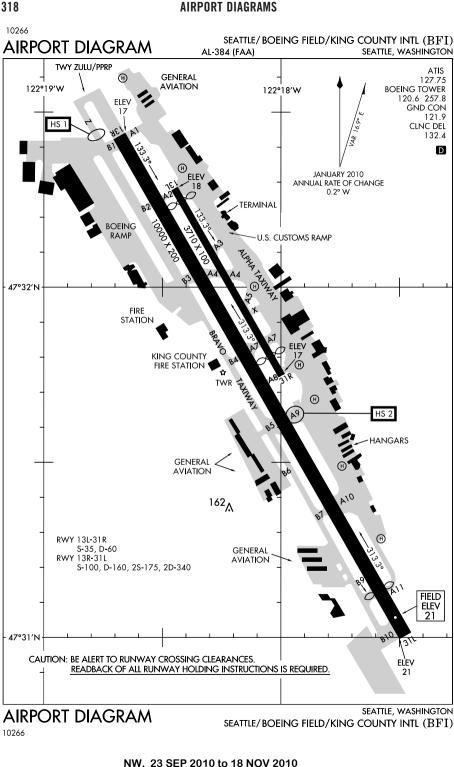


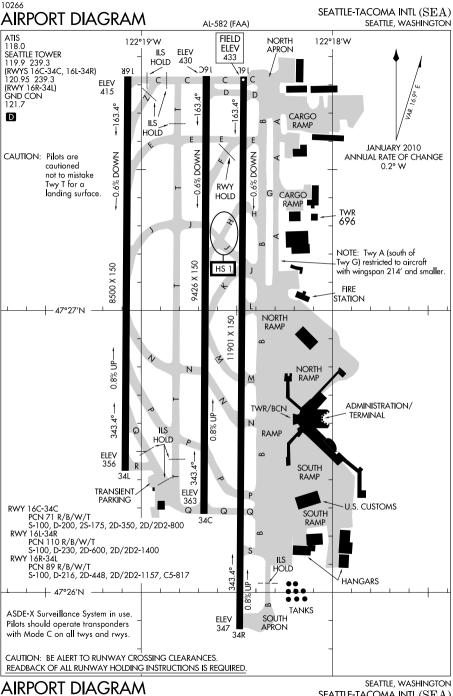



10266


SEATTLE-TACOMA INTL (SEA)

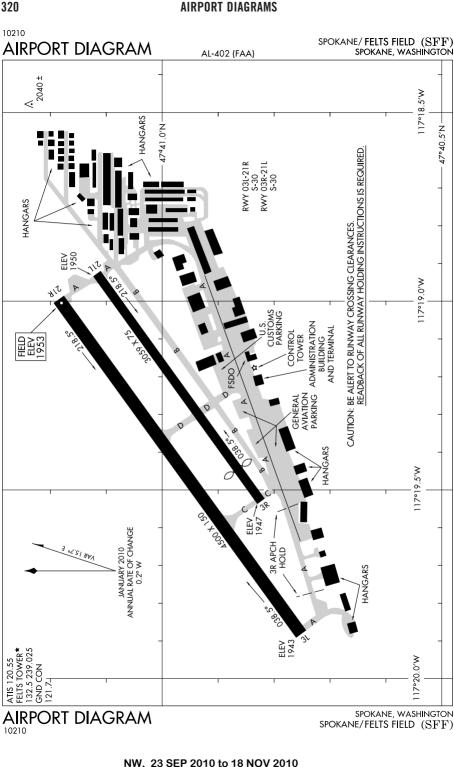


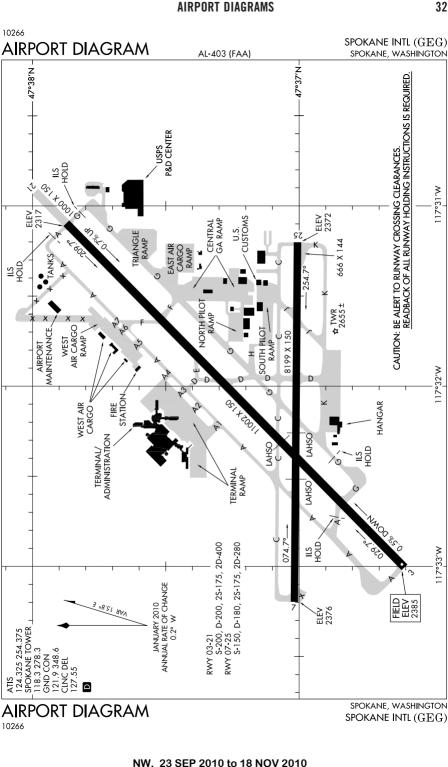


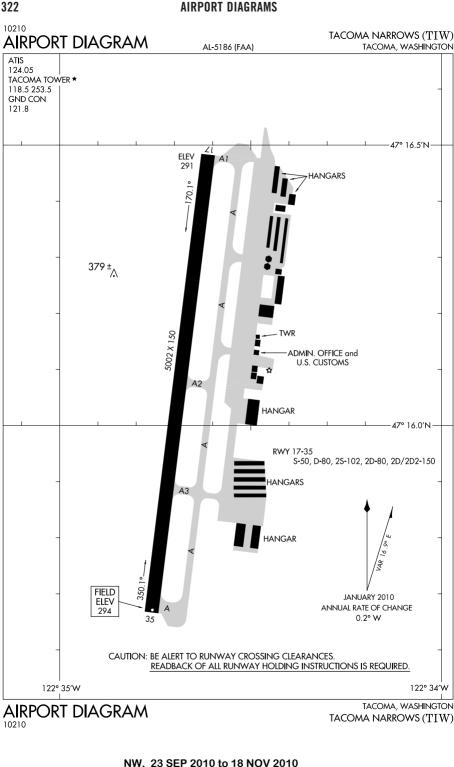

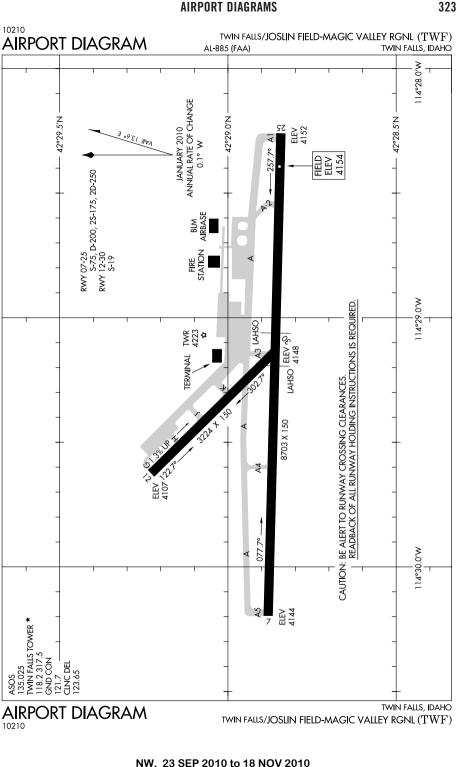

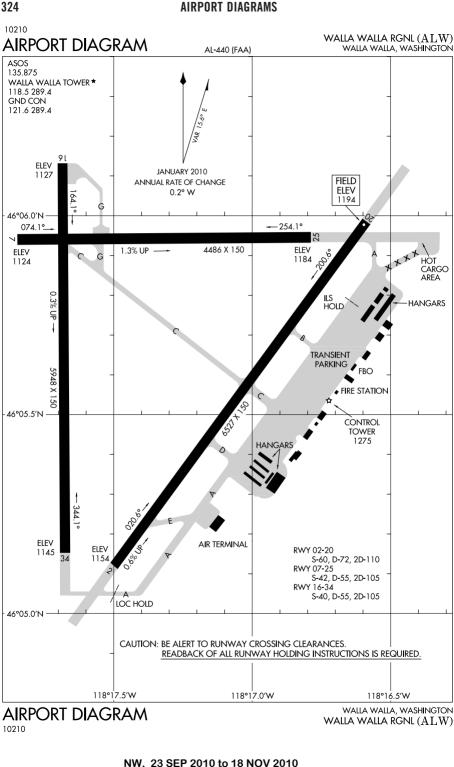

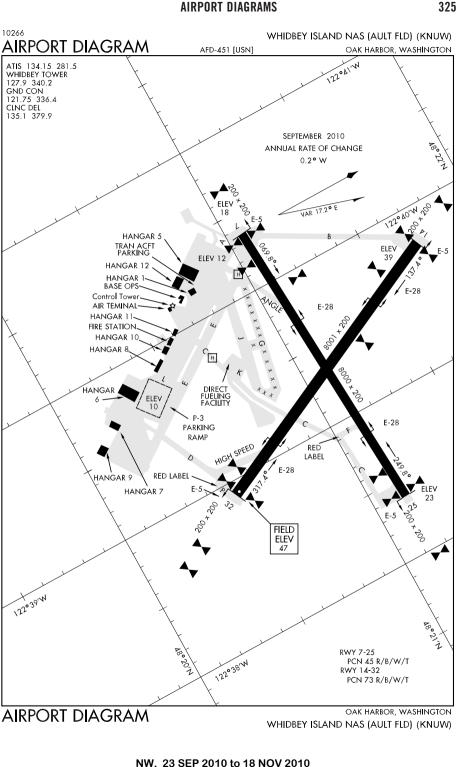

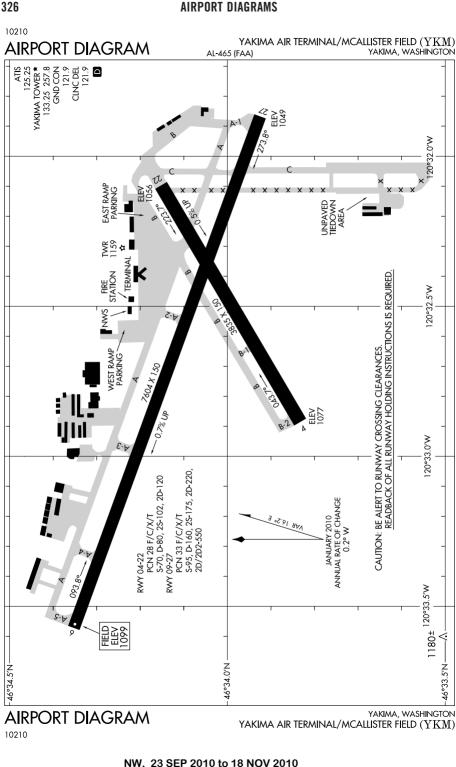

INTENTIONALLY LEFT BLANK

